

#30BLP12SNDAFMBK | #30BLP12STNAFMBK | #30BLP12TNMAFMBK

## Automatic Soap / Sanitizer Dispenser

### Warning:

Take care not to spill any liquids into the dispenser when filling as this can interfere with the components inside that allow the unit to function properly.

### Mounting Instructions:

1. Find a suitable installation location that complies with applicable guidelines.
2. Locate the hardware kit that comes with the unit. It will include four screws, washers, and drywall anchors, as well as one blue key.
3. Use the blue key to open the unit by putting it into the keyhole located at the top of the unit and twisting until the front cover opens.
4. Remove the liquid container inside to give you access to the back plate. It is recommended that you grab the container by the sides to pull it out.
5. With the unit open, hold the unit against the desired mounting location and use a marking tool to mark each screw hole on the wall through the dispenser. When done, set aside the dispenser.
6. Drill holes into the marked locations and insert the drywall anchors into each hole.
7. While holding the dispenser against the wall, thread a screw through a washer and screw it into one of the drilled holes. Repeat this step for each screw.
8. Once the unit is fully mounted, replace the previously removed liquid container. Make sure the container is fully into place.

#30BLP12SNDAFMBK | #30BLP12STNAFMBK | #30BLP12TNMAFMBK

# Automatic Soap / Sanitizer Dispenser

## Loading Batteries:

### STEP 1


Before filling, it is recommended that batteries are loaded into the unit. Four AA batteries (not included) are required for operation of this unit.

### STEP 3

Insert batteries by sliding them into place into the battery chambers. Ensure the batteries are inserted with the correct polarity; the symbols on the interior of the chambers will indicate how to do this.

### STEP 2

Open the unit's front cover and use the diagram to locate where the battery housing cover is. Remove the battery housing cover.

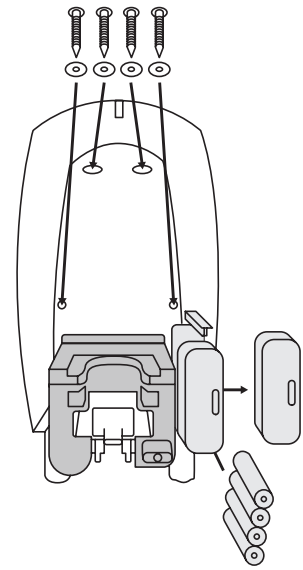

### STEP 4

Replace the battery cover.

## Operational Features:

The unit features an LED battery status indicator light that details the battery life left.

**Green** = Charge level full.

**Yellow** = Charge level medium.

**Red** = Charge level low.

**Flashing red** = Batteries will need to be replaced very soon.

## Cleaning:

A damp cloth is recommended to remove dust or other dirt when needed.