



12 Bushel Metal Laundry Cart

Use and Care Guide

09/2026



User Safety



WARNING
To prevent personal injury.

Prevent Misuse: Do not sit, stand, shake, lean, jump, or climb on cart.

Storage: This cart is intended for commercial cleaning and maintenance use. When not in use, store indoors. Do not store the unit in areas that may block emergency exits or public pathways.

Note: Do not store or throw away items that contain liquid in the cart. This unit is intended for use with dry items only.

Weight Capacity: The unit's total weight capacity is 130 lb. Do not exceed the listed weight capacity.

Cleaning and Maintenance

Daily Cleaning: Remove loose debris and wipe down with a damp cloth or mild soap solution to prevent buildup.

Assembly Inspection: Regularly inspect parts and ensure structural integrity.

Washing Bag: Hand washing is recommended.

Avoid Machine Drying: Do not machine dry the bag. Air-dry only.

Note: If machine washing the bag is required, use the gentle cycle, cold water, and mild detergent.

Avoid Ironing: Do not iron the bag.

Inspect Wheels: Do not use the cart if the wheels are damaged or worn.

12 Bushel Metal Laundry Cart

Use and Care Guide



Assembly

Step 1 - Locate the Side Frame Supports

- Orient the mounting holes on both side frame supports so they face inward toward each other.
- Ensure the casters are resting on the floor.


Step 2 - Install the Bottom Frame Support

- Align the ends of the bottom frame support with the lower mounting points on the side frame support 1.
- Place a washer onto each exposed threaded stud. Thread an acorn nut onto each stud by hand.
- Repeat the process above for the side frame support 2.
- Hand tighten all four acorn nuts evenly until the frame is rigid and secure.

NOTE: Do not overtighten, as this may damage the hardware or frame.

Step 3 - Install the Top Frame Support

- Align the ends of the top frame with the upper mounting points on both side frame supports.
- Place a washer onto each exposed threaded stud.
- Thread an acorn nut onto each stud by hand.
- Hand tighten all four acorn nuts evenly until the frame is rigid and secure.
- **NOTE: Do not overtighten, as this may damage the hardware or frame.**

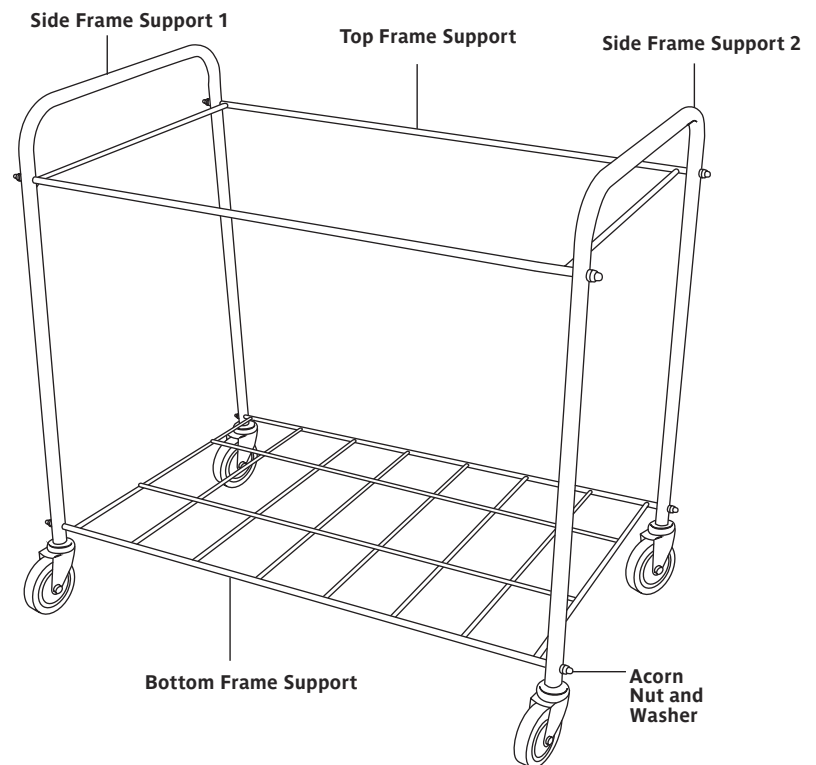

Step 4 - Final Inspection

- Verify that the top and bottom frames are fully seated in the side frame sections.
- Confirm that all four acorn nuts are securely tightened.
- Check that the cart stands level and that all casters roll freely.
- Install the canvas bag. Wrap the canvas bag over the top rack. Secure with the clasp.

