



Hot or Cold in one shelf!



**PATENT
PENDING**



HCSBF-48-S



HCSSB-4818



HCSSBF-48-S

The Ultimate in Versatility!


Give your operation ultimate flexibility with Hatco's new, innovative Hot/Cold Built-In Shelves (patent pending). Available in our signature Hardcoat or in Swanstone®, they easily transition between a heated to cold and cold to heated shelf!

- The shelves quickly change modes from hot to cold or vice versa in as little as 60 minutes, allowing quick change from different day parts
- Hardcoat models are top mount while Swanstone® models are bottom mounted, flush with counter top
- Control box can be mounted on the front of the cabinet, 4" (1229 mm) from center of shelf
- Condensing unit may be mounted up to 4' away from the center of shelf
- Thermal break reduces condensation and temperature transfer
- The flush mount control comes standard with a 4' (1229 mm) lead wire
- Cold Only Built-In Shelves are also available
- See Specification Sheet on website for full Option/Accessories




COMPONENT

PLUS, COLD ONLY SHELVES!



CSBF-48-S



CSU-48-S



CSSB-4818




CSSBF-48-S





Hot/Cold and Cold Built-In Shelves



Models: HCSBF, CSBF, HCSSB, CSSB, HCSSBF, CSSBF, CSU

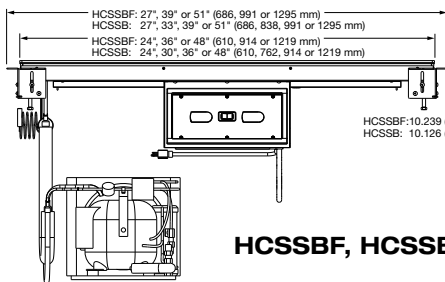



HCSBF, HCSSB

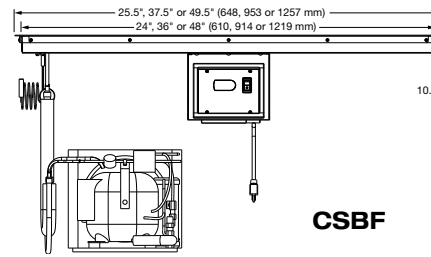



CSBF

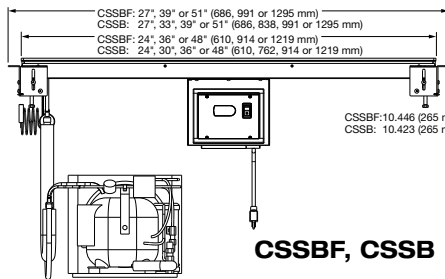


CSSBF, CSSB

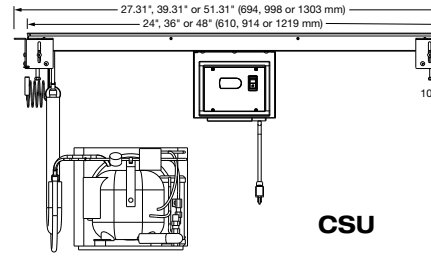

CSU

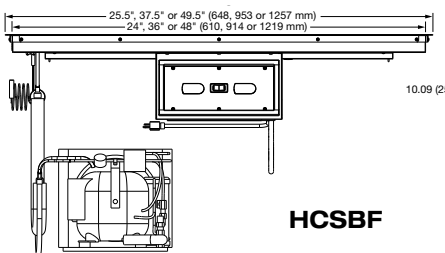

HCSBF



SPECIFICATIONS - All units 120V, single phase, NEMA 5-15P Plug Hot/Cold and Cold Shelf - Built-In, Flush Top (Aluminum)


Model*	Dimensions (Width x Depth)	Compressor Size	Watts	Amps
HCSBF-24-F, CSBF-24-F	24" x 15.5" (610 x 394 mm)	1/4 HP	804	6.7
HCSBF-24-I, CSBF-24-I	24" x 19.5" (610 x 495 mm)			
HCSBF-24-S, CSBF-24-S	24" x 24" (610 x 610 mm)	1/4 HP	804	6.7
HCSBF-36-F, CSBF-36-F	36" x 15.5" (914 x 394 mm)			
HCSBF-36-I, CSBF-36-I	36" x 19.5" (914 x 495 mm)	1/3 HP	1044	8.7
HCSBF-36-S, CSBF-36-S	36" x 24" (914 x 610 mm)			
HCSBF-48-F, CSBF-48-F	48" x 15.5" (1219 x 394 mm)	1/3 HP	1044	8.7
HCSBF-48-I, CSBF-48-I	48" x 19.5" (1219 x 495 mm)			
HCSBF-48-S, CSBF-48-S	48" x 24" (1219 x 610 mm)	1/2 HP	1380	11.5

Hot/Cold and Cold Swanstone Shelf - Built-In

Model*	Dimensions (Width x Depth)	Compressor Size	Watts	Amps
HCSSB-2418, CSSB-2418	24" x 18" (610 x 457 mm)	1/4 HP	804	6.7
HCSSB-3018, CSSB-3618	30" x 18" (762 x 457 mm)			
HCSSB-3618, CSSB-3018	36" x 18" (914 x 457 mm)	1/3 HP	1044	8.7
HCSSB-4818, CSSB-4818	48" x 18" (1219 x 457 mm)			

PLUG CONFIGURATION FOR ALL UNITS

NEMA 5-15P



PRODUCT SPECS Hot/Cold and Cold Built-In Shelves

The Hot/Cold or Cold Shelf, patent pending, shall be model ... as manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The Hot/Cold or Cold Shelf shall be rated at ... watts, ... volts, and ... inches (millimeters) in overall width.

Hot/Cold and Cold Swanstone Shelf - Flush Top

Model*	Dimensions (Width x Depth)	Compressor Size	Watts	Amps
HCSSBF-24-F, CSSBF-24-F	24" x 15.5" (610 x 394 mm)	1/4 HP	804	6.7
HCSSBF-24-I, CSSBF-24-I	24" x 19.5" (610 x 495 mm)			
HCSSBF-24-S, CSSBF-24-S	24" x 24" (610 x 610 mm)	1/4 HP	804	6.7
HCSSBF-36-F, CSSBF-36-F	36" x 15.5" (914 x 394 mm)			
HCSSBF-36-I, CSSBF-36-I	36" x 19.5" (914 x 495 mm)	1/3 HP	1044	8.7
HCSSBF-36-S, CSSBF-36-S	36" x 24" (914 x 610 mm)			
HCSSBF-48-F, CSSBF-48-F	48" x 15.5" (1219 x 394 mm)	1/3 HP	1044	8.7
HCSSBF-48-I, CSSBF-48-I	48" x 19.5" (1219 x 495 mm)			
HCSSBF-48-S, CSSBF-48-S	48" x 24" (1219 x 610 mm)	1/2 HP	1380	11.5

Cold Shelf - Under Mount (Aluminum)

Model*	Dimensions (Width x Depth)	Compressor Size	Watts	Amps
CSU-24-F	24" x 15.5" (610 x 394 mm)	1/4 HP	804	6.7
CSU-24-I	24" x 19.5" (610 x 495 mm)			
CSU-24-S	24" x 24" (610 x 610 mm)	1/4 HP	804	6.7
CSU-36-F	36" x 15.5" (914 x 394 mm)			
CSU-36-I	36" x 19.5" (914 x 495 mm)	1/3 HP	1044	8.7
CSU-36-S	36" x 24" (914 x 610 mm)			
CSU-48-F	48" x 15.5" (1219 x 394 mm)	1/3 HP	1044	8.7
CSU-48-I	48" x 19.5" (1219 x 495 mm)			
CSU-48-S	48" x 24" (1219 x 610 mm)	1/2 HP	1380	11.5

*All models are 120 volts, single phase with NEMA 5-15P plug

It shall consist of food-safe material, Condenser attached to Evaporator with 5 foot (1524 mm) flexible tubing, adjustable bracket with cord and plug attached.

Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (800) 558-0607 | (414) 671-6350

Fax: (800) 543-7521 | Int'l. Fax: (414) 671-3976 | www.hatcocorp.com | email: equipsales@hatcocorp.com