

Changing Vend Amount on Greenwald Coin Slides

Please refer to the line drawings and parts list to aid in part identification.


To Change the vend price from .50 to .75 on a Greenwald Coin Slide.

With the coin slide off or out of the vender, remove the slide return spring (item #15) from the slide stop (item #22) place .50 in the slide and push the slide all the way in. Loosen the two screws (item #11) while holding the buffer (item #26) with your other hand, now turn the slide over and remove the buffer (item #26). Remove the blockout key (item #24) from the number 4 position and replace the buffer (Item #26) with the stamped "UP" facing you. Hold the buffer in place and turn the slide over, insert the two screws (item #11) and lightly tighten making sure the buffer (item #26) is seated flush, then tighten. Pull the slide (item #12) back thru the body (item #10) and attach the slide return spring (item #15) to the slide stop (item #22). Place three quarters in the slide and test vend.

Note: If you are changing to \$1.00, remove the number 4 and number 5 blockout keys.

★SPECIFY VEND PRICE

★★QUANTITY DEPENDS UPON VEND PRICE SELECTED

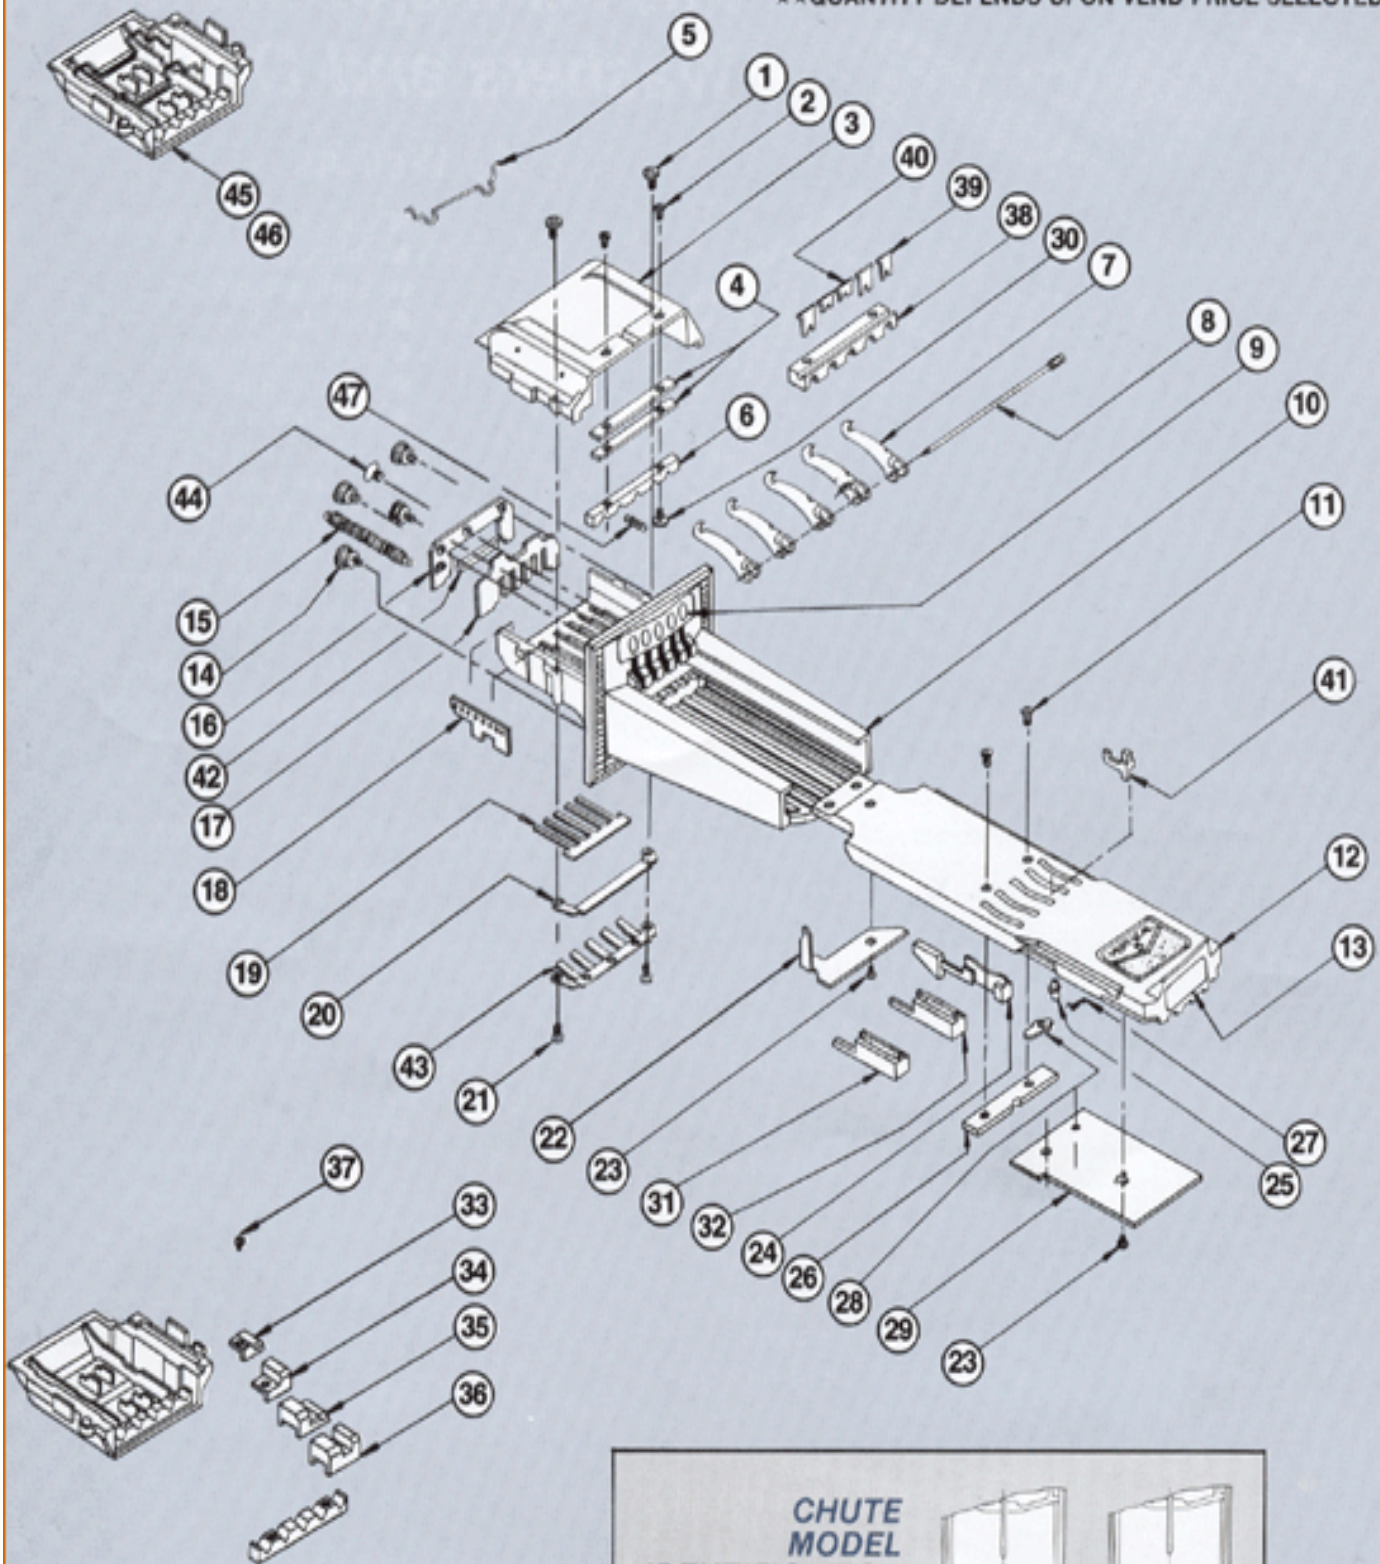

CHUTE
MODEL
IDENTIFICATION
NUMBER ON
BOTTOM OF
CHUTE



FIG. 1



FIG. 2

V5 Parts List

Item	Description	Required	Part Number
1	SCREW (METRIC)	2	00-7924
2	SCREW (METRIC)	2	00-7938
3	TOP HOUSING	1	27-3022
4	SHIM	2	27-2009
5	COIN RETAINER	optional	00-8165
6	COIN SIZING BLOCK	1	27-3003
7	SLIDE STOP DOG	5	27-2030
8	DOG SHAFT	1	27-4000
9	DECAL, CASTING	1	00-9910
10	BODY CASTING	1	27-3029
11	SCREW (METRIC)	2	00-7935
12	COIN SLIDE	1	27-3028
13	DECAL, SLIDE	1	00-9104
14	CHUTE LOCATING SCREW	4	00-7483
15	SLIDE RETURN SPRING	1	00-8148
16	GATE COVER	1	27-2035
17	GATE	1	27-2029
18	RACK	1	27-2031
19	5 FINGER SPRING	1	00-8159
20	SPRING PROTECTOR	1	27-2008
21	SCREW (METRIC)	2	00-7931
22	SLIDE STOP	1	27-2004
23	SCREW (METRIC)	1	00-7923
24	BLOCKOUT KEY	varies	27-5000
25	RATCHET DOG POST	1	20-4005
26	BUFFER	1	27-2007
27	RATCHET DOG SPRING	1	00-8123
28	RATCHET DOG	1	20-2041
29	STORAGE COVER	1	27-2032
30	SCREW	optional	00-7938
31	5¢ INSERT	varies	27-5011
32	10¢ INSERT	varies	20-3023

33	COIN SIZING BLOCK (5¢)	varies	27-3008
34	COIN SIZING BLOCK (10¢)	varies	27-3007
35	COIN SIZING BLOCK (5¢ x 10¢)	varies	27-3009
36	COIN SIZING BLOCK (10¢ x 10¢)	varies	27-3010
37	SCREW (METRIC)	varies	00-7936
38	SIZING PLATE HOUSING	---	-----
39	SIZING PLATE (25¢)	---	-----
40	SIZING PLATE (\$1.00)	---	-----
41	INSERT (25¢)	---	-----
42	MAGNET	optional	00-9255
43	PRESSURE SPRING ASSEMBLY	optional	27-1016
44	SCREW	optional	00-7541
45	TOP HOUSING ASSEMBLY (U.S.)	optional	27-1027-1
46	TOP HOUSING ASSEMBLY (Canada 0-\$2.75)	---	-----
47	SPRING	optional	30-54