

#274AFS3BAT

13" 3 Gallon Walk-Behind Auto Floor Scrubber

BATTERY-OPERATED



NOTE: THE BATTERY DOES NOT SHIP PRE-CONNECTED. PLEASE SEE THE WIRING DIAGRAM TO CONNECT YOUR BATTERY BEFORE USE.

PLEASE READ ENTIRE MANUAL BEFORE USE

12/2024


Table of Contents

Wiring Diagram.....	3
General Safety Rules	4
Specific Safety Rules	5
Technical Specifications	6
Installation Instructions	7
Operation & Maintenance	8
Safety Information	11
Component Structure.....	12
Brush Assembly Diagram.....	13

Wiring Diagram

The battery is located inside the housing of the machine and is NOT currently connected. Please follow the below wiring diagram and steps to connect your battery before using this scrubber.

1. Make sure the battery is placed firmly within the housing.
2. Hook up the positive (red) cord to the positive battery terminal (red) and the negative cord (black) to the negative battery terminal (black).

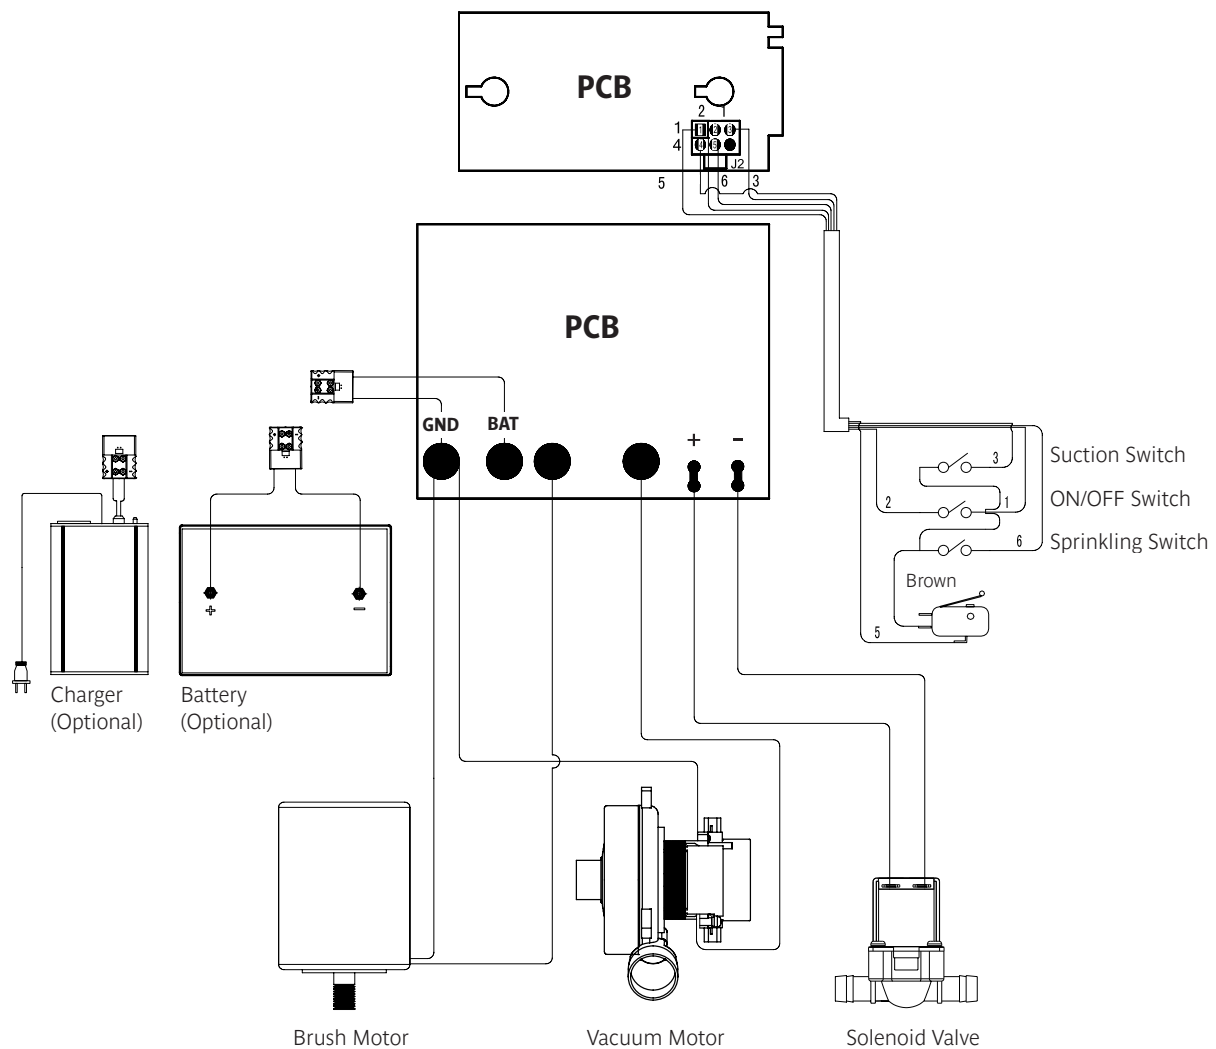

General Safety Rules

WARNING: Read all safety warnings and instructions prior to use.

Failure to follow all warnings and instructions may result in electric shock, fire, and/or serious injury.

SAVE ALL WARNINGS AND INSTRUCTIONS FOR FUTURE REFERENCE.

The term "floor scrubber" in the warnings refers to your battery-operated floor scrubber.

1. WORK AREA SAFETY

- a. Keep work area clean and well lit during operation.
- b. Do not operate floor scrubber in explosive atmospheres, such as in the presence of flammable liquids, gases, or dust.
- c. Keep children and bystanders away while operating a floor scrubber to avoid potential injury.

2. ELECTRICAL SAFETY

- a. Avoid body contact with grounded surfaces, such as pipes, radiators, ranges, and refrigerators.
- b. Do not expose floor scrubbers to rain or wet conditions. Water entering the floor scrubber will increase the risk of electric shock.
- c. If operating a floor scrubber in a damp location is unavoidable, use a residual current device (RCD) protected supply. Use of an RCD reduces the risk of electric shock.

3. PERSONAL SAFETY

- a. Stay alert, watch what you are doing, and use common sense when operating a floor scrubber. Do not use a floor scrubber while you are tired or under the influence of drugs, alcohol, or medication.
- b. Always use appropriate personal protective equipment. Always wear eye protection. Protective equipment such as a dust mask, non-skid safety shoes, hard hat, or hearing protection used for appropriate conditions can reduce personal injuries.
- c. Ensure the switch is in the off-position before connecting to power source, picking up, or carrying the tool. Carrying floor scrubbers with your finger on the power switch may cause accidents.
- d. Make sure that you are balanced and stable before operation. Keep proper footing and balance at all times. This enables better control of the floor scrubber in unexpected situations.
- e. Dress properly. Do not wear loose clothing or jewelry. Keep your hair, clothing, and gloves away from moving parts. Loose clothes, jewelry, or long hair can be caught in moving parts.
- f. Always stay alert during machine operation. A lack of awareness while in use can cause severe injury.

4. FLOOR SCRUBBER USE AND CARE

- a. Use the correct floor scrubber for your application. The correct floor scrubber will do the job better and safer at the rate for which it was designed.
- b. Do not use the floor scrubber if the switch does not turn it on and off. Any floor scrubber that cannot be controlled with the switch is dangerous and must be repaired.
- c. Disconnect your floor scrubber from the power source before making any adjustments, changing accessories, or storing the unit. Such preventive safety measures reduce the risk of starting the floor scrubber accidentally.
- d. Store idle floor scrubbers out of the reach of children and do not allow persons unfamiliar with the floor scrubber or these instructions to operate the floor scrubber.
- e. Maintain floor scrubbers and accessories. Check for misalignment or binding of moving parts, breakage of parts, and any other condition that may affect the floor scrubber's operation. If damaged, have the floor scrubber repaired before use. Accidents may be caused by poorly maintained floor scrubbers.
- f. Only use the floor scrubber and accessories in accordance with these instructions. Always take into account the working conditions and the work to be performed. Use of the floor scrubber for unintended functions could result in hazardous situations.
- g. Keep handles and grasping surfaces dry, clean, and free from oil and grease. Slippery handles and grasping surfaces do not allow for safe handling and control of the tool in unexpected situations.

5. SERVICE

- a. Have your floor scrubber serviced by a qualified repair person using only identical replacement parts. This will ensure that the safety of the floor scrubber is maintained.

Specific Safety Rules

- For your safety, do not turn on your floor scrubber or try to use it until it is completely assembled according to these instructions, and until you have completely read and understood this user manual.
- Always keep hands out of the path of the floor scrubber. Avoid awkward hand positions where a sudden slip could cause your hand to move into the floor scrubber.
- Make sure there are no nails or foreign objects in the area that is being cleaned.
- Protect your eyes. Always wear safety goggles while machine is in use to avoid potential eye damage.
- Everyday glasses only have impact-resistant lenses and ARE NOT safety glasses. For your own protection, make sure your safety glasses or goggles comply with the ANSI Z87.1 Safety Standard.
- Never use this floor scrubber without the provided GFCI.
- Always verify that the GFCI is working correctly before starting work.
- Replacement of the plug or the power cord shall always be carried out by the manufacturer or a designated service organization.
- Keep liquid clear of the parts of the scrubber and away from persons in the working area.

Technical Specifications

Description	Data
Protection Level	3 IPX
Operating Voltage	12 V
Suction Motor	220 W
Suction Vacuum	600 mm / H ₂ O
Brush Motor	250 W
Brush Speed	140 rpm
Solution Tank Capacity	3.1 Gallon
Recovery Tank Capacity	3.4 Gallon
Squeegee Width	18.5 inch
Theoretical Working Efficiency	16,000 sq. ft. / hr
Brush Diameter	14 inch
Cleaning Width	13.8 inch
Brush Pressure	25 kg.f
Maximum Gradient	2%
Minimum Turning Radius	23.6 inches
Machine Dimension	16.5 x 16.1 x 35.4 inches

Installation Instructions

ASSEMBLING THE SQUEEGEE

- Use two star nuts to attach squeegee assembly to revolving shaft.

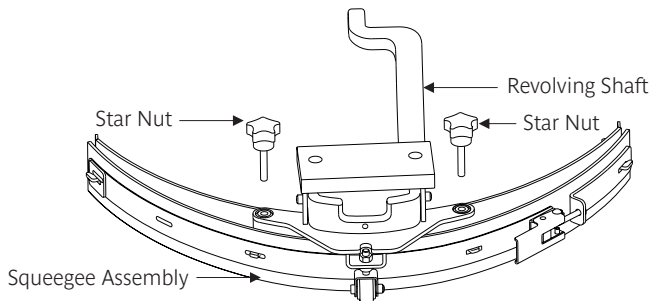


Fig. 1




Fig. 2

ASSEMBLING THE BRUSH / PAD DRIVER

- Make sure that the scrubber is turned off.
- Adjust the handle to the full upright position.
- Lay machine on the floor with the bottom of the scrubber exposed.
- Align clutch plate with brush / pad driver and rotate 30 degrees to the left.
- To remove, rotate 30 degrees to the right.

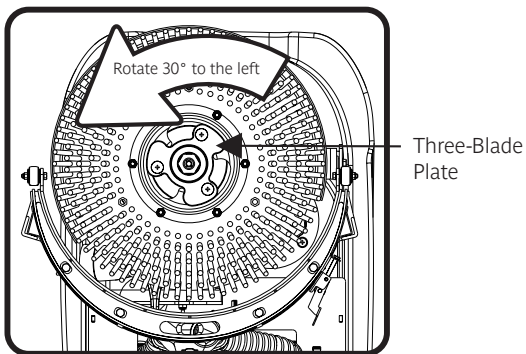


Fig. 3

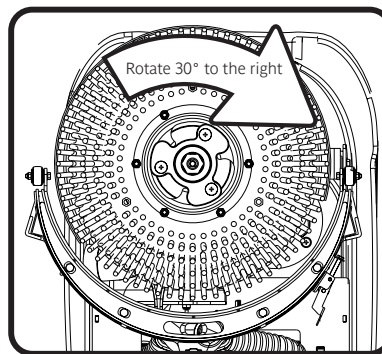


Fig. 4

ASSEMBLING THE BATTERY

- Connect external battery connector labeled "Charger Connection" to the battery connector mounted to the scrubber.



Operation & Maintenance

WARNING: Be sure to read and understand this manual in its entirety before operation. Failure to do so may result in damage or injury.

PROPER SETUP AND PREPARATION


Ensure that all components are assembled tightly and secured and that the power source matches the voltage of your unit.

WARNING: Do not operate this unit near flammable or combustible objects.

For Scrubbing or Polishing:

PREPARATION


- Remove debris and any obstructions from cleaning surface before operation.
- Adjust handle to a comfortable position.
- Both hands should always be on the unit when in use.
- Fill solution tank with water or diluted detergent with a maximum temperature of 122°F.
- To extend machine life, use detergents with a neutral pH and low foam.

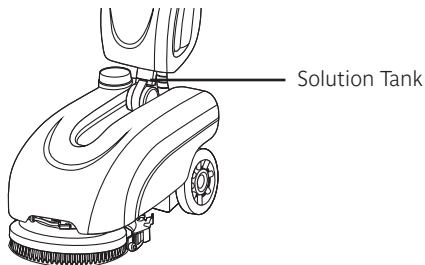

- Check that the brush / pad driver is properly attached to the scrubber.
- Confirm that the squeegee assembly is properly attached and moving freely with the scrubber.

OPERATION

- Insert machine key and turn.
- Press the power button on the scrubber.
- Press the water button to activate the dispensing pump.
- Press the vacuum switch to activate the vacuum.
- Push squeegee lever down till squeegee is contacting the floor.
- Hold both brush motor switches in the handle to activate the motor.
- Walk slowly when cleaning and pay attention to potential obstacles.

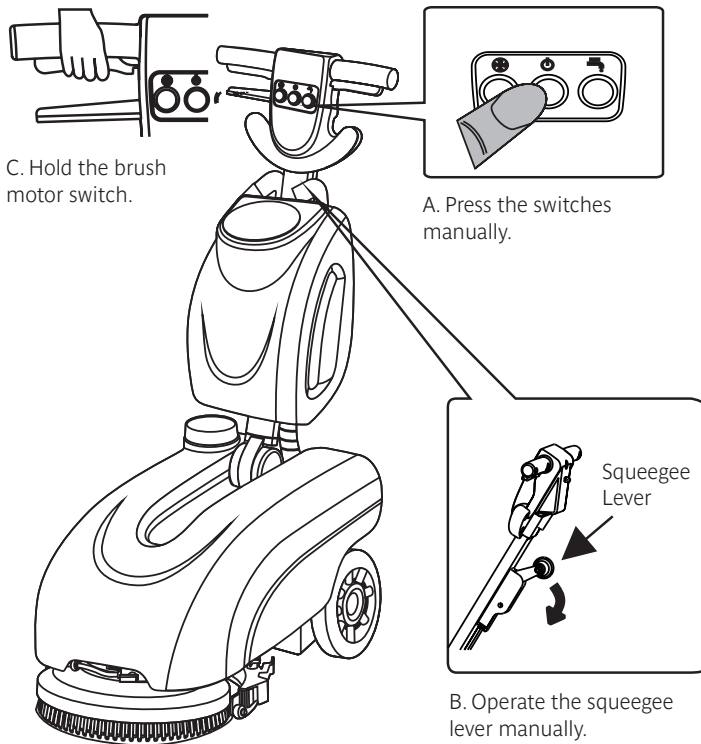

TO EMPTY WASTE WATER TANK

- Remove vacuum and drain hose from recovery tank housing.
- Lift waste water tank from scrubber frame.
- Pour waste water tank contents into appropriate sink or drain.
- Rinse waste water tank with clean water.
- Allow waste water tank to air dry.
- Place tank back on scrubber.
- Fasten vacuum hose and drain hose lids to waste water tank.


TO CHARGE THE BATTERY

- Plug included charging unit into appropriate 120-volt outlet.
- Plug the other end of the charging unit into the machine charging connection marked "Charging Connection."

MAINTENANCE


To control the amount of water dispensed by the machine:

- Adjust water dispensing by using the ball valve on the front of the machine above the brush assembly.

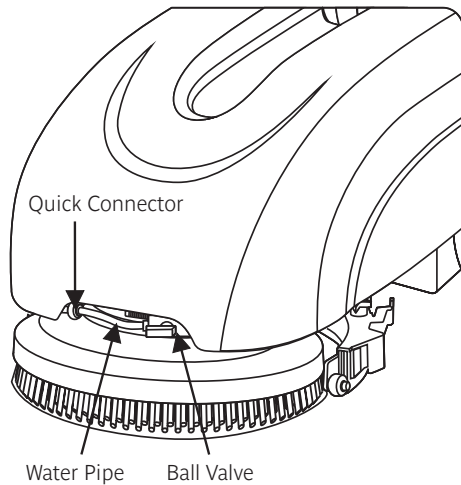

To replace or rotate squeegee:

- Rotate star nuts counterclockwise to remove assembly from shaft.
- Remove seven hexagon screws to take out the front squeegee and metal retaining strip.
- Release squeegee clasp to loosen the rear squeegee assembly.
- Remove the rear squeegee.
- Check wear of squeegee and replace if needed. Squeegees have four sides and can be rotated before replacing.

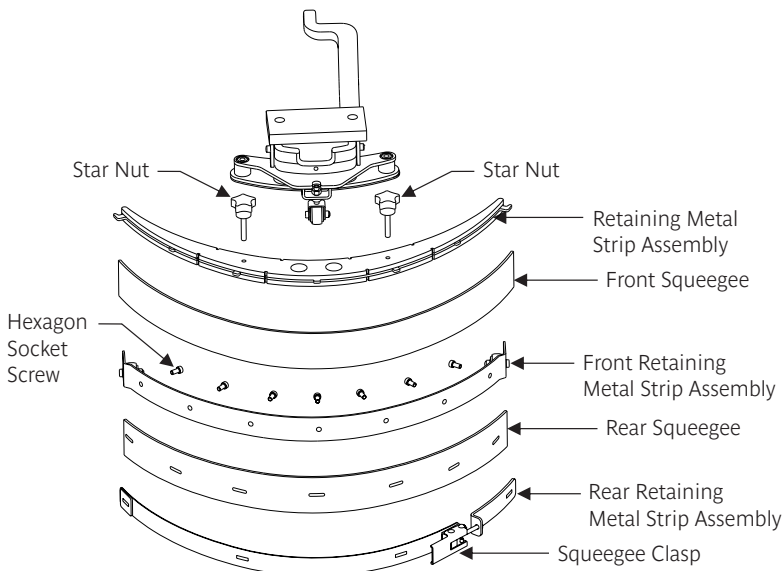


Safety Information

Failure to follow the instructions below could lead to damage or personal injury.

1. This unit is for commercial janitorial use only. You must be trained before operating unit.
2. Do not operate unit unless it is completely assembled and you have ensured that every component is secured tightly.
3. Ensure that the unit is dry before performing maintenance or repairs.
4. Ensure that the unit is kept dry at all times during operation. Store unit in a dry area, and only perform cleaning with a dry cloth.
5. Do not use unit near flammable objects, liquids, or vapors. Do not use flammable compounds to clean the unit.
6. Maintenance is to be performed by qualified professionals only.

Component Structure

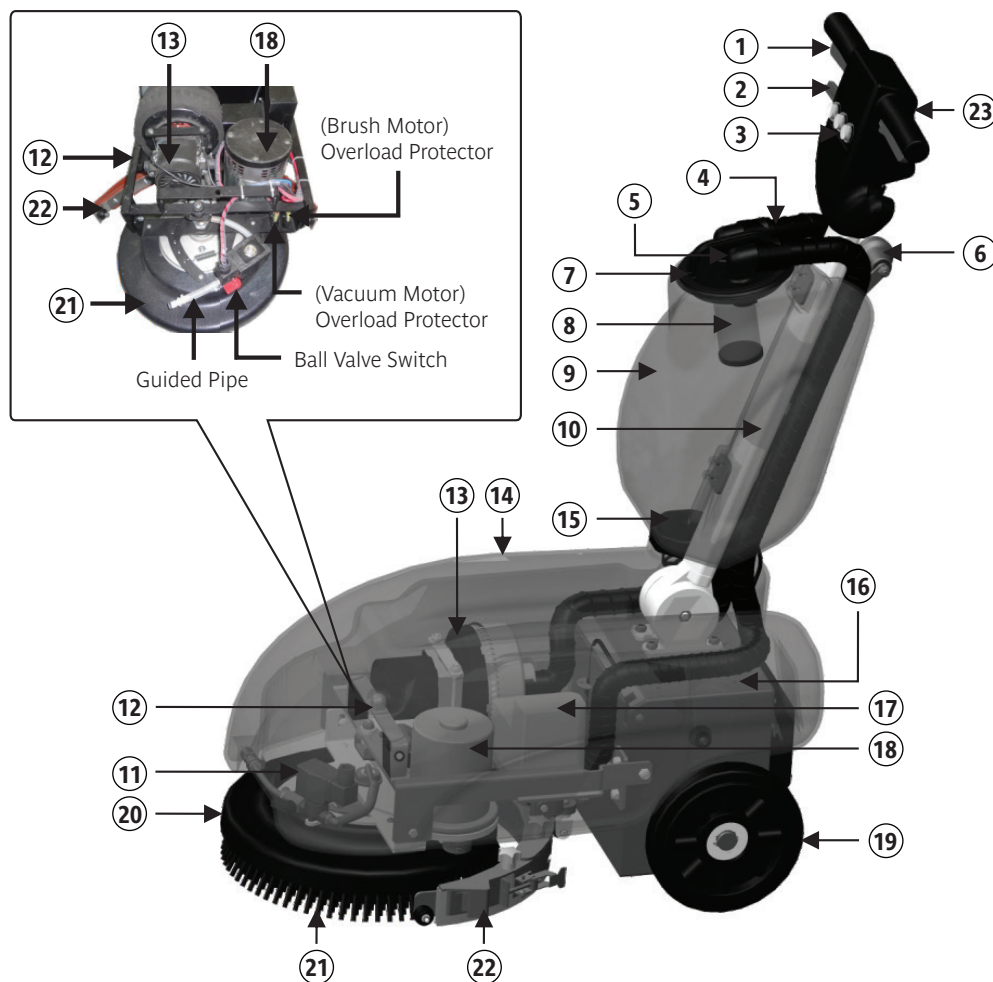

- | | | |
|----------------------------|------------------------------|---------------------|
| ① Brush Motor Switch | ⑨ Recovery Tank | ⑬ Circuit Board |
| ② Handle Adjustment Switch | ⑩ Handle Adjustment Assembly | ⑭ Brush Motor |
| ③ Control Panel | ⑪ Solenoid Valve | ⑮ Wheel |
| ④ Vacuum Hose | ⑫ Solution Tank Frame | ⑯ Brush Cover |
| ⑤ Suction Hose | ⑬ Suction Motor | ⑰ Brush |
| ⑥ Squeegee Lever | ⑭ Solution Tank | ⑱ Squeegee Assembly |
| ⑦ Recovery Tank Lid | ⑮ Solution Tank Lid | |
| ⑧ Float Net | ⑯ Battery Cover | |

Brush Assembly Diagram

