



SELECTING GASOLINE

If you want to start your generator using gasoline, follow steps 1-3, then continue with the remaining steps 4-8 below.


Step 1: Turn the fuel choice knob to GAS.

Step 2: Check the generator for gasoline. Add as needed.



OR

Step 3: Replace & secure gas cap.





SELECTING PROPANE

If you want to start your generator using propane, follow steps 1-3, then continue with the remaining steps 4-8 below.


Step 1: Turn the fuel choice knob to LPG.

Step 2: Connect the propane line to the quick connect on the front of the generator.



OR

Step 3: Connect the propane line to the propane tank.





SELECTING NATURAL GAS


If you want to start your generator using natural gas, follow steps 1-3, then continue with the remaining steps 4-8 below.

Step 1: Turn the fuel choice knob to NG.

Step 2: Connect the gray gas line to the quick connect on the front of the generator.




Step 3: Connect the gray gas line to the house quick connect and turn the gas on.




CONTINUE STARTUP STEPS WITH EITHER FUEL


Step 4: Switch the main breaker to OFF.




Step 5: Switch the idle control switch to OFF.



Step 6: Turn start up switch to ON.



Step 7: Press the start button or use the remote control to start the generator.

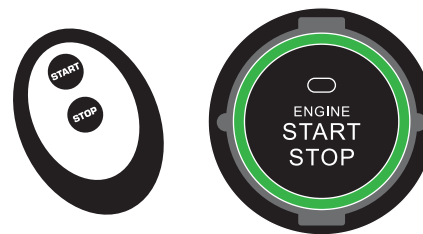

Step 8: Once the generator is running, turn the main breaker to ON and plug devices in.

