

ASSEMBLY INSTRUCTIONS MIXER TABLE ML-141060 FOR HL120 or HL200 MIXERS

These instructions describe the assembly of the mixer table and list the parts needed.

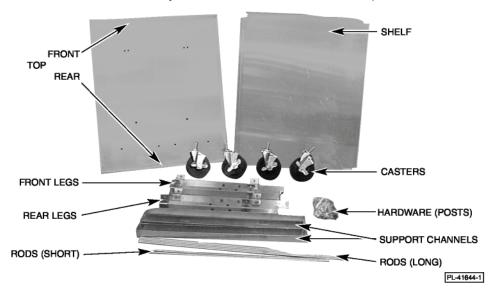

Description	Qty.	Description	Qty.	Description	Qty.
Тор	1	Washer	22	Shelf	1
Support Channel	3	Nut	22	Caster	4
Leg, Rear	2	Grommet	12	Post	4
Leg, Front	2	Rod (short)	2	Screw	8
Screw	22	Rod (long)	4	Lockwasher	8
Shoulder Bolt	2	Nut (3/8)	2	Washer (3/8)	4

- 1. Remove all protective film from top and shelf.
- 2. Lay top on flat surface with underside up. Install the three support channels; match up holes in support channels to holes in underside of top, with six $^{1}/_{4}$ -20 x $^{1}/_{2}$ screws, washers and nuts.

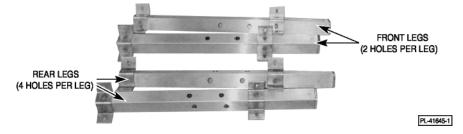

3. Loosely attach three legs, two rear and one front, to the underside of top with six $^{1}/_{4}$ -20 x $^{1}/_{2}$ screws, washers and nuts.



FORM 45211 (August 2011)
www.hobartcorp.com © HOBART 2011


MIXER TABLE ML-141060 (cont.)

- 4. Install casters into bottom of legs.
- 5. Install 12 grommets into holes in legs.
- Install rods (longer on sides, shorter on rear) into loosely installed legs. Lubricate rod ends with dish soap to make installation easier. Tighten all screws.
- 7. Install shelf onto three leg brackets with (6) $^{1}/_{4}$ -20 x $^{1}/_{2}$ screws, washers and nuts.
- 8. Install rods into remaining leg.
- 9. Attach leg onto shelf and underside of top using (4) 1/4-20 x 1/2 screws, washers and nuts.
- 10. Place table on its side and install four posts to top at rear of top with (4) $^{3}/_{8}$ -16 x $^{3}/_{4}$ screws and lockwashers.



- 11. Turn table upright.
- 12. Use $\frac{3}{8}$ -16 x $\frac{3}{4}$ screws and $\frac{3}{8}$ lockwashers to bolt mixer to the table.
- 13. If tray support is purchased, assemble shoulder bolts into $^3/_8$ holes on right side. Attach with $^3/_8$ washers and $^3/_8$ nuts. Hang tray sideways by the corners.

NOTICE All components must be assembled prior to use.

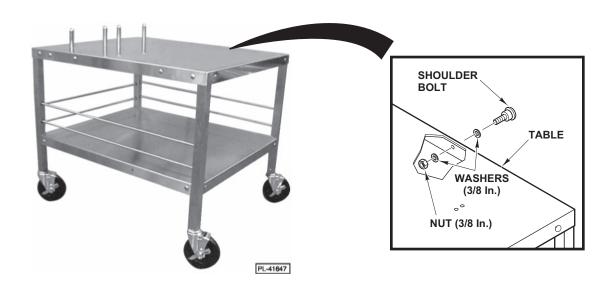

FORM 45211 (August 2011) PRINTED IN U.S.A.