

# Zeta Plus™ MH Series

## Dual Zone Depth Filter Cartridges & Capsules

Zeta Plus™ MH Series are a family of advanced, dual zone depth filters designed to provide optimal clarification and prefiltration in Food & Beverage applications. The Zeta Plus MH Series filter design consists of two distinct layers, or “zones” of filter media with the upstream zone more open than the downstream zone. This structure enhances the contaminant holding capacity of the filter media, since larger particles are trapped in the upper zone of the filter media and smaller particles are trapped in the lower zone, reducing premature plugging and extending service life. The two filter zones can be independently selected and combined to optimize performance.

### Superior Particle Removal

Zeta Plus MH Series filter medium offers unique advantages in contaminant removal by combining mechanical entrapment with electrokinetic adsorption. Larger particulate and hazes are mechanically entrapped in the depth of the media, while negatively charged particles, such as bacteria, yeast, and submicronic hazes, are adsorbed to the positively charged Zeta Plus MH Series filter media.

## Features & Benefits

### Zeta Plus™ MH Series dual-zone filter media construction

- Higher throughput, lower processing costs, smaller filter assemblies.
- Potential to condense two stages of filtration into one.

### Wide range of upstream/downstream combinations

- Customizable to meet product needs.

### High tensile strength media


- Withstands the rigors of hot water, steam, and chemicals for longer service life.

### Full range of cartridge and capsule configurations

- Scalable from laboratory to full production.

### Totally enclosed system

- Eliminates leakage and external contamination common with filter sheets.

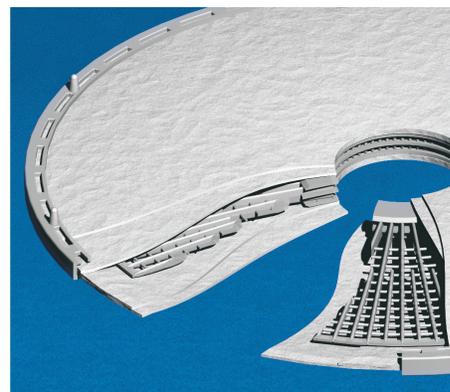

## Applications

The Zeta Plus™ MH series is ideally suited for clarification and prefiltration in food and beverage, cosmetic, and general applications where the exceptional high wet-tensile strength media, combined with the innovative dual-zone design, provides extended service life. These include aqueous, alcoholic, proteinaceous, and acidic solutions.

- Beer
- Wine
- Spirits
- Syrups
- Edible Oils
- Flavor Concentrates
- High Fructose Corn Syrup
- Nutraceuticals

# Zeta Plus™ MH Series Dual Zone Depth Filter Cartridges & Capsules

## Chemical Compatibility

Compatibility with various chemicals is indicated in the table at left. It is recommended that Zeta Plus™ MH Series filter media be tested in the product under standard process conditions to confirm compatibility prior to use. All tests have been carried out at ambient temperature (20°C) unless otherwise indicated.

## Cartridge Construction

Zeta Plus MH Series cartridges are designed for use with Zeta Plus sanitary style stainless steel filter housings. Cartridges are constructed from individual cells of Zeta Plus MH Series filter medium assembled together with polypropylene separators under predetermined compression and unitized by three, 316 stainless steel bands. Each cell is constructed using polypropylene molded edge seals and separators for high performance. Various gasket materials are available depending upon the application. Filter cartridges are available in 12, and 16-inch diameters, with surface area ranging from 9.2 ft<sup>2</sup> to 42.2 ft<sup>2</sup> per cartridge. All components are listed in 21CFR as safe for food contact.

## Flow Rates

The graphs below display flow rates obtained with 20°C clean water. Optimum flow rates vary by application, but in general, the flow rate per unit area (flux) should not exceed 0.25 gpm/ft<sup>2</sup> (10 lpm/m<sup>2</sup>) of filter media in beer and 0.5 gpm/ft<sup>2</sup> (20 lpm/m<sup>2</sup>) in wine or similar beverage for best performance. Lower flux rates often result in longer service life, greater throughputs and superior system economics.

## Grade Selection

Zeta Plus MH Series filter media are available in four standard grade combinations. The chart below is provided as a guide to correct grade selection based on nominal retention ratings and can be used in conjunction with the recommendations in Table 1 to determine the appropriate filter grade for your application. Operating conditions and the fluid being filtered impact retention performance. Small-scale pilot runs with Zeta Plus BC capsule filters can be performed to confirm grade selection prior to scale-up. 3M Purification's Application Engineering staff can assist in grade selection as well as assist with on-site evaluations. Filter system optimization can also be conducted at 3M Purification's laboratory facilities.

Table 3 references the nominal effective filtration area of Zeta Plus MH Series capsules and cartridges. For scale-up evaluations, it is strongly recommended that customers contact 3M Purification's Application Engineers for assistance.

**Table 1: Application Recommendations**


Application	Recommended Grades
Rough clarification (particles, haze)	10MH02
Rough clarification (yeast, haze)	30MH03
Polishing clarification/membrane prefiltration (yeast, haze, bacteria)	60MH03, 60MH05

Table 1 is intended as a guide. Grade selection and performance should be confirmed with small-scale pilot trials.


Product	Compatibility
Acetic Acid up to 20%	Satisfactory
Ethanol up to 98%	Satisfactory
Hypochlorite	Not recommended
Hydrogen Peroxide*	Satisfactory
Nitric Acid	Not recommended
Peracetic Acid*	Satisfactory
Sodium Hydroxide 2%	Not recommended
Sugar solution 10%	Satisfactory
Water up to 90°C	Satisfactory

\*As found in commonly used sanitizing agents. Contact your local 3M Purification Inc. representative for advice on maximum recommended concentration.


## Flow vs. Differential Pressure

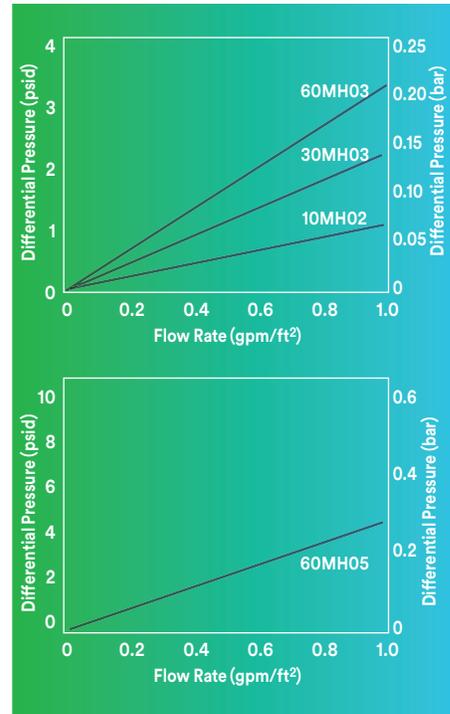

**Figure 4: Nominal Retention Ratings**

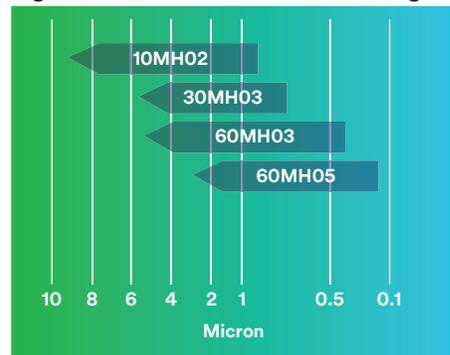

## Zeta Plus™ MH Series Dual Zone Depth Filter Cartridges & Capsules

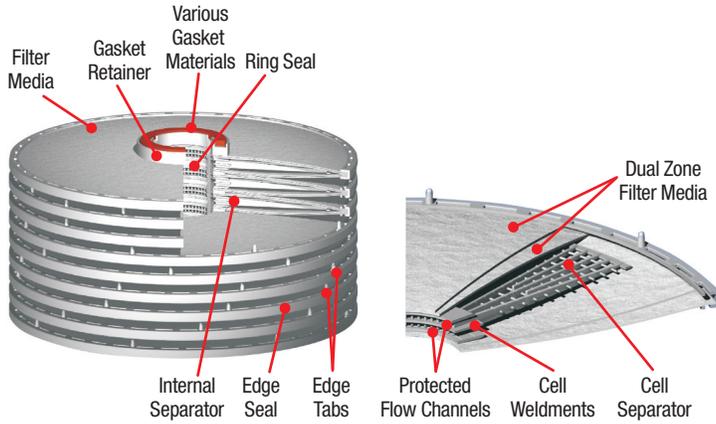

3M Purification Inc.'s unique dual zone filter media and cell separator ensure fast flow rates, lower pressure drops, and greater throughputs.

**Table 2: Recommended Operating Parameters**

Maximum Temperature	176°F (80°C)
Hot Water Sanitization	194°F (90°C)
Change-out Differential Pressure	35 psid (2.4 bar)
Recommended Flow Rate*	0.25 - 0.5 gpm/ft. <sup>2</sup> (10 - 20 lpm/m <sup>2</sup> )
Maximum Flow Rate	1.0 gpm/ft. <sup>2</sup> (40 lpm/m <sup>2</sup> )
Rinse Volume	1.25 gallons/ft. <sup>2</sup> (50 liters/m <sup>2</sup> )

\*Consult 3M Purification Inc. for the best flow rate for your application.

**Table 3: Nominal Effective Filtration Area**

Cartridge Configuration	Surface Area
BC0025 (Single Filter)	3.7 in. <sup>2</sup> (24 cm <sup>2</sup> )
45244 (12" diameter, 9-cell)	9.2 ft. <sup>2</sup> (0.90 m <sup>2</sup> )
45245 (12" diameter, 16-cell)	16.4 ft. <sup>2</sup> (1.5 m <sup>2</sup> )
Z16P (16" diameter, 14-cell)	34.7 ft. <sup>2</sup> (3.2 m <sup>2</sup> )

### Sanitary Filter Housings

3M Purification Inc. provides a wide array of standard and custom designed sanitary filter housings to accommodate Zeta Plus™ MH Series filter cartridges. All housings are designed with the food and beverage industries in mind and feature 316L mirror-polished surfaces and easy-to-clean components.



Zeta Plus™ BC capsule filters are ideal for pilot scale and low volume applications.

# Zeta Plus™ MH Series Ordering Guide

## BC Capsules

Cartridge Number	Grade
BC0025S (Sanitary)	10MH02
	30MH03
	60MH03
	60MH05

## 12" Diameter Cartridges

Cartridge Number	Geometric Variation	Gasket Material	Grade
45244 (12" 9-cell)	01 - Standard polypropylene	A - Silicone D - Nitrile	10MH02
45245 (12" 16-cell)			30MH03
			60MH03
			60MH05

## 16" Diameter Cartridges

Cartridge Number	Gasket Material	Grade
Z16P (16" 14-cell)	A - Silicone D - Nitrile	10MH02
		30MH03
		60MH03
		60MH05

**PLEASE NOTE: The Order Guide above is for reference only. Not all combinations are available.**

**Please consult with your 3M representative to determine the appropriate part number for your application.**

Technical Information
The technical information, guidance, and other statements contained in this document or otherwise provided by 3M are based upon records, tests, or experience that 3M believes to be reliable, but the accuracy, completeness, and representative nature of such information is not guaranteed. Such information is intended for people with knowledge and technical skills sufficient to assess and apply their own informed judgment to the information. No license under any 3M or third party intellectual property rights is granted or implied with this information.
Product Selection and Use
Many factors beyond 3M's control and uniquely within user's knowledge and control can affect the use and performance of a 3M product in a particular application. As a result, customer is solely responsible for evaluating the product and determining whether it is appropriate and suitable for customer's application, including conducting a workplace hazard assessment and reviewing all applicable regulations and standards (e.g., OSHA, ANSI, etc.). Failure to properly evaluate, select, and use a 3M product and appropriate safety products, or to meet all applicable safety regulations, may result in injury, sickness, death, and/or harm to property.
Warranty, Limited Remedy, and Disclaimer
Unless a different warranty is specifically stated on the applicable 3M product packaging or product literature (in which case such warranty governs), 3M warrants that each 3M product meets the applicable 3M product specification at the time 3M ships the product. 3M MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR ARISING OUT OF A COURSE OF DEALING, CUSTOM, OR USAGE OF TRADE. If a 3M product does not conform to this warranty, then the sole and exclusive remedy is, at 3M's option, replacement of the 3M product or refund of the purchase price.
Limitation of Liability
Except for the limited remedy stated above, and except to the extent prohibited by law, 3M will not be liable for any loss or damage arising from or related to the 3M product, whether direct, indirect, special, incidental, or consequential (including, but not limited to, lost profits or business opportunity), regardless of the legal or equitable theory asserted, including, but not limited to, warranty, contract, negligence, or strict liability.



**3M Purification Inc.**  
**3M Separation and Purification Sciences Division**  
 400 Research Parkway  
 Meriden, CT 06450 USA  
 Phone 1-800-243-6894  
 1-203-237-5541  
 Fax 1-203-630-4530  
 Web www.3Mpurification.com

Your local distributor:

Zeta Plus is a trademark of 3M Company.  
 All other trademarks are the property of their respective owners.  
 © 2018 3M Company. All rights reserved.  
 70020188564 REV 0318sr