STEP 1

Remove all contents from carton.

(NOTE: Check for concealed damage - Notify Carrier of any damages immediately)

STEP 2


• Position sink (upside down) onto counter top surface at desired location. Trace outer edge of Self-Rim with pencil.

(NOTE: Ensure sink is parallel to counter edges. Procedure does not apply to DI-1-30, DI-1-5SP or DI-1-10SP. Refer to chart for Cut Out dimensions.)



<< CORRECT MARKING **PROCEDURE**

Pencil MUST be held straight as possible.





• Remove sink and draw a second line 3/8" parallel to the inside of the marked line - that will be the CUT line (As shown).

 NOTE: BEFORE CUTTING COUNTER TOP. REFER TO THE **CHART TO VERIFY CUTOUT DIMENSIONS!** REMEMBER:

MEASURE TWICE. CUT ONCE!

• Drill 1/4" hole 1 to the inside of cut line then use 1/2" drill bit to enlarge hole.


 Apply masking tape along outer (sink edge) line. This will prevent damaging countertop while cutting.

• Position jig saw blade into 1/2" hole and follow CUT LINE.

STEP 3

• Install Drain -Apply a bead of Plumber's Putty as shown.

Plumber's Putty.

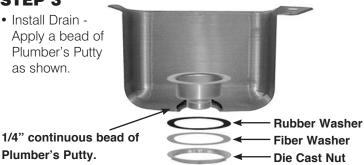


STEP 4 • Install Faucet (as shown). Fauce Removable Aerator Plastic Gasket Metal Washer Lock Nut Supply Line


STEP 5

• Remove masking tape from counter surface and position sink into opening to ensure proper fit.









• Slide clip into end of Roll Form track (As Shown) and position where desired and hand tighten. Once all clips are in position, tighten with screwdriver -

DO NOT OVERTIGHTEN!

• Wipe excess Silicone from counter surface.

STEP 7

Connect Drain and Faucet supply lines.



EDGEWOOD, NY 11717-8380

© ADVANCE TABCO, MARCH 2016







CHECK FOR CONCEALED DAMAGE FILE CLAIM WITH FREIGHT CARRIER

Drop-ins manufactured by **ADVANCE TABCO** are designed and constructed for countertop installations. Only one compartment units intended for HAND SINK USE are NSF listed and approved. Suggested end use for drop-in sinks include dump sinks, bar sinks, wash sinks and hand sinks.

This Carton Contains:

1 ea. Sink Bowl
Basket Type Drain (sub assembly)
(see chart).
Faucet (sub assembly) (see chart).
Mounting Clips (see chart).

TOOLS REQUIRED:

- Drill Motor
- 1/4" 1/2" Drill Bits
- Long Shank Screw Driver
- Ruler or Tape Measure
- Pencil
- Adjustable Wrenches (2)
- Pipe Wrench
- Saber Saw or Jig Saw

MATERIAL REQUIRED:

- Silicone Sealant
- Plumbers Putty
- Masking Tape

RECOMMENDED SAFETY MATERIALS:

- Safety Glasses
- Work Gloves

NOTE:

The corners of ALL Cutouts are to have a **1-1/4**" Radius.



WIDTH IS FRONT TO BACK LENGTH IS LEFT TO RIGHT **Cutout Size** MODEL # LxWxD 1 1/4" Radius DI-1-5 10 x 14 x 5 13 x 19 12 1/4 x 18 1/4 DI-1-5SP 10 x 14 x 5 13 x 19 12 1/4 x 18 1/4 13 lbs. 9 x 9 x 3 12 x 14 11 1/4 x 13 1/4 †† DI-1-9 8 lbs 10 x 14 x 10 DI-1-10 13 x 19 12 1/4 x 18 1/4 11 lbs. **DI-1-10SP** 10 x 14 x 10 12 1/4 x 18 1/4 18 lbs. 13 x 19 **DI-1-1515** | 12-1/4 x 10-1/4 X 6 | 15 x 15 14 1/4 x 14 1/4 8 11 lbs 11 1/4 x 13 1/4 9 x 9 x 5 12 x 14 8 lbs. DI-1-25 DI-1-30 14 x 10 x 5 15 x 14 1/4 4 11 lbs. 16 x 15 16 1/4 x 14 1/4 DI-1-35 14 x 10 x 5 17 x 15 8 8 lbs 18 1/4 x 18 1/4 15 lbs DI-1-168 16 x 14 x 8 19 x 19 12 12 29 lbs * **DI-1-208** 20 x 16 x 8 23 x 21 22 1/4 x 20 1/4 25 lbs 22 1/4 x 20 1/4 12 23 x 21 * **DI-1-2812** 28 x 20 x 12 30 1/4 x 24 1/4 12 42 lbs. 31 x 25 24 3/4 x 18 1/4 2 12 20 lbs. * DI-2-10 10 x 14 x 10 25 1/2 x 19 * **DI-2-1410** 14 x 16 x 10 33 1/2 x 21 32 3/4 x 20 1/4 2 12 33 lbs. * **DI-2-2012** 20 x 16 x 12 45 1/2 x 21 44 3/4 x 20 1/4 2 16 40 lbs. * DI-2-208 20 x 16 x 8 45 1/2 x 21 44 3/4 x 20 1/4 2 16 29 lbs. 3 32 lbs. * DI-3-10 10 x 14 x 10 38 x 19 37 1/4 x 18 1/4 16

ABOVE SINKS SUPPLIED WITH K-52 GOOSENECK FAUCET UNLESS NOTED.

†† SUPPLIED WITH WATER FILLER FAUCET & GRATING

*SUPPLIED WITH K-50 FAUCET

**SUPPLIED WITH K-53 FAUCET WITH 12" SPOUT

49 1/4 x 20 1/4

55 1/4 x 24 1/4

2 3 16

2

52 lbs.

60 lbs.

50 x 21

56 x 25

* **DI-3-1410** 16 x 14 x 10

* **DI-3-1612** | 16 x 20 x 12







SMART SERIES"

LENGTH IS LEFT TO RIGHT

WIDTH IS FRONT TO BACK

MODEL #	Bowl Dim. L x W x D	Overall Dim. L x W	Cutout Size 1 1/4" Radius	* 4 201	cets # Drai	its # Clips	Ship Wt.	
SS-1-1715-7	14 x 10 x 7 1/2	17 x 15	16 1/4 x 14 1/4	1	1	8	12	
SS-1-1715-10	14 x 10 x 10	17 x 15	16 1/4 x 14 1/4	1	1	8	14	
SS-1-1919-7	16 x 14 x 7 1/2	19 x 19	18 1/4 x 18 1/4	1	1	12	16	
SS-1-1919-10	16 x 14 x 10	19 x 19	18 1/4 x 18 1/4	1	1	12	18	
SS-1-1919-12	16 x 14 x 12	19 x 19	18 1/4 x 18 1/4	1	1	12	20	
SS-1-2321-7	20 x 16 x 7 1/2	23 x 21	22 1/4 x 20 1/4	1	1	12	20	
SS-1-2321-10	20 x 16 x 10	23 x 21	22 1/4 x 20 1/4	1	1	12	22	
SS-1-2321-12	20 x 16 x 12	23 x 21	22 1/4 x 20 1/4	1	1	12	25	
SS-2-3321-7	14 x 16 x 7 1/2	33 1/2 x 21	32 3/4 x 20 1/4	1	2	12	33	
SS-2-3321-10	14 x 16 x 10	33 1/2 x 21	32 3/4 x 20 1/4	1	2	12	35	
SS-2-3321-12	14 x 16 x 12	33 1/2 x 21	32 3/4 x 20 1/4	1	2	12	37	
SS-2-4521-7	20 x 16 x 7 1/2	45 1/2 x 21	44 3/4 x 20 1/4	1	2	12	38	
SS-2-4521-10	20 x 16 x 10	45 1/2 x 21	44 3/4 x 20 1/4	1	2	12	39	
SS-2-4521-12	20 x 16 x 12	45 1/2 x 21	44 3/4 x 20 1/4	1	2	16	40	

FAUCETS OPTIONAL

U Channel Installation



Bubbler Optiona

SMART SERIES™ For the Classroom

LENGTH IS LEFT TO RIGHT

WIDTH IS FRONT TO BACK

MODEL #	Bowl Dim. L x W	O.A. Dim. L x W	Cutout Size 1 1/4" Radius	Fauc Left	et Holes Right	*Ciigs	Ship Weight
SCH-2317	16 x 14 x 7 1/2	23 x 17	22 1/4 x 16 1/4	1	1	8	16
SCH-1-2517L	16 x 14 x 7 1/2	25 x 17	24 1/4 x 16 1/4	3	1	12	18
SCH-1-2517R	16 x 14 x 7 1/2	25 x 17	24 1/4 x 16 1/4	1	3	12	18

FAUCETS OPTIONAL