

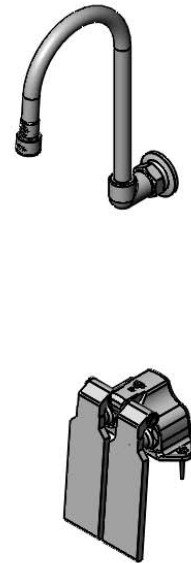


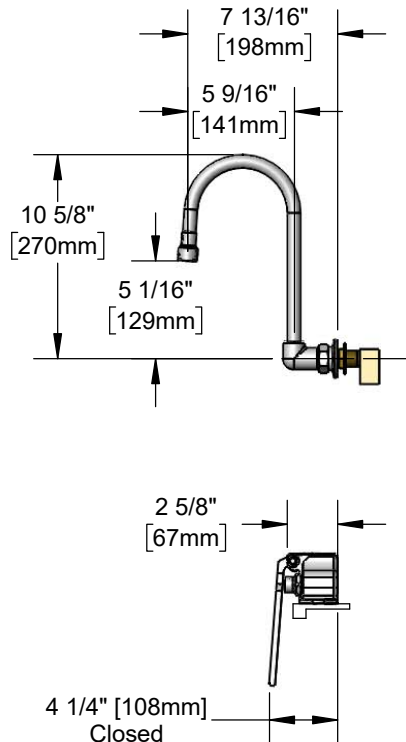

Architect/Engineering Specifications:

Ledge mounted double pedal valve, rigid dummy gooseneck, polished chrome plated brass body and gooseneck with 1.5 GPM vandal resistant laminar flow device, 1/2" NPT female inlet and adjustable wall flange. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372.

Job Name _____
 Model Specified _____ Quantity _____
 Variations Specified _____
 Date _____

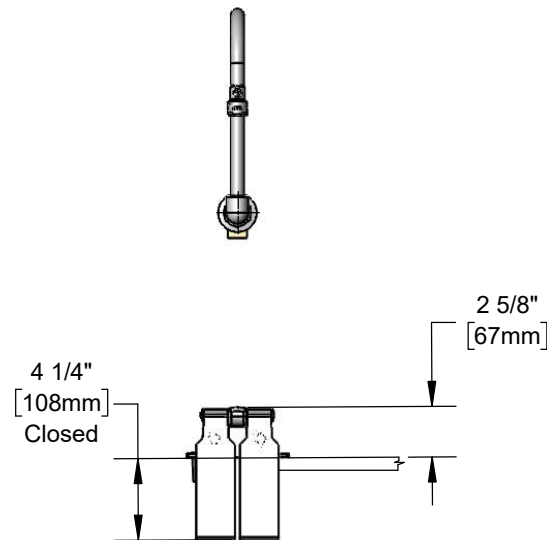

Features & Benefits:

- Ledge mounted double pedal valve w/ polished chrome plated brass body
- Wall mount rigid dummy gooseneck for remote locations
- 1.5 GPM vandal resistant laminar flow device (B-0199-29VR)
- 1/2" NPT female inlets and outlet
- Ø2" adjustable wall flange
- Material: Polished chrome plated brass elbow, pedal valve, tubular spout & aluminum knee pedals

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)

Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - 140 °F
- Flow Rate: 1.5 GPM @ 60 psi

Optional Outlets (Series 2 / VR Series 7)

GPM	Aerated	Non-Aerated (Laminar)	VR Aerated	VR Non-Aerated (VR Laminar)
0.35	N/A	☐ B-0199-02-N035	N/A	☐ B-0199-07-N035
0.5	N/A	☐ B-0199-02-N05	N/A	☐ B-0199-07-N05
1.0	☐ B-0199-02-F10	N/A	☐ B-0199-07-F10	N/A
1.2	☐ B-0199-02-F12	N/A	☐ B-0199-07-F12	N/A
1.5	☐ B-0199-02-WS	N/A	☐ B-0199-07-WS	N/A
2.2	☐ B-0199-02	N/A	☐ B-0199-07	N/A

