



BEVERAGE-AIR®



YOUR COMPLETE REFRIGERATION SOURCE

888-845-9800 | beverage-air.com | 2025 catalog



BEVERAGE-AIR®

Your Complete Refrigeration Source

Beverage-Air is a leading domestic manufacturer of commercial refrigeration solutions, with a vast product offering including over 1,000 unique models across 31 product series and 11 product categories. Manufactured in Brookville, Pennsylvania and headquartered in Winston-Salem, North Carolina, Beverage-Air is committed to producing American made equipment for the foodservice market.

Founded in 1944, Beverage-Air joined the Welbilt brand portfolio in 2024. Welbilt, Inc., an Ali Group company, was acquired in 2022 and provides award-winning brands to the North American market. Today, the Ali Group employs more than 14,500 people across 29 countries, operates 74 manufacturing facilities worldwide, and includes more than 110 brands. Often times, second and third generation employees work side by side to drive innovative thinking and quality manufacturing.

Our expansive product offering allows us to meet any operator's refrigeration need whether it be front of the house, back of the house, food preparation or point of sale merchandising. With seemingly unlimited customizable options, award winning design innovation and unparalleled customer commitment, Beverage-Air continues to be a trusted partner in the food service industry. Whether it's national accounts, high-end restaurants or small operations, Beverage-Air has a solution for any food service application.





Beverage-Air has a full range of premium refrigeration and food service equipment solutions to meet the diverse needs of restaurant, chain, retail, convenience store, educational, and healthcare settings.





BEVERAGE-AIR®

AFTERMARKET SERVICES

As a Beverage-Air customer, our commitment to you continues with the ongoing support of our aftermarket services. This program provides you access to a full range of support tools.

YOU HAVE ACCESS TO THE FOLLOWING:

- Ongoing technical support via telephone
- Product Customization
- Qualified parts distributor network
- Qualified network of reputable service technicians
- Service and maintenance dispatch
- Online manuals & parts breakdown
- Online warranty claims processing
(warranty at back of catalog)

CUSTOMER COMMITMENT

Committed to innovation, excellence, and customer satisfaction, Beverage-Air continually works to leverage efficiencies in manufacturing and distribution to benefit our customers.

WE COMMIT ALL OF THE FOLLOWING TO YOU:

- Industry-leading quality and customer satisfaction
- Award-winning product innovation
- Competitive pricing
- Factory Inventory
- Energy efficient products
- Complete aftermarket services

Factory Headquarters Sales Office

3779 Champion Blvd
Winston-Salem, NC 27105
Phone: (336) 245-6400
Fax: (336) 245-6453
Email: sales@bevair.com
Web: www.beverage-air.com

Warranty Service Dispatch

(877) 866-1223

Factory Technical Service

Phone: (800) 684-1199
Fax: (800) 262-9381

Factory Customer Service

Phone: (888) 845-9800
Fax: (800) 253-5168



TABLE OF CONTENTS

| | | | | | |
|--------------------------|-------------------|----|---------------------------------|------------------------------|-----|
| Top Mount Reach-Ins | | 4 | Food Prep Tables | | 80 |
| HR/HF | Horizon Series | 6 | SPE | Sandwich Prep Tables | 82 |
| PR/PF | P Series | 10 | DP | Pizza Prep Tables | 94 |
| CT | Cross Temp Series | 16 | SPE-S | Salad Bars | 98 |
| Bottom Mount Reach-Ins | | 22 | TPE | Topping Stations | 100 |
| RB/FB | Vista Series | 24 | Worktops & Undercounters | | 108 |
| HBR/HBF | Horizon Series | 28 | WTR/WTF | Worktops | 110 |
| RI | RI Series | 34 | UCR/UCF | Undercounters | 122 |
| Warming Cabinets | | 38 | Chef Bases | | 132 |
| HH | Horizon Series | 40 | WTRCS/WTFCS | Chef Bases | 134 |
| PH | P Series | 42 | WTCTCS | Cross Temp Chef Bases | 138 |
| Glass Door Merchandisers | | 48 | Bar & Wine Equipment | | 140 |
| MT | Marketeer Series | 50 | DD | Direct Draw | 142 |
| MM | MarketMax Series | 52 | BM/DZ | Bar Mobile | 146 |
| CF/CT | Countertop Units | 60 | BB | Back Bar | 148 |
| BDC | Dipping Cabinets | 62 | DW | Bottle Coolers | 158 |
| NC | Novelty Cases | 64 | GF/FLG | Glass & Plate Chiller | 160 |
| Open Air Merchandisers | | 68 | Milk Coolers | | 166 |
| BZ | Breeze Series | 70 | SM/SMF | Single Access | 169 |
| VM | VueMax | 72 | ST/STF | Dual Access | 170 |
| Deli Cases | | 76 | Blast Chillers / Shock Freezers | | 172 |
| CDR | Deli Cases | 78 | CF/RBS | Self Contained | 174 |
| | | | BF200 | Blast Chiller/Freezer/Thawer | 176 |
| | | | Beverage-Air | | |
| | | | | Warranty | 178 |
| | | | | Contacts/Directory | 180 |

©2025 Beverage-Air. All rights reserved. Beverage-Air®, Horizon®, Vista®, Cross Temp®, Marketeer®, MarketMax®, Breeze®, and VueMax® are trademarks of Beverage-Air. Beverage-Air cannot be held responsible for typographical or photographic errors. Photos of units in working environments may show custom or third-party modifications which may not be available from our factory. Beverage-Air, 3779 Champion Blvd, Winston-Salem, NC 27105



TOP MOUNT REACH-INS

DESIGNED TO EXCEED EXPECTATIONS IN TOUGH KITCHEN ENVIRONMENTS



Horizon Series



P Series



Cross Temp®

HORIZON[®] SERIES

Refrigerators & Freezers



**Designed to perform in
high ambient conditions**

**7 year warranty on parts,
labor, and compressor**

Made in USA



Heavy Duty Construction

2" CFC and HCFC-free foamed-in place
polyurethane insulation

Full electronic Control

with one-touch defrost

Multiple finish options

Door locks standard

Solid doors only (optional on glass door models)

Field-reversible doors

Solid doors only

Cam-lift hinges

with 120 degree stay open feature

**Sealed system makes service
and maintenance quick and easy**

LED lighting standard

Back rack airflow distribution system

Self-closing doors


6" heavy duty casters standard

3" casters or 6" leg option available
at no charge when specified on order

**Environmentally friendly,
energy efficient R290 refrigerant**

AVAILABLE DOORS

- Solid (*one full-door*)
- Half Solid (*two half-doors*)
- Glass (*one full-door*)
- Half Glass (*two half-doors*)

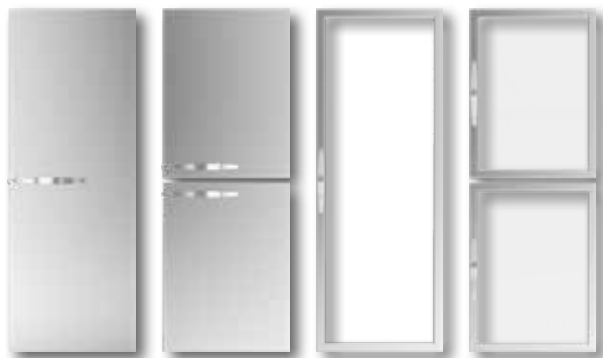

EXTERIOR FINISHES

- Stainless steel front with gray painted steel sides
- Stainless steel sides/front

INTERIOR FINISHES

- Corrosion resistant aluminum
- Stainless steel

AVAILABLE OPTIONS

- Left hinge doors
- Remote models available

AVAILABLE ACCESSORIES

- Tray Slides
- Additional shelves

MOUNTING OPTIONS

- 6" casters (standard)
- 6" legs
- 3" casters
- Flanged/seismic feet

AGENCY CERTIFICATIONS



BACK CHANNEL
to promote air flow



FIELD-REVERSIBLE DOORS
for flexibility to get your kitchen set up exactly how you want it

1, 2, AND 3 SECTION MODELS AVAILABLE



HORIZON® SERIES

REFRIGERATORS


MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DOOR TYPE | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET |
|-------------------|-----------|------------|-------------------|-------|-------|--------|-------|-----|------|---------------|
| 1 SECTION | HR1HC-1S | SOLID | 1/3 | 26 | 33.63 | 78.5 | 115 | 1/4 | 2.7 | 21.17 |
| | HR1HC-1HS | HALF SOLID | 2/3 | | | | | | | |
| | HR1HC-1G | GLASS | 1/3 | | | | 115 | 1/4 | 2.7 | 22.28 |
| | HR1HC-1HG | HALF GLASS | 2/3 | | | | | | | |
| 1 WIDE SECTION | HR1WHC-1S | SOLID | 1/3 | 35 | 33.63 | 78.5 | 115 | 1/4 | 2.7 | 30.76 |
| | HR1WHC-1G | GLASS | | | | | | | | |
| 2 SECTIONS | HR2HC-1S | SOLID | 2/6 | 52 | 33.63 | 78.5 | 115 | 1/3 | 6 | 46.88 |
| | HR2HC-1HS | HALF SOLID | 4/6 | | | | | | | |
| | HR2HC-1G | GLASS | 2/6 | | | | | | | |
| | HR2HC-1HG | HALF GLASS | 4/6 | | | | | | | |
| 3 SECTIONS | HR3HC-1S | SOLID | 3/9 | 78 | 33.63 | 78.5 | 115 | 1/3 | 6 | 71.52 |
| | HR3HC-1HS | HALF SOLID | 6/9 | | | | | | | |
| | HR3HC-1G | GLASS | 3/9 | | | | | | | |
| | HR3HC-1HG | HALF GLASS | 6/9 | | | | | | | |


Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

| FINISH OPTIONS REFRIGERATOR & FREEZER | | | |
|---------------------------------------|------------|---|------------------------------|
| SUFFIX | EXAMPLE | EXTERIOR | INTERIOR |
| (standard) | HR1HC-1S | Stainless steel front with gray painted steel sides | Corrosion resistant aluminum |
| P | HRP1HC-1S | Stainless steel front with stainless steel sides | Corrosion resistant aluminum |
| S | HRS1HC-1S | Stainless steel front with gray painted steel sides | Stainless steel |
| PS | HRPS1HC-1S | Stainless steel front with stainless steel sides | Stainless steel |

| AVAILABLE OPTIONS | |
|--|-------------------------|
| SUFFIX | |
| 18 | Left hinge doors |
| R | Remote models available |
| Append suffix to model # when placing order. Ex: HR2-1S-18 | |



Stainless steel



Gray painted steel



Left hinge door (-18)

FREEZERS


MAINTAINS PRODUCT TEMPERATURES OF -10°F.

| SECTIONS | MODEL # | DOOR TYPE | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET |
|-------------------|-----------|------------|-------------------|-------|-------|--------|-------|----------|------|---------------|
| 1 SECTION | HF1HC-1S | SOLID | 1/3 | 26 | 33.63 | 78.5 | 115 | 3/4 | 11 | 21.06 |
| | HF1HC-1HS | HALF SOLID | 2/3 | | | | | | | |
| | HF1HC-1G | GLASS | 1/3 | | | | | | | |
| | HF1HC-1HG | HALF GLASS | 2/3 | | | | | | | |
| 1 WIDE SECTION | HF1WHC-1S | SOLID | 1/3 | 35 | 33.63 | 78.5 | 115 | 3/4 | 11 | 30.76 |
| 2 SECTIONS | HF2HC-1S | SOLID | 2/6 | 52 | 33.63 | 78.5 | 115 | 3/4+ | 10 | 45.2 |
| | HF2HC-1HS | HALF SOLID | 4/6 | | | | | | | |
| | HF2HC-1G | GLASS | 2/6 | | | | 115 | 3/4 (X2) | 13.2 | |
| | HF2HC-1HG | HALF GLASS | 4/6 | | | | | | | |
| 3 SECTIONS | HF3HC-1S | SOLID | 3/9 | 78 | 33.63 | 78.5 | 115 | 3/4 (X2) | 13.2 | 69 |
| | HF3HC-1HS | HALF SOLID | 6/9 | | | | | | | |
| | HF3HC-1G | GLASS | 3/9 | | | | | | | |
| | HF3HC-1HG | HALF GLASS | 6/9 | | | | | | | |

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

ADAPTIVE DEFROST

- Reduces energy consumption up to 15%
- Units are able to provide a consistent product temperature throughout the cabinet even during defrost cycles
- Reduces the overall time defrosting versus traditional timed defrost
- Example: Adaptive Defrost: 48 min total in 4 cycles versus 60 min in 3 cycles (Traditional 8HR)
- High Ambient and Humidity testing shows the system's ability to perform better in high usage environments under unfavorable conditions

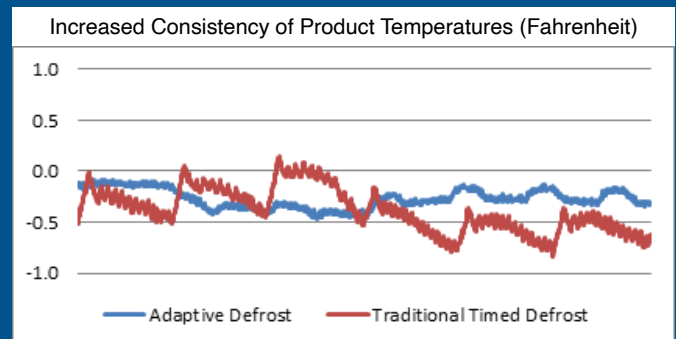

P SERIES

Spec Line Refrigeration



Maximum resistance to wear and tear with stainless steel breaker caps and door liners

Configurable interior gives ultimate flexibility for shelf and slide combinations

7 year warranty on parts, labor, and compressor

LED lighting

Full electronic control

Self-closing doors

with 120° stay-open feature, on cam-lift hinges

Expansion valve technology

Freezer only

Door locks standard

Solid and Glass doors

Magnetic gasket attached to each door

for positive seal

Sealed system makes service and maintenance quick and easy

6" adjustable legs

(3" casters or 6" caster option available at no charge when specified on order)

3 epoxy coated wire shelves

per section

Removable access panel

for ease of service and maintenance



AVAILABLE DOORS

- Solid (*one full-door*)
- Half Solid (*two half-doors*)
- Glass (*one full-door*)
- Half Glass (*two half-doors*)



EXTERIOR FINISHES

- Stainless steel

INTERIOR FINISHES

- Corrosion-resistant aluminum
- Stainless steel

AVAILABLE OPTIONS

- Left hinge doors
- Remote models available

AVAILABLE ACCESSORIES

- Additional shelves
- Tray slide kits (reach-in & pass-thru only)
- Stainless steel shelves
- Kick plate

MOUNTING OPTIONS

- 6" legs (standard)
- 6" casters
- 3" casters
- Flanged/seismic feet

AGENCY CERTIFICATIONS



TRAY SLIDES A AVAILABLE

holds one 18x26" or two 14x18"



TRAY SLIDES A/C AVAILABLE

hold one 18x26", or two 14x18", or two 12x20"

1, 2, AND 3 SECTION MODELS AVAILABLE IN REACH-IN, PASS-THRU, ROLL-IN AND ROLL-THRU



P SERIES

REFRIGERATORS - REACH IN

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DOOR TYPE | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET |
|---------------|------------|------------|-------------------|-------|-------|--------|-------|-----|------|---------------|
| 1 SECTION | PR1HC-1AS | SOLID | 1/3 | 26.50 | 34.63 | 77.75 | 115 | 1/3 | 6.5 | 21.01 |
| | PR1HC-1AHS | HALF SOLID | 2/3 | | | | | | | |
| | PR1HC-1BG | GLASS | 1/3 | 26.50 | 33.38 | 77.75 | 115 | 1/3 | 6.5 | 21.01 |
| | PR1HC-1BHG | HALF GLASS | 2/3 | | | | | | | |
| 2 SECTIONS | PR2HC-1AS | SOLID | 2/6 | 52.13 | 34.63 | 77.75 | 115 | 1/3 | 6.5 | 44.57 |
| | PR2HC-1AHS | HALF SOLID | 4/6 | | | | | | | |
| | PR2HC-1BG | GLASS | 2/6 | 52.13 | 33.38 | 77.75 | 115 | 1/2 | 6.5 | 44.57 |
| | PR2HC-1BHG | HALF GLASS | 4/6 | | | | | | | |
| 3 SECTIONS | PR3HC-1AS | SOLID | 3/9 | 77.75 | 34.63 | 77.75 | 115 | 3/4 | 8.5 | 68.34 |
| | PR3HC-1AHS | HALF SOLID | 6/9 | | | | | | | |
| | PR3HC-1BG | GLASS | 3/9 | 77.75 | 33.38 | 77.75 | 115 | 3/4 | 8.5 | 68.34 |
| | PR3HC-1BHG | HALF GLASS | 6/9 | | | | | | | |

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

REFRIGERATORS - PASS-THRU

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DOOR TYPE | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET |
|---------------|-------------|------------|-------------------|-------|-------|--------|-------|----------|------|---------------|
| 1 SECTION | PRD1HC-1AS | SOLID | 2/3 | 26.50 | 38.38 | 77.75 | 115 | 1/3 | 6.5 | 22.9 |
| | PRD1HC-1AHS | HALF SOLID | 4/3 | | | | | | | |
| | PRD1HC-1BG | GLASS | 2/3 | | | | | | | |
| | PRD1HC-1BHG | HALF GLASS | 4/3 | | | | | | | |
| 2 SECTIONS | PRD2HC-1AS | SOLID | 4/6 | 52.13 | 38.38 | 77.75 | 115 | 1/3 | 6.5 | 48.33 |
| | PRD2HC-1AHS | HALF SOLID | 8/6 | | | | 115 | 3/4 | 8.5 | 48.33 |
| | PRD2HC-1BG | GLASS | 4/6 | | | | | | | |
| | PRD2HC-1BHG | HALF GLASS | 8/6 | | | | | | | |
| 3 SECTIONS | PRD3HC-1AS | SOLID | 6/9 | 77.75 | 38.38 | 77.75 | 115 | 3/4 | 8.5 | 74 |
| | PRD3HC-1AHS | HALF SOLID | 12/9 | | | | 115 | 1/3 (X2) | 10.8 | 75.1 |
| | PRD3HC-1BG | GLASS | 6/9 | | | | | | | |
| | PRD3HC-1BHG | HALF GLASS | 12/9 | | | | | | | |

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

REFRIGERATORS - ROLL-IN

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DOOR TYPE | DOORS | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET |
|------------|--------------|-----------|-------|--------|-------|--------|-------|--------|------|------------|
| 1 SECTION | PRI1HC-1AS | SOLID | 1 | 36.5 | 36.13 | 84 | 115 | 1/3 | 6.5 | 34.86 |
| | PRI1XTHC-1AS | | | | | 89.63 | | | | 38.06 |
| 2 SECTIONS | PRI2HC-1AS | SOLID | 2 | 68.88 | 36.13 | 84 | 115 | 3/4 | 8.5 | 70.84 |
| | PRI2XTHC-1AS | | | | | 89.63 | | | | 77.35 |
| 3 SECTIONS | PRI3HC-1AS | SOLID | 3 | 101.25 | 36.13 | 84 | 115 | 2x 1/3 | 10.8 | 106.81 |

Depth measurement includes handles.

REFRIGERATORS - ROLL-THRU

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DOOR TYPE | DOORS | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET |
|------------|--------------|-----------|-------|--------|-------|--------|-------|--------|------|------------|
| 1 SECTION | PRT1HC-1AS | SOLID | 2 | 36.5 | 39.88 | 84 | 115 | 3/4 | 8.5 | 38.69 |
| | PRT1XTHC-1AS | | | | | 89.63 | | | | 42.27 |
| 2 SECTIONS | PRT2HC-1AS | SOLID | 4 | 68.88 | 39.88 | 84 | 115 | 3/4 | 8.5 | 78.49 |
| | PRT2XTHC-1AS | | | | | 89.63 | | | | 85.76 |
| 3 SECTIONS | PRT3HC-1AS | SOLID | 6 | 101.25 | 39.88 | 84 | 115 | 2x 1/3 | 10.8 | 118.3 |

Depth measurement includes handles.

P SERIES

FREEZERS - REACH IN

MAINTAINS PRODUCT TEMPERATURES OF -10°F.

| SECTIONS | MODEL # | DOOR TYPE | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET |
|---------------|------------|------------|-------------------|-------|-------|--------|-------|---------|------|---------------|
| 1 SECTION | PF1HC-1AS | SOLID | 1/3 | 26.50 | 34.63 | 77.75 | 115 | 3/4 | 9.1 | 21.01 |
| | PF1HC-1AHS | HALF SOLID | 2/3 | | | | | | | |
| | PF1HC-1BG | GLASS | 1/3 | 26.50 | 33.38 | 77.75 | 115 | 3/4 | 9.1 | 21.01 |
| | PF1HC-1BHG | HALF GLASS | 2/3 | | | | | | | |
| 2 SECTIONS | PF2HC-1AS | SOLID | 2/6 | 52.13 | 34.63 | 77.75 | 115 | 3/4+ | 10.5 | 44.57 |
| | PF2HC-1AHS | HALF SOLID | 4/6 | | | | | | | |
| | PF2HC-1BG | GLASS | 2/6 | 52.13 | 33.38 | 77.75 | 115 | 2 X 3/4 | 13.9 | 44.57 |
| | PF2HC-1BHG | HALF GLASS | 4/6 | | | | | | | |
| 3 SECTIONS | PF3HC-1AS | SOLID | 3/9 | 77.75 | 34.63 | 77.75 | 115 | 2 X 3/4 | 13.9 | 68.34 |
| | PF3HC-1AHS | HALF SOLID | 6/9 | | | | | | | |
| | PF3HC-1BG | GLASS | 3/9 | 77.75 | 33.38 | 77.75 | 115 | 2 X 3/4 | 13.9 | 68.34 |
| | PF3HC-1BHG | HALF GLASS | 6/9 | | | | | | | |

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

FREEZERS - PASS-THRU

MAINTAINS PRODUCT TEMPERATURES OF -10°F.

| SECTIONS | MODEL # | DOOR TYPE | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET |
|---------------|-------------|------------|-------------------|-------|-------|--------|-------|---------|------|---------------|
| 1 SECTION | PFD1HC-1AS | SOLID | 2/3 | 26.50 | 38.38 | 77.75 | 115 | 3/4 | 9.1 | 22.9 |
| | PFD1HC-1AHS | HALF SOLID | 4/3 | | | | | | | |
| | PFD1HC-1BG | GLASS | 2/3 | 26.50 | 35.88 | 77.75 | 115 | 3/4 | 9.1 | 22.9 |
| | PFD1HC-1BHG | HALF GLASS | 4/3 | | | | | | | |
| 2 SECTIONS | PFD2HC-1AS | SOLID | 4/6 | 52.13 | 38.38 | 77.75 | 115 | 3/4+ | 10.5 | 48.33 |
| | PFD2HC-1AHS | HALF SOLID | 8/6 | | | | | | | |
| | PFD2HC-1BG | GLASS | 4/6 | 52.13 | 35.88 | 77.75 | 115 | 2 X 3/4 | 13.9 | 48.33 |
| | PFD2HC-1BHG | HALF GLASS | 8/6 | | | | | | | 48.66 |

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

FREEZERS - ROLL-IN

MAINTAINS PRODUCT TEMPERATURES OF -10°F.

| SECTIONS | MODEL # | DOOR TYPE | DOORS | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET |
|-------------------|---------------------|-----------|-------|---------------|--------------|--------------|-------|---------|------|------------|
| 1 SECTION | PFI1HC-1AS | SOLID | 1 | 36.5 | 36.13 | 84 | 115 | 3/4 | 9.1 | 34.86 |
| | PFI1XTHC-1AS | | | | | 89.63 | | | | 38.06 |
| 2 SECTIONS | PFI2HC-1AS | SOLID | 2 | 68.88 | 36.13 | 84 | 115 | 2 X 3/4 | 13.9 | 70.84 |
| | PFI2XTHC-1AS | | | | | 89.63 | | | | 77.35 |
| 3 SECTIONS | PFI3HC-1AS | SOLID | 3 | 101.25 | 36.13 | 84 | 115 | 2 X 3/4 | 13.9 | 106.81 |

*Depth measurement includes handles.***FREEZERS - ROLL-THRU**

MAINTAINS PRODUCT TEMPERATURES OF -10°F.

| SECTIONS | MODEL # | DOOR TYPE | DOORS | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET |
|-------------------|---------------------|-----------|-------|--------------|--------------|--------------|-------|---------|------|------------|
| 1 SECTION | PFT1HC-1AS | SOLID | 2 | 36.5 | 39.88 | 84 | 115 | 3/4+ | 10.5 | 38.69 |
| | PFT1XTHC-1AS | | | | | 89.63 | | | | 42.27 |
| 2 SECTIONS | PFT2HC-1AS | SOLID | 4 | 68.88 | 39.88 | 84 | 115 | 2 X 3/4 | 13.9 | 78.49 |
| | PFT2XTHC-1AS | | | | | 89.63 | | | | 85.76 |

*Depth measurement includes handles.***DUAL-TEMPS - REACH-IN**

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F (REFRIGERATOR), AND -10°F (FREEZER).

| SECTIONS | MODEL # | DOOR TYPE | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET |
|---|------------------------|------------|-------------------|--------------|--------------|--------------|----------|------------------|------------------|------------|
| 2 HALF SECTIONS (1 REFRIGERATOR 1 FREEZER) | PRF12-12HC-1HS | HALF SOLID | 2/4 | 26.63 | 34.63 | 77.75 | 115 (X2) | R: 1/3 F: 1/3 | R: 7.5 F: 7.5 | R: 9 |
| | PRF12-12HC-1HG | HALF GLASS | | | | | | | | F: 9 |
| 2 SECTIONS (1 REFRIGERATOR 1 FREEZER) | PRF24-24HC-1AS | SOLID | 2/6 | 52 | 33 | 77.75 | 115 (X2) | R: 1/3 F: 3/4 | R: 6.5 F: 9.1 | R: 21 |
| | PRF24-24HC-1AHS | HALF SOLID | | | | | | | | F: 21 |

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

CROSS TEMP[®] SERIES

Convertible Refrigeration



**CROSS TEMP
NOW AVAILABLE
IN CHEF BASES!**

SEE PAGE 138!



**Variable speed compressor
technology achieves up to
30% more energy efficiency
compared to a fixed-speed**

**7 year warranty on parts,
labor, and compressor**

Temperature range of -15 to 40° F

Modulates coil temp to achieve desired set point
while achieving maximum energy efficiency

Single cabinet configurable to all menu initiatives

Intuitive compressor
adjusts for optimal effectiveness in high-use situations

Quicker pull-down
for both air and product temperatures

Improved product stability

Smart-defrost

Expansion valve

Rapid-recovery after defrost

consistent product temperature and ensures food quality

Door locks standard

Solid doors only (optional on glass door models)

Field-reversible doors

(except for CT12-12HC models)

**Featuring environmentally friendly
energy efficient R290 refrigerant**



AVAILABLE DOORS

- Solid (one full-door)
- Half Solid (two half-doors)
- Glass (one full-door)
- Half Glass (two half-doors)
- One half door and two drawers (dual temp only)

**EXTERIOR FINISHES**

- Stainless steel front with gray painted steel sides
- Stainless steel sides/front

INTERIOR FINISHES

- Corrosion resistant aluminum
- Stainless steel

AVAILABLE OPTIONS

- Left hinge doors

AVAILABLE ACCESSORIES

- Tray Slides
- Additional shelves

MOUNTING OPTIONS


- 6" casters (standard)
- 6" legs
- 3" casters (single section only)
- Flanged/seismic feet

AGENCY CERTIFICATIONS

EASY-TO-USE CONTROLLER
to quickly adjust set points



VARIABLE SPEED SYSTEM
modulates coil temp

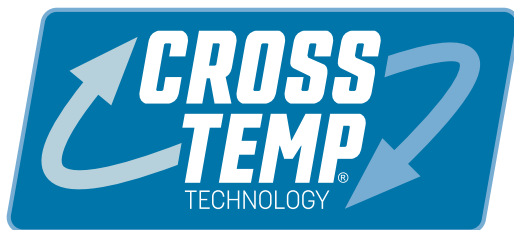

Easily converts from refrigerator to freezer
with Beverage-Air's exclusive Cross Temp® technology

WHAT IS CROSS TEMP® TECHNOLOGY?

New from Beverage-Air, Cross Temp™ technology allows the user to easily switch the unit back and forth from refrigerator to freezer as needed, with a range of -15° to 40°F.

THE PURPOSE OF CROSS TEMP®

Simply put, Cross Temp technology lets the user get the most flexibility from the unit, by letting them switch from fridge to freezer as their menus change with the seasons and initiatives, including ice-cream storage.

IS CROSS TEMP ENERGY EFFICIENT?

The Cross Temp® units are intuitive and self-adjust for optimal effectiveness based on usage. Even in high-usage situations, Cross Temp units adjust to maintain maximum energy efficiency.

HOW LONG DOES THE CONVERSION TAKE?

On average, a Cross Temp unit can convert from refrigerator to freezer or vice versa, in under an hour. (Conditions and results will vary)

CROSS TEMP® SERIES

1 & 2 SECTIONS

CAN CONVERT BETWEEN FREEZER AND REFRIGERATOR
TEMPERATURES FROM -15° TO 40°F

| SECTIONS | MODEL # | DOOR TYPE | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET |
|---------------|-----------|------------|-------------------|-------|-------|--------|-------|----------|------|---------------|
| 1 SECTION | CT1HC-1S | SOLID | 1/3 | 26 | 33.63 | 78.5 | 115 | 4/5 | 8 | 23.1 |
| | CT1HC-1HS | HALF SOLID | 2/3 | | | | | | | |
| | CT1HC-1G | GLASS | 1/3 | | | | | | | |
| | CT1HC-1HG | HALF GLASS | 2/3 | | | | | | | |
| 2 SECTIONS | CT2HC-1S | SOLID | 2/6 | 52 | 33.63 | 79 | 115 | 4/5 (X2) | 13.2 | 45.2 |
| | CT2HC-1HS | HALF SOLID | 4/6 | | | | | | | |
| | CT2HC-1G | GLASS | 2/6 | | | | | | | |
| | CT2HC-1HG | HALF GLASS | 4/6 | | | | | | | |

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

DUAL TEMP - 2 HALF SECTIONS

CAN CONVERT BETWEEN FREEZER AND REFRIGERATOR
TEMPERATURES FROM -15° TO 40°F

| SECTIONS | MODEL # | DOOR TYPE | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET |
|------------------------------|----------------|---------------------------|-------------------|-------|-------|--------|----------|------------------|------------------|---------------|
| 2 HALF SECTIONS (STACKED) | CT12-12HC-1HS | HALF SOLID | 2/4 | 26.5 | 34.88 | 78.13 | 115 (X2) | 1: 1/3 2: 1/3 | 1: 7.5 2: 7.5 | 1: 9 2: 9 |
| | CT12-12HC-1HG | HALF GLASS | | | | | | | | |
| 2 HALF SECTIONS (STACKED) | CT12-12HC-1HSD | HALF SOLID / 2 DRAWERS | 1/2 | 26.5 | 34.88 | 78.13 | 115 (X2) | 1: 1/3 2: 1/3 | 1: 7.5 2: 7.5 | 1: 9 2: 9 |

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.





Top Mount Reach-In Accessories

| DESCRIPTION | UNIT(S) | PART NUMBER |
|-------------|---------|-------------|
|-------------|---------|-------------|

| SHELVING / ORGANIZERS | | |
|---------------------------|--|-------------|
| Epoxy Coated Wire Shelf | H Series Flat Shelving 1 Door Unit | 412-020D-01 |
| Epoxy Coated Wire Shelf | H Series Flat Shelving HR1W Units | 412-023D-01 |
| Epoxy Coated Wire Shelf | H Series Flat Shelving 2 Door Unit | 412-021D-01 |
| Epoxy Coated Center Shelf | H Series Flat Shelving 3 Door Unit | 412-022D-01 |
| Epoxy Coated Wire Shelf | H Series Flat Shelving 3 Door Unit | 412-021D-01 |
| Epoxy Coated Wire Shelf | P Series, 1 section | 50597706 |
| Epoxy Coated Wire Shelf | P Series, 2 section or 3 section (left or right) | 50597806 |
| Epoxy Coated Wire Shelf | P Series, 3 section (center) | 50597906 |
| Epoxy Coated Wire Shelf | Cross Temp Flat Shelving 1 Door Unit (CT1) | 403-889D-01 |
| Epoxy Coated Wire Shelf | Cross Temp Flat Shelving 2 Door Unit (CT2) | 412-021D-01 |
| Epoxy Coated Wire Shelf | Cross Temp Flat Shelving (CT12) | 50597706 |
| S/S Shelves | H Series Flat Shelving 1 Door Unit | 412-020D-04 |
| S/S Shelves | H Series Flat Shelving 1 Door Wide Unit | 412-023D-04 |
| S/S Shelves | H Series Flat Shelving 2 & 3 Door Unit | 412-021D-04 |
| S/S Shelves | H Series Flat Shelving 3 Door Unit-Center | 412-022D-04 |
| S/S Shelves | Cross Temp Flat Shelving 1 Door Unit (CT1) | 403-889D-04 |
| Shelf Clip | Any H Series Unit / Cross Temp 1 Door Unit (CT1) | 403-169A |
| Shelf Clip | P Series / Cross Temp (CT12) | 50022601 |


| MOUNTING | | |
|---------------------------------------|--|-------------|
| 6" Caster (set of four) | Any H Series Unit / Cross Temp 1 Door Unit (CT1) | 61C01-001A |
| 3" Caster (set of four) | Any H Series Unit / Cross Temp 1 Door Unit (CT1) | 61C01-013A |
| 6" Black Leg (set of four) | Any H Series Unit / Cross Temp 1 Door Unit (CT1) | 58B02-001A |
| 6" Seismic/Flanged Legs (set of four) | Any H Series Unit / Cross Temp 1 Door Unit (CT1) | 00C31-055A |
| 6" Casters (set of four) | P Series | 0-0140-105S |
| 3" Casters (set of four) | P Series | 0-0140-103S |
| 6" Seismic/Flanged Legs (set of four) | P Series | 00C26-028A |


| ADDITIONAL ACCESSORIES | | |
|------------------------|--|------------|
| Door Lock | Glass Door H Series / Glass Door Cross Temp (CT1) (per door) | 61C11S032A |
| Door lock | P Series | 50597111 |
| S/S Breakers Half Door | Any H Series Unit | 61C08-019A |
| S/S Breakers Full Door | Any H Series Unit (except extra-wide units) | 61C08-020A |

Tray Slides

| DESCRIPTION | UNIT(S) | PART NUMBER |
|-------------|---------|-------------|
|-------------|---------|-------------|


INDIVIDUAL TRAY SLIDES
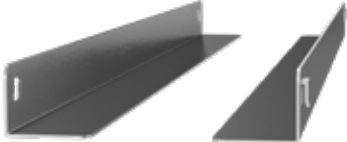
| 1 pair of type "A" tray slides | H-Series / P-Series / Cross Temp Series | 10601211S | | |
|--|---|-----------|----|----|
|  <p>Pilaster and mounting hardware not included. Contact us for hardware selection.</p> | Bottom support for (1) 18x26" pan, or (2) 14x18" pans | | | |
| | SPACING | 2" | 3" | 4" |
| | Full Door | 26 | 18 | 13 |
| | Half Door | 12 | 8 | 6 |
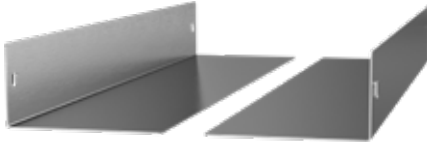
| 1 pair of type "A/C" tray slides | H-Series / Cross Temp Series (except CT12) | 10601201S | |
|---|--|-----------|-----------|
|  <p>Pilaster and mounting hardware not included. Contact us for hardware selection.</p> | Bottom support for (1) 18x26" pan, or (2) 14x18" pans, or (2) 12x20" pans | | |
| | SPACING | 3" | 4" |
| | Full Door | 18 | 13 |
| | Half Door | 8 | 6 |
| | | | |

TRAY SLIDE KITS

EPOXY COATED WIRE ROD TRAY SLIDE KIT #4 - 1/2 SECTION
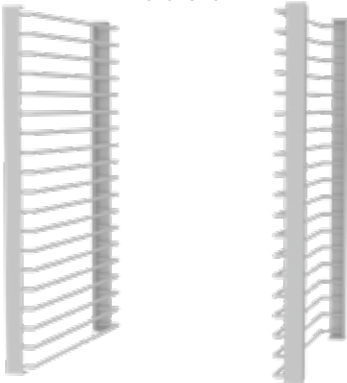
| | | |
|--|---------------------------|-----------------------------------|
| <p>1/2 SECTION 19 SLOTS</p>  | H Series - 1 Section Unit | 61C31-251A-01 (order 2) |
| | H Series - 2 Section Unit | 61C31-251A-02 (order 4) |
| | H Series - 3 Section Unit | 61C31-251A-03 (order 6) |



BOTTOM MOUNT REACH-INS

MULTIPLE OPTIONS TO MEET ANY COOLING CHALLENGE OR ENVIRONMENT



Vista Series



Horizon Series



RI Series

VISTA® SERIES

Refrigerators & Freezers



**Designed to perform in
high ambient conditions**

**7 year warranty on parts,
labor, and compressor**

Made in USA

Full electronic control

Door locks standard

(on solid doors only except RB/FB12HC-1S;
optional on glass door models)

One piece grille

Cartridge style door hinges

with 120 degree stay-open feature

LED lighting standard

Self-closing doors

Right and Left hinged models available

(specify at time of order)

6" heavy duty casters standard

(3" casters or 6" leg option available
at no charge when specified on order)

Environmentally friendly, energy efficient R290 refrigerant



AVAILABLE DOORS

- Solid *(one full-door)*
- Glass *(one full-door)*



EXTERIOR FINISHES

- Stainless steel front with gray painted steel sides

INTERIOR FINISHES

- Corrosion resistant aluminum

AVAILABLE OPTIONS

- Left hinge doors
- Remote models available


AVAILABLE ACCESSORIES

- Additional shelves
- Tray slide kits

MOUNTING OPTIONS

- 6" casters (standard)
- 6" legs
- 3" casters
- Flanged/seismic feet

AGENCY CERTIFICATIONS

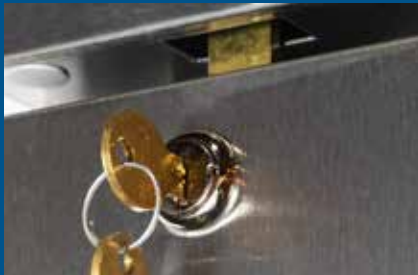

DOOR LOCKS STANDARD

on solid door units for loss prevention
(not available on RB/FB12;
available as an option for glass doors)



FULL ELECTRONIC CONTROL

with easy to read digital display

1, 2, AND 3 SECTION MODELS AVAILABLE



VISTA® SERIES

REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DOOR TYPE | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET |
|----------------------|-----------|-----------|-------------------|-------|-------|--------|-------|-----|------|---------------|
| 1 SECTION | RB12HC-1S | SOLID | 1/4 | 24 | 26 | 61.38 | 115 | 1/6 | 2 | 11.8 |
| 1 SHALLOW SECTION | RB19HC-1S | SOLID | 1/3 | 27.25 | 27.75 | 78.13 | 115 | 1/4 | 2.88 | 19.08 |
| | RB19HC-1G | GLASS | | 27.25 | 27.5 | 78.13 | | | | |
| 1 SECTION | RB23HC-1S | SOLID | 1/3 | 27.25 | 33.75 | 78.13 | 115 | 1/4 | 2.88 | 23.32 |
| | RB23HC-1G | GLASS | | 27.25 | 33.5 | 78.13 | | | | |
| 1 SECTION | RB27HC-1S | SOLID | 1/3 | 30 | 33.75 | 78.13 | 115 | 1/4 | 2.88 | 25.97 |
| | RB27HC-1G | GLASS | | 30 | 33.5 | 78.13 | | | | |
| 2 SECTIONS | RB35HC-1S | SOLID | 2/6 | 39.5 | 33.75 | 78.13 | 115 | 1/3 | 3.9 | 35.08 |
| | RB35HC-1G | | | 39.5 | 33.5 | 78.13 | | | | |
| 2 SECTIONS | RB44HC-1S | SOLID | 2/6 | 47 | 33.75 | 78 | 115 | 1/3 | 3.9 | 44 |
| | RB44HC-1G | GLASS | | 47 | 33.5 | 78 | | | | |
| 2 SECTIONS | RB49HC-1S | SOLID | 2/6 | 52 | 33.5 | 78.25 | 115 | 1/3 | 3.9 | 46.15 |
| | RB49HC-1G | GLASS | | 52 | 33.5 | 78.25 | | | | |
| 3 SECTIONS | RB72HC-1S | SOLID | 3/9 | 75 | 33.75 | 78.13 | 115 | 1/2 | 6.12 | 70.19 |
| | RB72HC-1G | GLASS | | 75 | 33.5 | 78.13 | | | | |

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

FREEZERS

MAINTAINS PRODUCT TEMPERATURES OF -10°F.

| SECTIONS | MODEL # | DOOR TYPE | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET |
|------------------------------|------------------|-----------|-------------------|--------------|--------------|--------------|-------|-------------|-------|---------------|
| 1 SECTION | FB12HC-1S | SOLID | 1/3 | 24 | 26 | 61.38 | 115 | 1/2 | 5 | 11.9 |
| 1 SHALLOW SECTION | FB19HC-1S | SOLID | 1/3 | 27.25 | 27.75 | 78.13 | 115 | 3/4 | 6.34 | 19.08 |
| | FB19HC-1G | GLASS | | 27.25 | 27.5 | 78.13 | | | | |
| 1 SECTION | FB23HC-1S | SOLID | 1/3 | 27.25 | 33.75 | 78.13 | 115 | 3/4 | 6.34 | 23.32 |
| | FB23HC-1G | GLASS | | 27.25 | 33.5 | 78.13 | | | | |
| 1 SECTION | FB27HC-1S | SOLID | 1/3 | 30 | 33.75 | 78.13 | 115 | 3/4 | 10 | 25.97 |
| | FB27HC-1G | GLASS | | 30 | 33.5 | 78.13 | | | | |
| 2 SECTIONS | FB35HC-1S | SOLID | 2/6 | 39.5 | 33.75 | 78.13 | 115 | 3/4 | 10 | 35.08 |
| | FB35HC-1G | | | 39.5 | 33.5 | 78.13 | | | | |
| 2 SECTIONS | FB44HC-1S | SOLID | 2/6 | 47 | 33.75 | 78.13 | 115 | 3/4 | 10 | 44 |
| | FB44HC-1G | GLASS | | 47 | 33.5 | 78.13 | | | 13.9 | |
| 2 SECTIONS | FB49HC-1S | SOLID | 2/6 | 52 | 33.75 | 78.25 | 115 | 3/4 | 10 | 46.2 |
| | FB49HC-1G | GLASS | | 52 | 33.75 | 78.25 | | | 13.9 | |
| 3 SECTIONS | FB72HC-1S | SOLID | 3/9 | 75 | 33.75 | 78.13 | 115 | 3/4 (X2) | 13.9 | 68.43 |
| | FB72HC-1G | GLASS | | 75 | 33.5 | 78.13 | | | 15.93 | |

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

HORIZON® SERIES

Refrigerators & Freezers



**Designed to perform in
high ambient conditions**

**7 year warranty on parts,
labor, and compressor**

Made in USA

Heavy Duty Construction

(2" CFC and HCFC-free foamed-in place
polyurethane insulation)

Full electronic Control

with one-touch defrost

Door locks standard

(solid doors only, except HBR/HBF12;
optional on glass door models)

Cartridge-style hinges

with 120 degree stay open feature

LED lighting standard

Self-closing doors

6" heavy duty casters standard

(3" casters or 6" leg option available at
no charge when specified on order)

Environmentally friendly, energy efficient R290 refrigerant



AVAILABLE DOORS

- Solid (*one full-door*)
- Half Solid (*two half-doors*)
- Glass (*one full-door*)
- Half Glass (*two half-doors*)



EXTERIOR FINISHES

- Stainless steel

INTERIOR FINISHES

- Stainless steel

AVAILABLE OPTIONS

- Left hinge doors
- Remote models available


AVAILABLE ACCESSORIES

- Additional shelves
- Tray slide kits
- Wine models
- Dual-temp

MOUNTING OPTIONS

- 6" casters (standard)
- 6" legs
- 3" casters
- Flanged/seismic feet

AGENCY CERTIFICATIONS

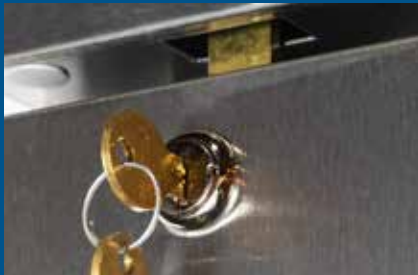

DOOR LOCKS STANDARD

on solid door units for loss prevention
(not available on HBR/HBF12;
available as an option for glass doors)



FULL ELECTRONIC CONTROL

with easy to read digital display

1, 2, AND 3 SECTION MODELS AVAILABLE



HORIZON® SERIES

REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DOOR TYPE | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET |
|----------------------|--------------|------------|-------------------|-------|-------|--------|-------|-----|------|---------------|
| 1 SECTION | HBR12HC-1 | SOLID | 1/4 | 24 | 26 | 61.38 | 115 | 1/6 | 2 | 12.06 |
| 1 SHALLOW SECTION | HBR19HC-1 | SOLID | 1/3 | 27.25 | 27.75 | 78.13 | 115 | 1/4 | 2.88 | 19.08 |
| | HBR19HC-1-G | GLASS | | 27.25 | 27.5 | 78.13 | | | | |
| 1 SECTION | HBR23HC-1 | SOLID | 1/3 | 27.25 | 33.75 | 78.13 | 115 | 1/4 | 2.88 | 23.32 |
| | HBR23HC-1-HS | HALF SOLID | 2/3 | | | | | | | |
| | HBR23HC-1-G | GLASS | 1/3 | 27.25 | 33.5 | 78.13 | | | | |
| | HBR23HC-1-HG | HALF GLASS | 2/3 | | | | | | | |
| 1 SECTION | HBR27HC-1 | SOLID | 1/3 | 30 | 33.75 | 78.13 | 115 | 1/4 | 2.88 | 25.97 |
| | HBR27HC-1-HS | HALF SOLID | 2/3 | | | | | | | |
| | HBR27HC-1-G | GLASS | 1/3 | 30 | 33.5 | 78.13 | | | | |
| | HBR27HC-1-HG | HALF GLASS | 2/3 | | | | | | | |
| 2 SECTIONS | HBR35HC-1 | SOLID | 2/6 | 39.5 | 33.75 | 78.13 | 115 | 1/3 | 3.9 | 35.08 |
| | HBR35HC-1-G | GLASS | | 39.5 | 33.5 | 78.13 | | | | |
| 2 SECTIONS | HBR44HC-1 | SOLID | 2/6 | 47 | 33.75 | 78.25 | 115 | 1/3 | 3.9 | 40.2 |
| | HBR44HC-1-HS | HALF SOLID | 4/6 | | | | | | | |
| | HBR44HC-1-G | GLASS | 2/6 | | | | | | | |
| | HBR44HC-1-HG | HALF GLASS | 4/6 | | | | | | | |
| 2 SECTIONS | HBR49HC-1 | SOLID | 2/6 | 52 | 33.75 | 78.25 | 115 | 1/3 | 3.9 | 46.15 |
| | HBR49HC-1-HS | HALF SOLID | 4/6 | | | | | | 5 | |
| | HBR49HC-1-G | GLASS | 2/6 | | | | | | 3.9 | |
| | HBR49HC-1-HG | HALF GLASS | 4/6 | | | | | | 3.9 | |
| 3 SECTIONS | HBR72HC-1 | SOLID | 3/9 | 75 | 33.75 | 78.13 | 115 | 1/2 | 6.12 | 70.19 |
| | HBR72HC-1-HS | HALF SOLID | 6/9 | | | | | | | |
| | HBR72HC-1-G | GLASS | 3/9 | 75 | 33.5 | 78.13 | | | | |
| | HBR72HC-1-HG | HALF GLASS | 6/9 | | | | | | | |

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

FREEZERS

MAINTAINS PRODUCT TEMPERATURES OF -10°F.

| SECTIONS | MODEL # | DOOR TYPE | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET |
|----------------------|--------------|------------|-------------------|-------|-------|--------|-------|----------|-------|---------------|
| 1 SECTION | HBF12HC-1 | SOLID | 1/3 | 24 | 26 | 61.38 | 115 | 1/2 | 5 | 11.9 |
| | HBF12HC-1-G | GLASS | | 24 | 24.5 | 61.38 | | | | |
| 1 SHALLOW SECTION | HBF19HC-1 | SOLID | 1/3 | 27.25 | 27.75 | 78.13 | 115 | 3/4 | 6.34 | 19.08 |
| | HBF19HC-1-G | GLASS | | 27.25 | 27.5 | 78.13 | | | | |
| 1 SECTION | HBF23HC-1 | SOLID | 1/2 | 27.25 | 33.75 | 78.13 | 115 | 3/4 | 6.34 | 23.32 |
| | HBF23HC-1-HS | HALF SOLID | 2/2 | | | | | | | |
| | HBF23HC-1-G | GLASS | 1/2 | 27.25 | 33.5 | 78.13 | | | | |
| | HBF23HC-1-HG | HALF GLASS | | | | | | | | |
| 1 SECTION | HBF27HC-1 | SOLID | 1/2 | 30 | 33.75 | 78.13 | 115 | 3/4 | 10 | 25.97 |
| | HBF27HC-1-HS | HALF SOLID | 2/2 | | | | | | 7.5 | |
| | HBF27HC-1-G | GLASS | 1/2 | 30 | 33 | 78.13 | | | 10 | |
| 2 SECTIONS | HBF35HC-1 | SOLID | 2/6 | 39.5 | 33.75 | 78.13 | 115 | 3/4 | 10 | 35.08 |
| | HBF35HC-1-G | GLASS | | 39.5 | 33.5 | 78 | | | | |
| 2 SECTIONS | HBF44HC-1 | SOLID | 2/6 | 47 | 33.75 | 78.25 | 115 | 3/4 | 10 | 44 |
| | HBF44HC-1-HS | HALF SOLID | 4/6 | | | | | 3/4 | 10 | |
| | HBF44HC-1-G | GLASS | 2/6 | | | | | 3/4 (X2) | 13.9 | |
| 2 SECTIONS | HBF49HC-1 | SOLID | 2/6 | 52 | 33.75 | 78.25 | 115 | 3/4 | 10 | 46.2 |
| | HBF49HC-1-HS | HALF SOLID | 4/6 | | | | | 3/4 | 10 | |
| | HBF49HC-1-G | GLASS | 2/6 | | | | | 3/4 (X2) | 13.9 | |
| 3 SECTIONS | HBF72HC-1 | SOLID | 3/9 | 75 | 33.75 | 78.13 | 115 | 3/4 (X2) | 13.9 | 68.43 |
| | HBF72HC-1-HS | HALF SOLID | 6/9 | 75 | 33.75 | 78.13 | | 3/4 (X2) | 13.9 | |
| | HBF72HC-1-G | GLASS | 3/9 | 75 | 33.5 | 78.13 | | 3/4 (X2) | 15.93 | |

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

HORIZON® SERIES

DUAL-TEMPS

MAINTAINS PRODUCT TEMPERATURES OF
36-38°F (REFRIGERATOR), AND -10°F (FREEZER).

| SECTIONS | MODEL # | DOOR TYPE | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET |
|--|----------------|------------|-------------------|-------|-------|--------|----------|-------------------|------------------|----------------------|
| 2 HALF SECTIONS (1 REFRIGERATOR 1 FREEZER) | HBRF23HC-1-A | HALF SOLID | 2/4 | 27.25 | 33.75 | 78 | 115 (X2) | R: 1/10 F: 1/2 | R: 2 F: 4 | R: 11.5 F: 8.65 |
| 2 SECTIONS (1 REFRIGERATOR 1 FREEZER) | HBRF49HC-1-A | SOLID | 2/6 | 52 | 33.75 | 78 | 115 (X2) | R: 1/4 F: 3/4 | R: 2.4 F: 7.5 | R: 21.01 F: 21.01 |
| | HBRF49HC-1-A-G | GLASS | | | | | | | | |
| 3 SECTIONS (1 REFRIGERATOR 2 FREEZER) | HBRF72HC-1-B | SOLID | 3/9 | 75 | 33.75 | 78 | 115 (X2) | R: 1/4 F: 1 | R: 2.4 F: 11 | R: 19.62 F: 44.85 |
| | HBRF72HC-1-B-G | GLASS | | | | | | | | |

*Freezers powered by 115/208-230 volts are designed for field wiring (requires 4-wire electrical circuit, hard-wired).

Depth measurement includes handles.



HBRF72HC-1-B

All options for Horizon Bottom Mount Dual Temps are specified within the model number using the designated codes described below.

HBRF23HC EXAMPLE

Customer orders a HBRF23HC-1-A

- The refrigerator will be on the TOP with Right hinged door. The freezer will be on the BOTTOM with Right hinged door. (RF)

HB (RF, FR) 23 - COOLER CONFIGURATIONS

HALF DOOR ON TOP - HALF DOOR ON BOTTOM

| | |
|-----------|--|
| FR | Freezer on the Top with Right Hinged Door, Refrigerator on the Bottom with Right Hinged Door |
| RF | Refrigerator on the Top with Right Hinged Door, Freezer on the Bottom with Right Hinged Door |
| RR | One Refrigerator on Top, second Refrigerator on the Bottom, Right Hinged Doors |

SPECIAL DOOR OPENINGS - ADD NUMBER TO END OF MODEL NUMBER

| | |
|------------|-----------------------|
| -18 | All Left Hinged Doors |
|------------|-----------------------|

HBRF49HC EXAMPLE

Customer orders a HBRF49HC-1-A

- The refrigerator will be on the LEFT with Left hinged door. The freezer will be on the RIGHT with Right hinged door. (RF)

HB (RF, FR) 49 - COOLER CONFIGURATIONS

SINGLE DOOR ON LEFT - SINGLE DOOR ON RIGHT

| | |
|-----------|---|
| FR | Freezer on the Left with Left Hinged Door, Refrigerator on the Right with Right Hinged Door |
| RF | Refrigerator on the Left with Left Hinged Door, Freezer on the Right with Right Hinged Door |
| RR | One Refrigerator on the Left, second Refrigerator on Right |

SPECIAL DOOR OPENINGS - ADD NUMBER TO END OF MODEL NUMBER

| | |
|------------|-----------------------|
| -18 | All Left Hinged Doors |
|------------|-----------------------|

| | |
|-------------|------------------------|
| -015 | All Right Hinged Doors |
|-------------|------------------------|

HBRF72 EXAMPLE

Customer orders a HBRF72HC-1-B

- The refrigerator will be on the left and freezer will be on the right (RF)
- Single section on the left, and double section on the right (B)

HB (RF, FR) 72 - COOLER CONFIGURATIONS

Refrigerator/Freezer Location

| | |
|-----------|--|
| FR | Freezer on the Left, Refrigerator on the right |
| RF | Refrigerator on the Left, Freezer on the right |
| RR | One Refrigerator on the Left, second Refrigerator on Right |

Door Configuration

| | |
|----------|---|
| B | Single section on left, Double section on right |
| C | Double section on left, Single section on right |

B DOOR OPENINGS - ADD NUMBER TO END OF MODEL NUMBER

| | |
|-------------|---|
| | Standard - Single section on the Left with Left Hinged Door, 2 Door Section on the Right with Left/Right Hinged Doors |
| -282 | Single section on the Left with Left Hinged Door, 2 Door Section on the Right with 2 Right Hinged Doors |
| -18 | Single section on the Left with Left Hinged Door, 2 Door Section on the Right with 2 Left Hinged Doors |
| -015 | Single section on the Left with Right Hinged Door, 2 Door Section on the Right with 2 Right Hinged Doors |

C DOOR OPENINGS - ADD NUMBER TO END OF MODEL NUMBER

| | |
|-------------|---|
| | Standard - 2 Door Section on the Left with Left/Right Hinged Doors, Single Door Section on the Right with Right Hinged Door |
| -18 | 2 Door Section on the Left with 2 Left Hinged Doors, Single Door Section on the Right with Left Hinged Door |
| -015 | 2 Door Section on the Left with 2 Right Hinged Doors, Single Door Section on the Right with Right Hinged Door |
| -103 | 2 Door Section on the Left with 2 Left Hinged Doors, Single Door Section on the Right with Right Hinged Door |

RI SERIES

Refrigerators



**Designed to perform in
high ambient conditions**

**7 year warranty on parts,
labor, and compressor**

Made in USA

Compact design

to fit challenging kitchen layouts

Heavy Duty Construction

(2" CFC and HCFC-free foamed-in place
polyurethane insulation)

Cartridge-style hinges

with 120 degree stay open feature

LED lighting standard

Self-closing doors

6" heavy duty casters standard

(3" casters or 6" leg option available at
no charge when specified on order)

**Uses environmentally friendly,
energy efficient R290 refrigerant**



FULL ELECTRONIC CONTROL

with easy to read digital display



BUILT-IN LED LIGHTS

Improved LED lighting for better product display

REFRIGERATORS (REACH-IN)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DOOR TYPE | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET |
|--------------|------------|--------------------------|-------------------|-------|-------|--------|-------|-----|------|---------------|
| 1 SECTION | RI18HC | SOLID | 1/4 | 27.25 | 29.25 | 69 | 115 | 1/4 | 5.5 | 16.85 |
| | RI18HC-HS | HALF SOLID | 2/5 | | | | | | | |
| | RI18HC-G | GLASS | 1/4 | | | | | | | |
| | RI18HC-HG | HALF GLASS | 2/5 | | | | | | | |
| | RI18HC-HGS | HALF GLASS HALF SOLID | 2/5 | | | | | | | |

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice

REFRIGERATORS (PASS-THRU)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DOOR TYPE | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET |
|--------------|-------------|--------------------------|-------------------|-------|-------|--------|-------|-----|------|---------------|
| 1 SECTION | RID18HC-HS | HALF SOLID | 4/5 | 27.25 | 32.63 | 69 | 115 | 1/4 | 5.5 | 18.38 |
| | RID18HC-HG | HALF GLASS | | | | | | | | |
| | RID18HC-HGS | HALF GLASS HALF SOLID | | | | | | | | |

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice

AVAILABLE DOORS

- Solid (one full-door)
- Half Solid (two half-doors)
- Glass (one full-door)
- Half Glass (two half-doors)
- Half Glass, Half Solid (two half-doors)

EXTERIOR FINISHES

- Stainless steel

INTERIOR FINISHES

- Stainless steel

AVAILABLE OPTIONS

- Left hinge doors

AVAILABLE ACCESSORIES

- Additional shelves
- Wire shelf divider
- Bottle cartridge kit

MOUNTING OPTIONS

- 6" casters (standard)
- 6" legs
- 3" casters
- Flanged/seismic feet

AGENCY CERTIFICATIONS



Bottom Mount Reach-In Accessories

| DESCRIPTION | UNIT(S) | PART NUMBER |
|--|--|--------------------------------|
| SHELVING / ORGANIZERS | | |
| Epoxy Coated Wire Shelf | RB/FB/HBR/HBF23 | 403-900D-02 |
| Epoxy Coated Wire Shelf | RB/FB/HBR/HBF27 | 403-871D-02 |
| Epoxy Coated Wire Shelf | RB/FB/HBR/HBF49 | 403-873D-02 |
| Epoxy Coated Wire Shelf | RB/FB/HBR/HBF72 | 403-874D-02 |
| Epoxy Coated Wire Shelf | RI18 | 403-207D |
| Shelf Clip | RB/FB/HBR/HBF | 403-169A |
| Flat Wine Rack with Bottle Support | RB/HBR23 | 403-928D-04 |
| Flat Wine Rack with Bottle Support | RB/HBR27 | 403-929D-04 |
| Flat Wine Rack with Bottle Support | RB/HBR49 | 403-930D-04 |
| Flat Wine Rack with Bottle Support | RB/HBR72 | 403-931D-04 |
| Wire Divider | RI Series | 403-719C |
| MOUNTING | | |
| 3" Caster Kit | RB/FB/HBR/HBF | 61C01-018D-01 |
| 6" Caster Kit | RB/FB/HBR/HBF | 61C01-014D-01 |
| 6" Seismic/Flanged Legs | RB/FB/HBR/HBF Series (set of four) | 00C31-055A |
| 3" Caster | RI Series | 401-695B |
| 3" Caster With Brake | RI Series | 401-696B |
| 6" Caster | RI Series | 401-275A |
| 6" Caster With Brake | RI Series | 401-276A |
| 6" Black Legs | RI Series | 401-405A |
| ADDITIONAL ACCESSORIES | | |
| Door Lock (at time of order) | RB/FB/HBR/HBF (SOLID DOORS, except RB/FB12 and HBR/HBF12) | 401-274A |
| TRAY SLIDE KITS | | |
| KIT #3 STAINLESS STEEL UNIVERSAL TRAY SLIDE | | |
| 8 PAIRS PER 1/2 SECTION | RB/FB/HBR/HBF 23 | 61C08-038A-02 (order 2) |
| | RB/FB/HBR/HBF 49 | 61C08-038A-01 (order 4) |





WARMING CABINETS

KEEP FOOD WARM, FRESH, AND SAFE THROUGH THE PREP-TO-DELIVERY PROCESS



Horizon Series



P Series

HORIZON® SERIES

Warming Cabinets



Optimal airflow for consistent cabinet temperature

7 year parts and labor warranty

Made in USA

Adjustable Electronic Temp Control

From 80°F To 180°F

Built-In Adjustable Humidity Control Vent

Safety Shielded Strip Type Heating Elements

Externally Mounted Blower

Maintains Even Temperatures

Stainless Steel Front

With Gray Painted Galvanized Sides

Corrosion Resistant Aluminum Interior

Stainless Steel Breaker Caps

Snap-In Magnetic Door Gasket

Heavy-Duty Cam Lift Hinges

Stay-Open Door Feature

For Easy Product Loading

3 Heavy-Duty Epoxy Coated Shelves

per section



FULL ELECTRONIC CONTROL

with easy to read digital display



FIELD-REVERSIBLE DOORS

for flexibility to get your kitchen set up exactly how you want it

WARMING CABINETS

ADJUSTABLE ELECTRONIC TEMP CONTROL FROM 80°F TO 180°F

| SECTIONS | MODEL # | DOOR TYPE | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | WATTS | AMPS | CUBIC FEET |
|-------------------------|-----------|-----------|-------------------|-------|-------|--------|-------------|-------|-----------|---------------|
| 1 SECTION | HH1-1S | SOLID | 1/3 | 26 | 33.88 | 78.5 | 208- 240 | 1500 | 5.9 / 6.8 | 21.17 |
| 1 SECTION PASS-THRU | HH-1S-PT | SOLID | 2/3 | 26 | 36.75 | 78.5 | 208- 240 | 1500 | 5.9 / 6.8 | 21.17 |
| 2 SECTIONS | HH2-1S | SOLID | 2/6 | 52 | 33.88 | 78.5 | 208- 240 | 3000 | 11.3 / 13 | 45.04 |
| 2 SECTIONS PASS-THRU | HH2-1S-PT | SOLID | 4/6 | 52 | 36.75 | 78.5 | 208- 240 | 3000 | 11.3 / 13 | 45.04 |

Depth measurement includes handles. For total height, add 6 inches for casters.



FOAMED-IN-PLACE DUCT

flows air down to
the warming unit



creating optimal air distribution throughout
cabinet without decreasing interior space.

Illustrated with the safety shield removed to give
a good view of the heating element and vent.

AVAILABLE DOORS

- Solid (one full-door)

EXTERIOR FINISHES

- Stainless steel front with
gray painted steel sides

INTERIOR FINISHES

- Corrosion resistant aluminum
- Stainless steel

AVAILABLE OPTIONS

- Left hinge doors

AVAILABLE ACCESSORIES

- Tray Slides
- Additional shelves

MOUNTING OPTIONS

- 6" casters (standard)
- 6" legs
- 3" casters
- Flanged/seismic feet

AGENCY CERTIFICATIONS



P SERIES

Spec Line Warming Cabinets



Maximum resistance to wear and tear with stainless steel breaker caps and door liners

Modular interior gives maximum flexibility for shelf and slide combinations

7 Year parts and labor warranty

Stainless steel breakers

Full electronic control

Self-closing doors

with 120° stay-open feature, on cam-lift hinges

Built-in adjustable humidity control

Door locks standard

for both Solid and Glass doors

Magnetic gasket attached to each door

for positive seal

6" adjustable legs

(3" casters or 6" caster option available at no charge when specified on order)

3 chrome-plated wire shelves

per section

Removable access panel

for ease of service and maintenance

Temperature range from 80-180° F



AVAILABLE DOORS

- Solid (*one full-door*)
- Half Solid (*two half-doors*)
- Glass (*one full-door*)
- Half Glass (*two half-doors*)



EXTERIOR FINISHES

- Stainless steel

INTERIOR FINISHES

- Corrosion-resistant aluminum
- Stainless steel

AVAILABLE OPTIONS

- Left hinge doors

AVAILABLE ACCESSORIES

- Additional shelves
- Tray slide kits (reach-in & pass-thru only)
- Stainless steel shelves
- Kick plate

MOUNTING OPTIONS

- 6" legs (standard)
- 6" casters
- 3" casters
- Flanged/seismic feet

AGENCY CERTIFICATIONS



TRAY SLIDES A AVAILABLE
holds one 18x26" or two 14x18"



TRAY SLIDES A/C AVAILABLE
hold one 18x26", or two 14x18", or two 12x20"

1, 2, AND 3 SECTION MODELS AVAILABLE IN REACH-IN, PASS-THRU, ROLL-IN, ROLL-THRU, AND EXTRA-TALL



P SERIES

WARMING CABINETS - REACH IN

TEMPERATURE RANGE FROM 80-180° F

| SECTIONS | MODEL # | DOOR TYPE | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | WATTS | AMPS | CUBIC FEET |
|---------------|----------|------------|-------------------|-------|-------|--------|---------|-------|------|---------------|
| 1 SECTION | PH1-1S | SOLID | 1/3 | 26.50 | 35 | 77.75 | 208-240 | 1500 | 6.3 | 21.5 |
| | PH1-1HS | HALF SOLID | 2/3 | 26.50 | 35 | 77.75 | 208-240 | 1500 | 6.3 | 21.5 |
| | PH1-1BG | GLASS | 1/3 | 26.50 | 33.38 | 77.75 | 208-240 | 1500 | 6.3 | 21.5 |
| | PH1-1BHG | HALF GLASS | 2/3 | 26.50 | 33.38 | 77.75 | 208-240 | 1500 | 6.3 | 21.5 |
| 2 SECTIONS | PH2-1S | SOLID | 2/6 | 52.13 | 35 | 77.75 | 208-240 | 3000 | 13 | 46.5 |
| | PH2-1HS | HALF SOLID | 4/6 | 52.13 | 35 | 77.75 | 208-240 | 3000 | 13 | 46.5 |
| | PH2-1BG | GLASS | 2/6 | 52.13 | 33.38 | 77.75 | 208-240 | 3000 | 13 | 46.5 |
| | PH2-1BHG | HALF GLASS | 4/6 | 52.13 | 33.38 | 77.75 | 208-240 | 3000 | 13 | 46.5 |

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

WARMING CABINETS - PASS-THRU

TEMPERATURE RANGE FROM 80-180° F

| SECTIONS | MODEL # | DOOR TYPE | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | WATTS | AMPS | CUBIC FEET |
|---------------|-------------|------------|-------------------|-------|-------|--------|---------|-------|------|---------------|
| 1 SECTION | PH1-1S-PT | SOLID | 2/3 | 26.50 | 38.38 | 77.75 | 208-240 | 1500 | 6.3 | 21.5 |
| | PH1-1HS-PT | HALF SOLID | 4/3 | 26.50 | 38.38 | 77.75 | 208-240 | 1500 | 6.3 | 21.5 |
| | PH1-1BG-PT | GLASS | 2/3 | 26.50 | 35.88 | 77.75 | 208-240 | 1500 | 6.3 | 21.5 |
| | PH1-1BHG-PT | HALF GLASS | 4/3 | 26.50 | 35.88 | 77.75 | 208-240 | 1500 | 6.3 | 21.5 |
| 2 SECTIONS | PH2-1S-PT | SOLID | 4/6 | 52.13 | 38.38 | 77.75 | 208-240 | 3000 | 13 | 46.5 |
| | PH2-1HS-PT | HALF SOLID | 8/6 | 52.13 | 38.38 | 77.75 | 208-240 | 3000 | 13 | 46.5 |
| | PH2-1BG-PT | GLASS | 4/6 | 52.13 | 35.88 | 77.75 | 208-240 | 3000 | 13 | 46.5 |
| | PH2-1BHG-PT | HALF GLASS | 8/6 | 52.13 | 35.88 | 77.75 | 208-240 | 3000 | 13 | 46.5 |

Depth measurement includes handles. For total height, add 3 or 6 inches, based on your mounting choice.

WARMING CABINETS - ROLL-THRU

TEMPERATURE RANGE FROM 80-180° F


| SECTIONS | MODEL # | DOOR TYPE | DOORS | WIDTH | DEPTH | HEIGHT | VOLTS | WATTS | AMPS | CUBIC FEET |
|------------|--------------|-----------|-------|-------|-------|--------|---------|-------|------|------------|
| 1 SECTION | PHI1-1S-PT | SOLID | 2 | 36.5 | 39.88 | 84.38 | 208-240 | 1500 | 6.3 | 33.6 |
| | PHI1XT-1S-PT | | | | | 89.88 | | | | |
| 2 SECTIONS | PHI2-1S-PT | SOLID | 4 | 68.88 | 39.88 | 84.38 | 208-240 | 3000 | 13 | 72.4 |
| | PHI2XT-1S-PT | | | | | 89.88 | | | | |

Depth measurement includes handles.

WARMING CABINETS - ROLL-IN

TEMPERATURE RANGE FROM 80-180° F

| SECTIONS | MODEL # | DOOR TYPE | DOORS | WIDTH | DEPTH | HEIGHT | VOLTS | WATTS | AMPS | CUBIC FEET |
|------------|-----------|-----------|-------|-------|-------|--------|---------|-------|------|------------|
| 1 SECTION | PHI1-1S | SOLID | 1 | 36.5 | 36.13 | 84.38 | 208-240 | 1500 | 6.3 | 33.6 |
| | PHI1XT-1S | | | | | 89.88 | | | | |
| 2 SECTIONS | PHI2-1S | SOLID | 2 | 68.88 | 36.13 | 84.38 | 208-240 | 3000 | 13 | 72.4 |
| | PHI2XT-1S | | | | | 89.88 | | | | |

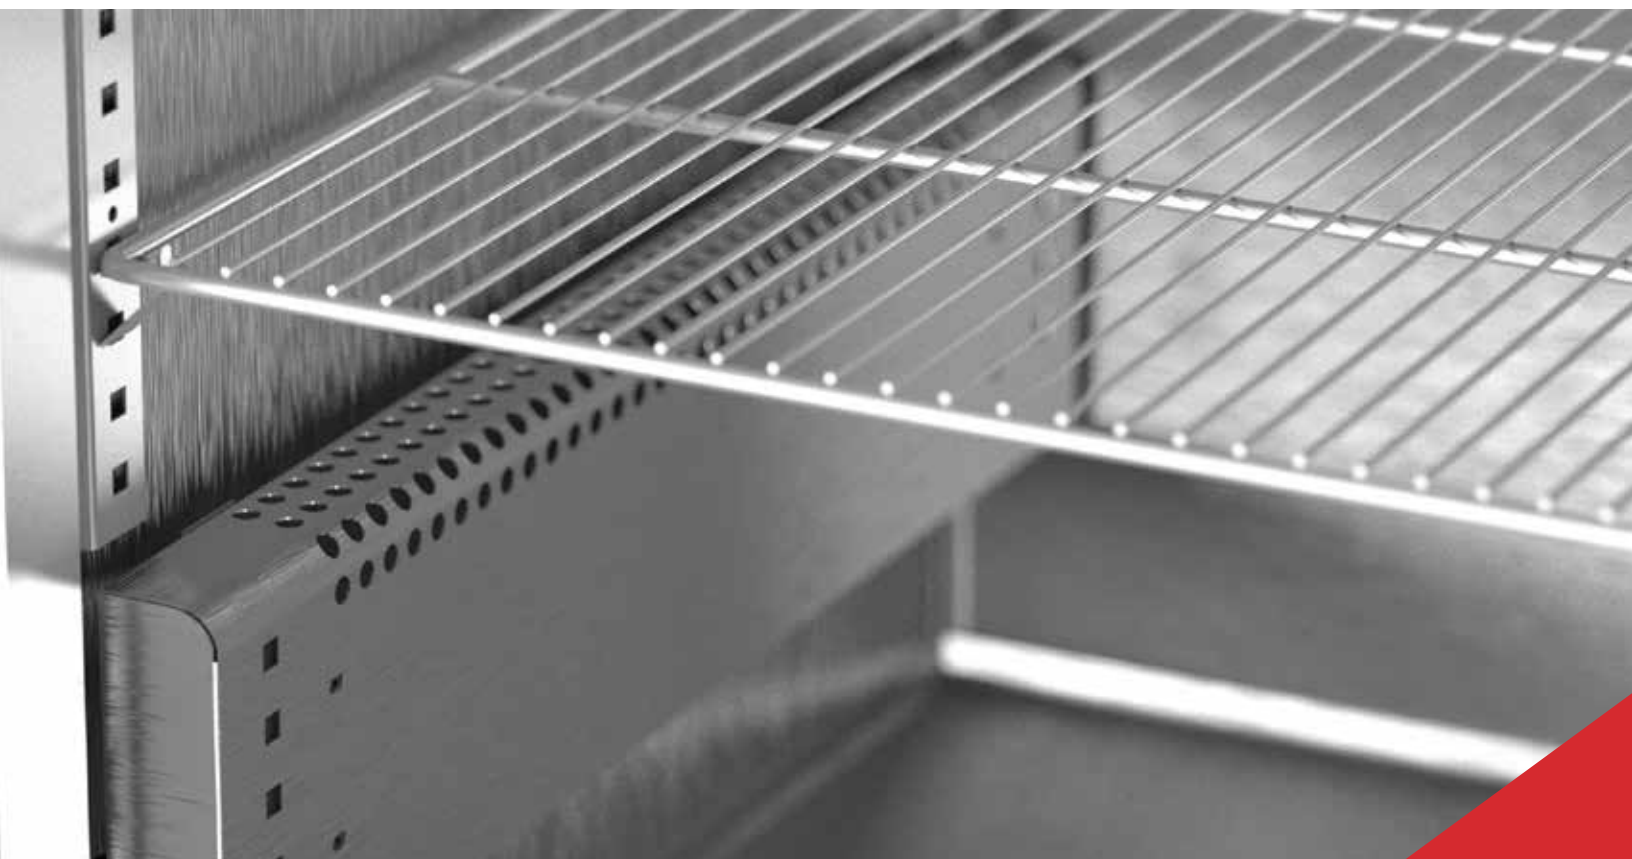Depth measurement includes handles.

Warming Cabinet Accessories


| DESCRIPTION | UNIT(S) | PART NUMBER |
|---------------------------------------|--|--------------------|
| SHELVING / ORGANIZERS | | |
| Epoxy Coated Wire Shelf | H Series Flat Shelving 1 Door Unit | 403-889D-01 |
| Epoxy Coated Wire Shelf | H Series Flat Shelving 2 Door Unit | 403-887D-01 |
| Epoxy Coated Wire Shelf | P Series, 1 section | 50597706 |
| Epoxy Coated Wire Shelf | P Series, 2 section or 3 section (left or right) | 50597806 |
| Epoxy Coated Wire Shelf | P Series, 3 section (center) | 50597906 |
| Shelf Clip | Any H Series Unit | 403-169A |
| Shelf Clip | P Series | 50022601 |
| MOUNTING | | |
| 6" Caster (set of four) | Any H Series Unit | 61C01-001A |
| 3" Caster (set of four) | Any H Series Unit | 61C01-013A |
| 6" Black Leg (set of four) | Any H Series Unit | 58B02-001A |
| 6" Seismic/Flanged Legs (set of four) | Any H Series Unit | 00C31-055A |
| 6" Casters (set of four) | P Series | 0-0140-105S |
| 3" Casters (set of four) | P Series | 0-0140-103S |
| 6" Seismic/Flanged Legs (set of four) | P Series | 00C26-028A |
| ADDITIONAL ACCESSORIES | | |
| Door lock | P Series | 50597111 |




Tray Slides

| DESCRIPTION | UNIT(S) | PART NUMBER |
|-------------|---------|-------------|
|-------------|---------|-------------|

INDIVIDUAL TRAY SLIDES
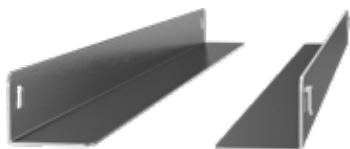
| | | | | |
|--|---|----|----|-----------|
| 1 pair of type "A" tray slides | H-Series / P-Series | | | 10601211S |
|  <p>Pilaster and mounting hardware not included. Contact us for hardware selection.</p> | Bottom support for (1) 18x26" pan, or (2) 14x18" pans | | | |
| | SPACING | 2" | 3" | 4" |
| | Full Door | 26 | 18 | 13 |
| | Half Door | 12 | 8 | 6 |
| | | | | |
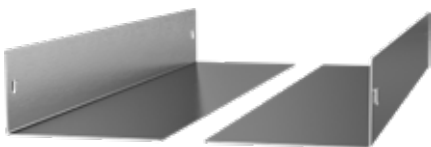
| | | | | |
|---|---|----|----|-----------|
| 1 pair of type "A/C" tray slides | H-Series | | | 10601201S |
|  <p>Pilaster and mounting hardware not included. Contact us for hardware selection.</p> | Bottom support for (1) 18x26" pan, or (2) 14x18" pans, or (2) 12x20" pans | | | |
| | SPACING | 2" | 3" | 4" |
| | Full Door | 26 | 18 | 13 |
| | Half Door | 12 | 8 | 6 |
| | | | | |





GLASS DOOR MERCHANDISERS

CONSISTENT COOLING POWER WITH WELL LIT PRODUCT DISPLAY



Marketeer® Series



MarketMax Series



Countertop Models



Novelty & Dipping Cabinets

MARKETEER® SERIES

Refrigerators



Energy Star rated (select models)

Unique sizing options

**3 year warranty on parts & labor,
5 year warranty on compressor**

Double pane Low-E argon-filled glass doors

LED lighting

creates dynamic product presentation

Refrigerators have electro-mechanical control

Energy efficient and environmentally friendly R290 refrigerant

(except for 1H6 models, which use R600)

Energy Star rated

(select models)

Self-closing hinged doors

with mechanical locks standard (except MT21, MT41)

Sliding glass doors available

on select units

Bottle Coolers now available (MT41)



MECHANICAL LOCKS

standard on all hinged units
(excluding MT21 models)



BUILT-IN LED LIGHTS

for dynamic product presentation

REFRIGERATORS

| SECTIONS | MODEL # | DOOR TYPE | DOORS/SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | COLOR |
|----------------|---------------|-----------|---------------|-------|-------|--------|-------|--------|------|------------|-------|
| 1 DOOR | MT08-1H6B | HINGED | 1/5 | 18.88 | 20.63 | 71.38 | 115 | 1/8 | 1.8 | 7.69 | BLACK |
| | MT08-1H6W | | | | | | | | | | WHITE |
| 1 DOOR | MT10-1B | HINGED | 1/3 | 24.88 | 22.5 | 54.38 | 115 | 1/6 | 3.2 | 9.43 | BLACK |
| | MT10-1W | | | | | | | | | | WHITE |
| 1 DOOR | MT12-1B | HINGED | 1/4 | 24.88 | 22.81 | 63.63 | 115 | 1/6 | 4.1 | 11.5 | BLACK |
| | MT12-1W | | | | | | | | | | WHITE |
| 1 DOOR | MT23-1B | HINGED | 1/5 | 29.56 | 26.13 | 78.63 | 115 | 1/3 | 7 | 19.2 | BLACK |
| | MT23-1W | | | | | | | | | | WHITE |
| 2 CURVED DOORS | MT21-1B | HINGED | 2/10 | 36.13 | 24.5 | 57.5 | 115 | 1/3 | 3.6 | 16.8 | BLACK |
| | MT21-1W | | | | | | | | | | WHITE |
| 2 DOORS | MT34-1B | HINGED | 2/10 | 39.5 | 27.5 | 79 | 115 | 1/3 | 7.6 | 26.12 | BLACK |
| | MT34-1W | | | | | | | | | | WHITE |
| 2 DOORS | MT41-48-1-SDB | SLIDING | 2/6 | 47.25 | 21.75 | 48.13 | 115 | 1/4 | 3.1 | 16.4 | BLACK |
| 2 DOORS | MT41-54-1-SDB | SLIDING | 2/6 | 47.25 | 21.75 | 54.13 | 115 | 1/4 | 3.1 | 19.5 | BLACK |
| 2 DOORS | MT49-1B | HINGED | 2/10 | 47.13 | 30.13 | 79 | 115 | 1/2 | 8.3 | 37.42 | BLACK |
| | MT49-1W | | | | | | | | | | WHITE |
| | MT49-1-SDB | SLIDING | 2/10 | 47.13 | 30.13 | 78.63 | 115 | 1/2 | 8.3 | 39.03 | BLACK |
| | MT49-1-SDW * | | | | | | | | | | WHITE |
| 2 DOORS | MT53-1B | HINGED | 2/10 | 54.25 | 29.38 | 79 | 115 | 1/2 | 8.3 | 41.66 | BLACK |
| | MT53-1W | | | | | | | | | | WHITE |
| | MT53-1-SDB | SLIDING | 2/10 | 54.25 | 29.38 | 78.63 | 115 | 1/2 | 8.7 | 41.66 | BLACK |
| | MT53-1-SDW * | | | | | | | | | | WHITE |
| 3 DOORS | MT72-1B | HINGED | 3/12 | 78.75 | 33.63 | 79.38 | 115 | 2X 1/2 | 13.6 | 66.3 | BLACK |

* Sliding glass doors and door frames are black on black exterior and white exterior units. / Depth measurement includes handles.

EXTERIOR FINISHES

- Black

INTERIOR FINISHES

- White

AVAILABLE ACCESSORIES

- Visislide shelving kit
- Extra shelves & clips
- 3" Casters
- 2" Leveling Legs

AVAILABLE DOORS

- Hinged
- Sliding door

AGENCY CERTIFICATIONS



MARKETMAX® SERIES

Refrigerators & Freezers



Energy efficient R290 provides solution for all environmental concerns

Designed to perform in high ambient conditions

Made in USA



Double pane, lowE argon-filled glass doors

Freezers have triple pane

Field-reversible (refrigerator only)

Requires additional hardware kit

Self-closing doors

120° stay open feature

LED lighting

creates dynamic product presentation

Brightly lit sign panel

Custom door decals and signage available

Full electronic temperature control

Energy efficient and environmentally friendly R290 refrigerant

5 epoxy coated wire shelves per section


1, 2 & 3 door model options available

Sliding glass doors available on select units

7 year warranty on parts, labor, and compressor

AVAILABLE DOORS

- Hinged
- Sliding door

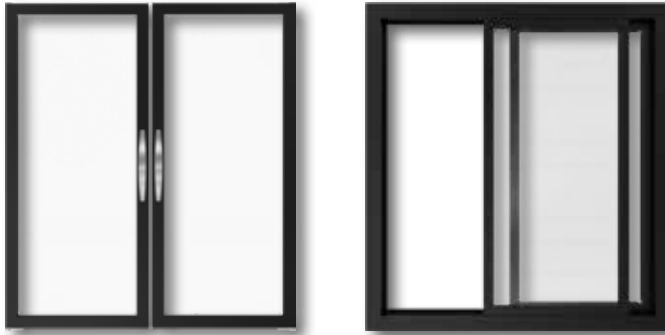**EXTERIOR FINISHES**

- Black
- White
- Stainless steel

INTERIOR FINISHES

- Black
- White
- Stainless steel

AVAILABLE OPTIONS

- Left hinge doors
- Remote models available
- Header signs

AVAILABLE ACCESSORIES

- Electronic locks
- Dual-temp models
- Wine models
- Door locks
- Gravity-Flo kits
- Price-tag molding
- Custom graphics
- Field-reversible door kit (refrigerators only)

MOUNTING OPTIONS

- 6" casters
- 6" legs
- 3" casters

AGENCY CERTIFICATIONS

FULL ELECTRONIC CONTROL
with easy to read digital display



BRIGHTLY LIT HEADER PANEL
to grab attention and increase sales

1, 2, AND 3 SECTION MODELS AVAILABLE

MARKETMAX®

REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # BLACK | MODEL # WHITE | DOOR TYPE | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET |
|----------|------------------|------------------|---|-------------------|-------|-------|--------|-------|-----|------|---------------|
| 1 | MMR12HC-1-B | MMR12HC-1-W | HINGED | 1/4 | 24.13 | 25.75 | 62 | 115 | 1/6 | 2 | 12.06 |
| 1 | MMR19HC-1-B | MMR19HC-1-W | HINGED | 1/5 | 27.25 | 27.5 | 78 | 115 | 1/4 | 3 | 17.87 |
| 1 | MMR23HC-1-B | MMR23HC-1-W | HINGED | 1/5 | 27 | 33.63 | 78 | 115 | 1/4 | 3 | 23.1 |
| 1 | MMR27HC-1-B | MMR27HC-1-W | HINGED | 1/5 | 30 | 33.63 | 78 | 115 | 1/4 | 3 | 25.88 |
| 2 | MMR35HC-1-B | MMR35HC-1-W | HINGED | 2/10 | 39.5 | 33.5 | 78 | 115 | 1/4 | 2.4 | 36.87 |
| 2 | MMR38HC-1-B | MMR38HC-1-W | SLIDING | 2/10 | 43.5 | 32.25 | 78 | 115 | 1/3 | 5.4 | 35.37 |
| 2 | MMR44HC-1-B | MMR44HC-1-W | HINGED | 2/10 | 47 | 33.63 | 78 | 115 | 1/3 | 5.4 | 40.2 |
| 2 | MMR45HC-1-B | MMR45HC-1-W | SLIDING | 2/10 | 52 | 32.25 | 78 | 115 | 1/3 | 5.4 | 44 |
| 2 | MMR49HC-1-B | MMR49HC-1-W | HINGED | 2/10 | 52 | 33.63 | 78 | 115 | 1/3 | 5.4 | 46.15 |
| 2 | MMR49HC-1-B-PT | - | HINGED PASS-THRU GLASS FRONT SOLID REAR | 4/10 | 52 | 36.5 | 78 | 115 | 1/3 | 3.9 | 48.05 |
| 3 | MMR66HC-1-B | MMR66HC-1-W | SLIDING | 3/15 | 75 | 32.25 | 78 | 115 | 1/2 | 6.2 | 64.4 |
| 3 | MMR72HC-1-B | MMR72HC-1-W | HINGED | 3/15 | 75 | 33.63 | 78 | 115 | 1/2 | 6.2 | 68.5 |

Depth measurement includes handles.

FREEZERS

UTILIZES EXPANSION VALVE TECHNOLOGY TO
MAINTAIN TEMPERATURE OF 0° TO -10°F.

| SECTIONS | MODEL # BLACK | MODEL # WHITE | DOOR TYPE | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET |
|----------|------------------|------------------|-----------|-------------------|-------|-------|--------|-------|-------------|------|---------------|
| 1 | MMF12HC-1-B | MMF12HC-1-W | HINGED | 1/4 | 24.13 | 25.75 | 62 | 115 | 1/2 | 5 | 11.9 |
| 1 | MMF19HC-1-B | MMF19HC-1-W | HINGED | 1/5 | 27.25 | 27.5 | 78 | 115 | 3/4 | 7.5 | 17.87 |
| 1 | MMF23HC-1-B | MMF23HC-1-W | HINGED | 1/5 | 27 | 33.63 | 78 | 115 | 3/4 | 7.5 | 22.5 |
| 1 | MMF27HC-1-B | MMF27HC-1-W | HINGED | 1/5 | 30 | 33.63 | 78 | 115 | 3/4 | 7.5 | 26.57 |
| 2 | MMF35HC-1-B | MMF35HC-1-W | HINGED | 2/10 | 39.5 | 33.5 | 78 | 115 | 3/4 | 11 | 36.87 |
| 2 | MMF44HC-1-B | MMF44HC-1-W | HINGED | 2/10 | 47 | 33.63 | 78 | 115 | 3/4 | 11 | 44 |
| 2 | MMF49HC-1-B | MMF49HC-1-W | HINGED | 2/10 | 52 | 33.63 | 78 | 115 | 3/4 | 11 | 46.2 |
| 3 | MMF72HC-1-B | MMF72HC-1-W | HINGED | 3/15 | 75 | 33.63 | 78 | 230* | 3/4 (X2) | 14 | 68.5 |

*Freezers powered by 115/208-230 volts are designed for field wiring
(requires 4-wire electrical circuit, hard-wired).

Depth measurement includes handles.

DUAL-TEMPS

MAINTAINS PRODUCT TEMPERATURES OF
36-38°F (REFRIGERATOR), AND -10°F (FREEZER).

| SECTIONS | MODEL # | DOOR TYPE | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | COLOR |
|----------|-----------------|-----------|-------------------|-------|-------|--------|----------|------------------|------------------|----------------------|-------|
| 2 | MMRF49HC-1-A-BW | HINGED | 2/10 | 52 | 33.63 | 78 | 115 (X2) | R: 1/4 F: 3/4 | R: 2.4 F: 7.5 | R: 21.01 F: 21.01 | BLACK |
| | MMRF49HC-1-A-WW | | | | | | | | | | WHITE |
| 2 | MMRR49HC-1-A-BW | HINGED | 2/10 | 52 | 33.63 | 78 | 115 (X2) | R: 1/4 R: 1/4 | R: 2.4 R: 2.4 | R: 21.01 R: 21.01 | BLACK |
| | MMRR49HC-1-A-WW | | | | | | | | | | WHITE |
| 3 | MMRF72HC-1-B-BW | HINGED | 3/15 | 75 | 33.63 | 78 | 115 (X2) | R: 1/4 F: 1 | R: 2.4 F: 11 | R: 19.62 F: 44.85 | BLACK |
| | MMRF72HC-1-B-WW | | | | | | | | | | WHITE |
| 3 | MMRR72HC-1-B-BW | HINGED | 3/15 | 75 | 33.63 | 78 | 115 (X2) | R: 1/4 R: 1/4 | R: 2.4 R: 2.4 | R: 19.62 R: 44.85 | BLACK |
| | MMRR72HC-1-B-WW | | | | | | | | | | WHITE |

*Freezers powered by 115/208-230 volts are designed for field wiring (requires 4-wire electrical circuit, hard-wired).

Depth measurement includes handles.

All options for MarketMax Dual Temps are specified within the model number using the designated codes described below.

MMRF49HC EXAMPLE

Customer orders a MMRF49HC-1-A-BW

- Exterior will be black. Interior of the freezer AND the refrigerator will be white. (BW)
- The refrigerator will be on the LEFT with Left hinged door. The freezer will be on the RIGHT with Right hinged door. (RF)

MM (RF, FR) 49 - COOLER CONFIGURATIONS

SINGLE DOOR ON LEFT - SINGLE DOOR ON RIGHT

| | |
|----|---|
| FR | Freezer on the Left with Left Hinged Door, Refrigerator on the Right with Right Hinged Door |
| RF | Refrigerator on the Left with Left Hinged Door, Freezer on the Right with Right Hinged Door |
| RR | One Refrigerator on the Left, second Refrigerator on Right |

SPECIAL DOOR OPENINGS - ADD NUMBER TO END OF MODEL NUMBER

| | |
|------|------------------------|
| -18 | All Left Hinged Doors |
| -015 | All Right Hinged Doors |

COLOR COMBINATIONS

(BOTH CABINET INTERIORS BEING THE SAME COLOR)

| | |
|----|---|
| BW | Black Exterior / White Interior |
| WW | White Exterior / White Interior |
| SW | Stainless Exterior / White Interior |
| BB | Black Exterior / Black Interior |
| BS | Black Exterior / Stainless Interior |
| WB | White Exterior / Black Interior |
| WS | White Exterior / Stainless Interior |
| SS | Stainless Exterior / Stainless Interior |
| SB | Stainless Exterior / Black Interior |

MMRF72 EXAMPLE

Customer orders a MMRF72HC-1-B-WW

- Exterior will be white. Interior of the freezer AND the refrigerators will also be white. (WW)
- The refrigerator will be on the left and freezer will be on the right (RF)
- Single section on the left, and double section on the right (B)

MM (RF, FR) 72 - COOLER CONFIGURATIONS

Refrigerator/Freezer Location

| | |
|----|--|
| FR | Freezer on the Left, Refrigerator on the right |
| RF | Refrigerator on the Left, Freezer on the right |
| RR | One Refrigerator on the Left, second Refrigerator on Right |

Door Configuration

| | |
|---|---|
| B | Single section on left, Double section on right |
| C | Double section on left, Single section on right |

B DOOR OPENINGS - ADD NUMBER TO END OF MODEL NUMBER

| | |
|------|---|
| | Standard - Single section on the Left with Left Hinged Door, 2 Door Section on the Right with Left/Right Hinged Doors |
| -282 | Single section on the Left with Left Hinged Door, 2 Door Section on the Right with 2 Right Hinged Doors |
| -18 | Single section on the Left with Left Hinged Door, 2 Door Section on the Right with 2 Left Hinged Doors |
| -015 | Single section on the Left with Right Hinged Door, 2 Door Section on the Right with 2 Right Hinged Doors |

C DOOR OPENINGS - ADD NUMBER TO END OF MODEL NUMBER

| | |
|------|---|
| | Standard - 2 Door Section on the Left with Left/Right Hinged Doors, Single Door Section on the Right with Right Hinged Door |
| -18 | 2 Door Section on the Left with 2 Left Hinged Doors, Single Door Section on the Right with Left Hinged Door |
| -015 | 2 Door Section on the Left with 2 Right Hinged Doors, Single Door Section on the Right with Right Hinged Door |
| -103 | 2 Door Section on the Left with 2 Left Hinged Doors, Single Door Section on the Right with Right Hinged Door |

MARKETMAX® IQ

Merchandisers with **Electronic Smart Lock Feature**



**Keeps unattended merchandisers
secure in your micro-market**

**Designed to perform in
high ambient conditions**

Made in USA

Sleek design

NAMA certified, UL & NSF compliant

**Secures temperature-sensitive
products for worry-free operation**

**Automatically locks when power loss
or temperature drop is sensed**

Unlocks automatically if outage is less than 30 minutes

LED indicator to quickly view status

Flashes to indicate if protection event occurs

Easy-access test switch for health inspectors

**Built-in safety feature allows escape in case of
accidental lock-in**

Optional features such as remote monitoring, fault alerts, and remote unlocking can be added using FreshTraq.com



**Detects power loss or
temperature failure,
and automatically
locks the unit.**

REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DOOR TYPE | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | COLOR |
|----------|----------------|-----------|-------------------|---------|-------|--------|-------|-----|------|---------------|-------|
| 1 | MMR12HC-1-B-IQ | HINGED | 1/4 | 24.125* | 25.75 | 62 | 115 | 1/6 | 2 | 12.06 | BLACK |
| | MMR12HC-1-W-IQ | | | | | | | | | | WHITE |
| 1 | MMR23HC-1-B-IQ | HINGED | 1/5 | 27* | 33.63 | 78 | 115 | 1/4 | 3 | 23.1 | BLACK |
| | MMR23HC-1-W-IQ | | | | | | | | | | WHITE |
| 1 | MMR27HC-1-B-IQ | HINGED | 1/5 | 30* | 33.63 | 78 | 115 | 1/4 | 3 | 25.88 | BLACK |
| | MMR27HC-1-W-IQ | | | | | | | | | | WHITE |
| 2 | MMR44HC-1-B-IQ | HINGED | 2/10 | 47 | 33.63 | 78 | 115 | 1/3 | 5.4 | 40.2 | BLACK |
| | MMR44HC-1-W-IQ | | | | | | | | | | WHITE |
| 2 | MMR49HC-1-B-IQ | HINGED | 2/10 | 52 | 33.63 | 78 | 115 | 1/3 | 5.4 | 46.15 | BLACK |
| | MMR49HC-1-W-IQ | | | | | | | | | | WHITE |

*The IQ locks on single door units are external and will add 1 inch to the overall width shown above.

Depth measurement includes handles.

FREEZERS

UTILIZES EXPANSION VALVE TECHNOLOGY TO MAINTAIN TEMPERATURE OF 0° TO -10°F.

| SECTIONS | MODEL # | DOOR TYPE | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | COLOR |
|----------|----------------|-----------|-------------------|---------|-------|--------|-------|-----|------|---------------|-------|
| 1 | MMF12HC-1-B-IQ | HINGED | 1/4 | 24.125* | 25.75 | 62 | 115 | 1/2 | 5 | 11.9 | BLACK |
| | MMF12HC-1-W-IQ | | | | | | | | | | WHITE |
| 1 | MMF23HC-1-B-IQ | HINGED | 1/5 | 27* | 33.63 | 78 | 115 | 3/4 | 7.5 | 22.5 | BLACK |
| | MMF23HC-1-W-IQ | | | | | | | | | | WHITE |
| 1 | MMF27HC-1-B-IQ | HINGED | 1/5 | 30* | 33.63 | 78 | 115 | 3/4 | 7.5 | 26.57 | BLACK |
| | MMF27HC-1-W-IQ | | | | | | | | | | WHITE |
| 2 | MMF44HC-1-B-IQ | HINGED | 2/10 | 47 | 33.63 | 78 | 115 | 3/4 | 11 | 44 | BLACK |
| | MMF44HC-1-W-IQ | | | | | | | | | | WHITE |
| 2 | MMF49HC-1-B-IQ | HINGED | 2/10 | 52 | 33.63 | 78 | 115 | 3/4 | 11 | 46.2 | BLACK |
| | MMF49HC-1-W-IQ | | | | | | | | | | WHITE |

*The IQ locks on single door units are external and will add 1 inch to the overall width shown above.

Depth measurement includes handles.

AVAILABLE DOORS

- Hinged
- Sliding door

EXTERIOR FINISHES

- Black
- White
- Stainless steel

INTERIOR FINISHES

- Black
- White
- Stainless steel

AVAILABLE OPTIONS

- Remote models available
- Header signs

AVAILABLE ACCESSORIES

- Electronic locks
- Dual-temp models
- Wine models
- Gravity-Flo kits
- Price-tag molding
- Custom graphics

MOUNTING OPTIONS

- 6" casters
- 6" legs
- 3" casters

AGENCY CERTIFICATIONS



MARKETMAX[®] WINE UNITS

standard MarketMax wine unit comes with standard doorlocks, wine thermostat, and five standard epoxy shelves




MarketMax wine unit with upgrades



The MarketMax wine units have the same great MarketMax features, with wine-specific options to create the ultimate wine merchandiser.

SHELVING UPGRADES

We offer curved and flat wine racks, designed to secure the bottles while keeping them prominently on display. Available in white, black, and chrome finish.

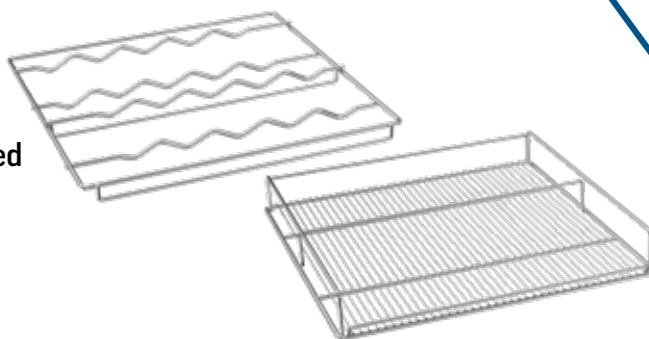

BASE UNIT

WINE OPTION UPGRADES

WINE REFRIGERATORS



SHELVING



SIGNAGE



| UNIT MODEL # (BLACK EXTERIOR - B) | W | D | H | FLAT RACK | CURVED SHELF | | |
|--------------------------------------|----|-------|----|-----------|--------------|--------------|--------------|
| MMR23HC-1-B-WINE | 27 | 33.63 | 78 | 403-933D | 412-076D | 409-418C-065 | 409-418C-064 |
| MMR27HC-1-B-WINE | 30 | 33.63 | 78 | 403-934D | 412-078D | 409-419C-150 | 409-419C-149 |
| MMR44HC-1-B-WINE | 47 | 33.63 | 78 | 412-070D | 412-074D | 409-421C-080 | 409-421C-079 |
| MMR49HC-1-B-WINE | 52 | 33.63 | 78 | 403-936D | 412-077D | 409-422C-121 | 409-422C-120 |
| MMR72HC-1-B-WINE | 75 | 33.63 | 78 | 412-071D | 412-073D | 409-423C-070 | 409-423C-069 |

Depth measurement includes handles.

DUAL-TEMP WINE REFRIGERATORS

Add your shelf color choice to the end of the shelf model #
-01 for white; -02 for black; -04 for chrome finish
example: 412-078D-04

SHELVING



SIGNAGE



| UNIT MODEL # | W | D | H | FLAT RACK | CURVED SHELF | | |
|----------------------|----|-------|----|--|--|--------------|--------------|
| MMRR49HC-1-A-BW-WINE | 52 | 33.63 | 78 | 412-072D | 412-075D | 409-422C-121 | 409-422C-120 |
| MMRR72HC-1-B-BW-WINE | 75 | 33.63 | 78 | 412-071D (double section) 412-070D (single section) | 412-073D (double section) 412-074D (single section) | 409-423C-070 | 409-423C-069 |

Depth measurement includes handles.

Add your shelf color choice to the end of the shelf model #
-01 for white; -02 for black; -04 for chrome finish
example: 412-075D-01

CONTROLLER

Easily programmed to keep unit and its contents at the necessary set point for red or white wines. (between 35-62° F)



FINISHES

MarketMax exterior is standard black with optional white or stainless steel.

MarketMax interior is standard white with optional black or stainless steel.



COUNTERTOPS

Refrigerators & Freezers



CT96 Refrigerator

Double pane, tempered glass door with locks

Heavy-duty black textured steel exterior
with black plastic door frames

Heavy-duty white epoxy coated steel interior

LED lighting
creates dynamic product presentation

3 epoxy coated shelves
top 2 shelves are adjustable

Full electronic temperature control with display

Refrigeration system uses R600a refrigerant
to comply with all environmental concerns

System is serviceable from the rear

Custom graphics available

1 year parts & labor warranty

AGENCY CERTIFICATIONS



REFRIGERATORS

| MODEL # | DOORS/ SHELVES | VOLTS | HP | AMPS | CUBIC FEET | WIDTH | DEPTH | HEIGHT | EXTERIOR COLOR | INTERIOR COLOR |
|------------|-------------------|-------|-----|------|---------------|-------|-------|--------|-------------------|-------------------|
| CT96HC-1-B | 1/3 | 115 | 1/5 | 1.3 | 5.9 | 21.38 | 25.5 | 37.5 | BLACK | WHITE |

Depth measurement includes handles. Height measurement includes mounting height.



CF3 Freezer

Triple pane, tempered glass door

Pre-painted, steel interior and exterior
for easy cleaning

LED lighting
creates dynamic product presentation

2 shelves standard
one full & one half shelf

Custom graphics available

AGENCY CERTIFICATIONS



2" leveling legs

with up to 1" for leveling of the unit

Refrigeration system
uses R290 refrigerant
to comply with all environmental concerns

1 year parts & labor warranty



UCF20 Freezer

Glass door provides clear
merchandising of ice cream

Oversized refrigeration system holds
-15°F product temperature

Full electronic control
for enhanced defrost



AGENCY CERTIFICATIONS



Forced air design does not require
unit to undergo manual defrost

which is a major advantage to
comparable cold wall freezers

20" footprint for countertop
or undercounter applications

7 year warranty on parts,
labor, and compressor

FREEZERS

| MODEL # | DOORS/ SHELVES | VOLTS | HP | AMPS | CUBIC FEET | WIDTH | DEPTH | HEIGHT | COLOR | OPERATING TEMPERATURE |
|---------------|-------------------|-------|-----|------|---------------|-------|-------|--------|-----------|--------------------------|
| CF3HC-1-W | 1/2 | 115 | 1/4 | 4 | 4 | 23.75 | 22.5 | 28.5 | WHITE | -10° F |
| UCF20HC-25-15 | 1/2 | 115 | 1/2 | 3.65 | 2.25 | 20 | 24.5 | 31.13 | STAINLESS | -10 to -15° F |

Depth measurement includes handles.

Energy efficient refrigerant provides solution for all environmental concerns
Designed to perform in high ambient conditions

DIPPING CABINETS



R290 refrigerant provides low energy consumption and is environmentally friendly

3 year warranty on parts & labor, 5 year warranty on compressor

Galvanized metal cabinet
with powder coated painted surface

Easy-to-clean interior

Full electronic control

Sliding glass lids are LowE tempered

Lock and keys standard

2" Heavy-duty casters
allow easy and fast movement

Drain plug for easy cleaning

Lexan sneeze guard

Heavy-duty PVC coated wire support racks
allows containers to be placed on top level for optimal storage

Each rack designed to hold
multiple 3-gallon ice cream containers

R290 refrigerant provides low energy consumption and is environmentally friendly



LID LOCKS STANDARD
for loss prevention



LED LIGHTING
for dynamic product presentation

DIPPING CABINETSCOLD WALL SYSTEM MAINTAINS
TEMPERATURES OF 0 to -10°F.

| MODEL # | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | COLOR |
|------------------|-------------|-------------|-----------|-------|-----|------|------------|-------|
| BDC-HC-8 | 50.4 | 26.4 | 52 | 120 | 1/3 | 5.4 | 15.2 | White |
| BDC-HC-12 | 68.2 | 26.4 | 52 | 120 | 1/3 | 5.2 | 20.9 | White |

*Depth measurement includes handles. For total height, add 2 inches for the caster height.***BDC-HC-8 Capacity**

Top rack: eight 3-gallon ice cream containers
 Bottom rack: six 3-gallon ice cream containers

BDC-HC-12 Capacity

Top rack: twelve 3-gallon ice cream containers
 Bottom rack: ten 3-gallon ice cream containers

**EXTERIOR FINISHES**

- White

INTERIOR FINISHES

- White

ACCESS OPTIONS

- Glass lids

MOUNTING OPTIONS

- 2" casters (standard)

AVAILABLE ACCESSORIES

- Custom graphics

AGENCY CERTIFICATIONS

NOVELTY CASES



R290 refrigerant provides low energy consumption and is environmentally friendly

3 year warranty on parts & labor, 5 year warranty on compressor

White coated steel exterior

White powder coated surface interior

R290 refrigerant provides low energy consumption

LED lighting

Adjustable thermostat

Operating temperature of -10°F

Angle top design with LowE tempered glass lids

Lids are easily removable

Lid lock & keys

Round exterior edges

Integrated tag molding

2" heavy duty casters

Drain plug for easy cleaning

Removable baskets



LID LOCKS STANDARD

for loss prevention



LED LIGHTING

for dynamic product presentation

NOVELTY CASES

MAINTAINS TEMPERATURES OF -10°F.

| MODEL # | LIDS / BASKETS | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | COLOR |
|------------|----------------|-------|-------|--------|-------|-----|------|------------|-------|
| NC28HC-1-W | 2/2 | 28.1 | 26.4 | 32.2 | 115 | 1/5 | 3 | 4.31 | White |
| NC34HC-1-W | 2/3 | 34.1 | 26.4 | 32.2 | 115 | 1/4 | 3 | 5.67 | White |
| NC43HC-1-W | 2/4 | 42.7 | 26.4 | 32.2 | 115 | 1/4 | 3.5 | 7.63 | White |
| NC51HC-1-W | 2/5 | 50.6 | 26.4 | 32.2 | 115 | 1/4 | 3.5 | 9.43 | White |
| NC60HC-1-W | 2/6 | 60.4 | 26.4 | 34.2 | 115 | 1/3 | 4 | 11.66 | White |
| NC68HC-1-W | 2/7 | 68.3 | 26.4 | 34.2 | 115 | 1/3 | 4 | 21 | White |

Depth measurement includes handles. For total height, add 2 inches for the caster height.

**EXTERIOR FINISHES**

- White

INTERIOR FINISHES

- White

ACCESS OPTIONS

- Glass lids

MOUNTING OPTIONS

- 2" casters (standard)

AVAILABLE ACCESSORIES

- Custom graphics
- Dip well

AGENCY CERTIFICATIONS

Glass Door Merchandiser Accessories

| DESCRIPTION | UNIT(S) | PART NUMBER |
|--|------------------------------|--|
| SHELVING / ORGANIZERS | | |
| Epoxy Coated Wire Shelf | MMR/MMF23 | 403-900D-01 |
| Epoxy Coated Wire Shelf | MMR/MMF27 | 403-871D-01 |
| Epoxy Coated Wire Shelf | MMR/MMF49 | 403-873D-01 |
| Epoxy Coated Wire Shelf | MMR/MMF72 | 403-874D-01 |
| Epoxy Coated Wire Shelf, Black | MMR/MMF23 | 403-900D-03 |
| Epoxy Coated Wire Shelf, Black | MMR/MMF27 | 403-871D-03 |
| Epoxy Coated Wire Shelf, Black | MMR/MMF49 | 403-873D-03 |
| Epoxy Coated Wire Shelf, Black | MMR/MMF72 | 403-874D-03 |
| Wire Shelf | CT96 | CT9652 |
| FLAT Wine Rack | MMR23 | 403-933D |
| FLAT Wine Rack | MMR27 | 403-934D |
| FLAT Wine Rack | MMR44 | 412-070D |
| FLAT Wine Rack | MMR49 | 403-936D |
| FLAT Wine Rack | MMR72 | 412-071D |
| FLAT Wine Rack | MMRR49 | 412-072D |
| FLAT Wine Rack | MMRR72 | 412-071D (double section) 412-070D (single section) |
| CURVED Wine Rack | MMR23 | 412-076D |
| CURVED Wine Rack | MMR27 | 412-078D |
| CURVED Wine Rack | MMR44 | 412-074D |
| CURVED Wine Rack | MMR49 | 412-077D |
| CURVED Wine Rack | MMR72 | 412-073D |
| CURVED Wine Rack | MMRR49 | 412-072D |
| CURVED Wine Rack | MMRR72 | 412-073D (double section) 412-074D (single section) |
| Shelf Clip | MMR/MMF Series | 403-169A |
| Shelf Clip | CT96 | CT9651 |
| Gravity Flo Kits (5 shelves for 1 section) | MM23 | 61C31-253D-01 |
| Gravity Flo Kits (5 shelves for 1 section) | MM27 | 61C31-193A-01 |
| Gravity Flo Kits (5 shelves for 1 section) | MM44 | 61C31-201A-01 (order 2) |
| Gravity Flo Kits (5 shelves for 1 section) | MM49/72 | 61C31-199A-01 order 2 for MM49 order 3 for MM72 |
| MOUNTING | | |
| 3" Casters | MT Series (set of four) | 61C01-011A |
| 2" Leveling Feet | MT Series (set of four) | 2016557 |
| 6" Seismic/Flanged Legs | MMR/MMF Series (set of four) | 00C31-055A |
| ADDITIONAL ACCESSORIES | | |
| Door Lock | CT96 | 61C11S043A |

Designate shelf color by adding one of these to the part number:

- 01 White
- 02 Black
- 04 Chrome Finish

ex. 412-078D-02

| DESCRIPTION | UNIT(S) | PART NUMBER |
|-------------------------------|------------------------|----------------------|
| SIGNAGE | | |
| Price Tag Molding (per shelf) | MMR/F 23, 45/49, 66/72 | 61A32-082D-01 |
| Price Tag Molding (per shelf) | MMR/F 27 | 61A32-090D-02 |
| Price tag strips (5 p/kit) | MT08-1H6 | 2039785 |
| Price tag strips (5 p/kit) | MT10-1 | 2039789 |
| Price tag strips (5 p/kit) | MT23-1 | 2039787 |
| Price tag strips (10 p/kit) | MT34-1 | 2082716 |
| Price tag strips (10 p/kit) | MT49-1 | 2082715 |
| Price tag strips (5 p/kit) | MT53-1 | 2030792 |
| Brushed sign 26-3/8" x 8.5" | MMR23/MMF23 | 409-505B-01 |
| Brushed sign 29 1/8" x 8.5" | MMR27/MMF27 | 409-505B-02 |
| Brushed sign 46.13" W x 8.5" | MMR44/MMF44 | 409-505B-04 |
| Brushed sign 51 1/8" x 8.5" | MMR/MMF49 | 409-505B-05 |
| Brushed sign 74 1/4" x 8.5" | MMR/MMF72 | 409-505B-06 |
| Flat Black Sign | MMR23/MMF23 | 409-488B-01 |
| Flat Black Sign | MMR/MMF27 | 409-488B-02 |
| Flat Black Sign | MMR/MMF49 | 409-488B-05 |
| Flat Black Sign | MMR/MMF72 | 409-488B-06 |
| Flat White Sign | MMR23/MMF23 | 409-418C-053 |
| Flat White Sign | MMR/MMF27 | 409-419C-140 |
| Flat White Sign | MMR/MMF49 | 409-422C-109 |
| Flat White Sign | MMR/MMF72 | 409-423C-061 |
| Self-Serve Sign | MMR23/MMF23 | 409-418C-054 |
| Self-Serve Sign | MMR/MMF27 | 409-419C-141 |
| Self-Serve Sign | MMR/MMF49/MMRF49 | 409-422C-110 |
| Self-Serve Sign | MMR/MMF72/MMRF72 | 409-423C-062 |
| Fresh Foods Sign | MMR23/MMF23 | 409-418C-056 |
| Fresh Foods Sign | MMR/MMF27 | 409-419C-143 |
| Fresh Foods Sign | MMR/MMF49 | 409-422C-112 |
| Fresh Foods Sign | MMR/MMF72 | 409-423C-064 |
| Cold Drinks Sign | MMR23 | 409-418C-055 |
| Cold Drinks Sign | MMR27 | 409-419C-142 |
| Cold Drinks Sign | MMR49 | 409-422C-111 |
| Cold Drinks Sign | MMR72 | 409-423C-063 |
| Chilled Wine Sign - Vineyard | MMR23 | 409-418C-064 |
| Chilled Wine Sign - Vineyard | MMR27 | 409-419C-149 |
| Chilled Wine Sign - Vineyard | MMR44 | 409-421C-079 |
| Chilled Wine Sign - Vineyard | MMR49 | 409-422C-120 |
| Chilled Wine Sign - Vineyard | MMR72 | 409-423C-069 |
| Chilled Wine Sign - Corks | MMR23 | 409-418C-065 |
| Chilled Wine Sign - Corks | MMR27 | 409-419C-150 |
| Chilled Wine Sign - Corks | MMR44 | 409-421C-080 |
| Chilled Wine Sign - Corks | MMR49 | 409-422C-121 |
| Chilled Wine Sign - Corks | MMR72 | 409-423C-070 |
| Got Milk Sign | MMR27 | 409-419C-102 |
| Got Milk Sign | MMR 45/49 | 409-422C-087 |
| Got Milk Sign | MMR 66/72 | 409-423C-054 |



Chilled Wine Sign - Vineyard



Chilled Wine Sign - Corks



OPEN AIR MERCHANDISERS

EASY-ACCESS AND HIGH VISIBILITY PRODUCT DISPLAYS



Breeze™ Series



VueMax™ Series

BREEZE™ SERIES



Unique size suited for endcaps and schools

Custom graphics available

**3 year warranty on parts & labor,
5 year warranty on compressor**

Exterior finish is a heavy-duty steel
with a durable, baked on black or white coating

Curved design with open front & side shield
to maximize product display

Interior is white coated steel

2 recessed interior lights
provide maximum product visibility

3 epoxy coated shelves

Modern grille is easy to remove
for cleaning or service

Gravity-Flo organizer

Holds unit temperature from 32°-40°F

Certified for bottled beverage & packaged foods

Brightly lit sign panel

**Featuring environmentally friendly
energy-efficient R290 refrigerant**



SIDE SHIELD
to maximize product display



GRAVITY-FLO
organizer standard



REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 32-40°F.

| MODEL # | SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | COLOR |
|----------|---------|-------|-------|--------|-------|-----|------|------------|-------|
| BZ13HC-B | 3 | 30 | 32.75 | 54.38 | 115 | 3/4 | 9.1 | 12.63 | BLACK |
| BZ13HC-W | | | | | | | | | WHITE |

Depth measurement includes handles. For total height, add 2 inches for the caster height.



EXTERIOR FINISHES

- Black
- White

INTERIOR FINISHES

- White

AVAILABLE ACCESSORIES

- Black dividers
- Black shelves
- Roller kit
- Custom graphics and signage

AGENCY CERTIFICATIONS



VUEMAX™ SERIES



**Ideal for gourmet shops, delicatessens,
convenience stores & bakeries**

**3 year warranty on parts & labor,
5 year warranty on compressor**

Heavy duty steel exterior

with a durable paint finish

Glass sides enhance product visibility

from side viewpoints

Foamed in place CFC-free polyurethane

insulation enhances the structural strength of the cabinet and increases energy efficiency

LED lighting

enhances product illumination for maximum visibility

Shelving display flexibility

Shelves can be installed in two positions

Full electronic temperature control

from 36° -40°F, with display

Certified for bottled beverage & packaged foods

Night curtain

Stylish impact bumper

**Featuring environmentally friendly
energy-efficient R290 refrigerant**



SIDE SHIELD

to maximize product display



CUSTOM GRAPHICS AVAILABLE

for brand or product promotion

**REGULAR DEPTH**


MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| MODEL # | SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET |
|-----------|---------|-------|-------|--------|-------|---------|------|------------|
| VMHC-7-1 | 3 | 35.5 | 31.75 | 63.88 | 115 | 1/3 | 10 | 9.58 |
| VMHC-12-1 | 5 | 35.13 | 31.75 | 83.13 | 115 | (2) 1/4 | 12 | 15.45 |
| VMHC-18-1 | 5 | 52 | 31.75 | 83.38 | 115 | (2) 1/3 | 12 | 23.87 |

Height measurements include 6 inch legs.**NARROW DEPTH**

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| MODEL # | SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET |
|-----------|---------|-------|-------|--------|-------|---------|------|------------|
| VMHCSL-18 | 5 | 47.3 | 24.38 | 83.5 | 115 | 2 (1/3) | 12 | 23 |

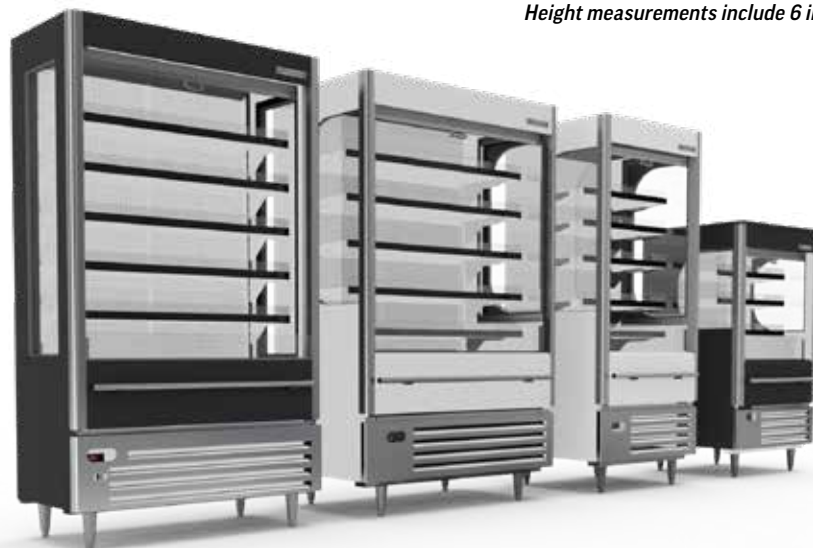Height measurements include 6 inch legs.**EXTERIOR FINISHES**

- Black wrap over stainless steel
- White wrap over stainless steel
- Grey painted stainless steel

INTERIOR FINISHES

- White

AVAILABLE ACCESSORIES

- Lockable Security Cage
- Bar/bag hooks
- Price tag molding
- Clearcool Curtain
- Custom graphics available

MOUNTING OPTIONS

- 6" adjustable legs (standard)
- 5" casters

AGENCY CERTIFICATIONS

Open Air Merchandiser Accessories

| DESCRIPTION | UNIT(S) | PART NUMBER |
|-------------|---------|-------------|
|-------------|---------|-------------|

| SHELVING / ORGANIZERS | | |
|-------------------------|------|-------------|
| Epoxy Coated Wire Shelf | BZ13 | 403-749D-01 |
| Shelf Clip | BZ13 | 403-168A |
| Divider, 20oz | BZ13 | 403-750D-01 |

| MOUNTING | | |
|-----------------------|----------------------|---------------|
| 2" Roller Kit | BZ13 | 61C01-010A |
| 5" Casters (set of 4) | VM7/VM12/VM18/VM18SL | 61C01-014D-01 |

| MERCHANDISING ACCESSORIES | | |
|--|------------------|-----------------------|
| Front Product Display | VM7 / VM12 | 183602102 |
| Front Product Display | VM18 | 183602101 |
| Front Product Display | VM18 Slim | 183602103 |
| Side Saddle Bag Assembly (4 shelves) | VM7 | 183110203 |
| Side Saddle Bag Assembly (7 shelves) | VM18 | 183110202 |
| Clearcool Curtain Assembly, Plastic Strips | VM7 | CLEARCOOL55 |
| Clearcool Curtain Assembly, Plastic Strips | VM12 | CLEARCOOL77 |
| Clearcool Curtain Assembly, Plastic Strips | VM18 | CLEARCOOL120 |
| Wonder Bar Assembly, 48" Saddle Style Black w/6 Pegs | VM7 / VM12 | WonderBar-ALPA-55/77 |
| Wonder Bar Assembly, 48" Saddle Style Black w/6 Pegs | VM18 / VM18 Slim | WonderBar-ALPA-99/120 |

| ADDITIONAL ACCESSORIES | | |
|------------------------|-----------|--------------|
| Locking Cage w/Lock | VM7 | 183629014ASM |
| Locking Cage w/Lock | VM12 | 183629013ASM |
| Locking Cage w/Lock | VM18 | 183629011ASM |
| Locking Cage w/Lock | VM18 Slim | 183629010 |

Front Product Display



Wonder Bar



Product Stop




Casters



Saddle Bag

Available for VM-7 (with 4 shelves), VM-12 (with 7 shelves), and VM-18 (with 7 shelves).

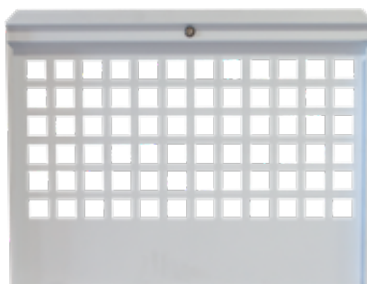

Lockable Security Cage



Clearcool Curtain






DELI CASES

BOLD AND SPACIOUS PRODUCT DISPLAY FOR ANY DELI OR BAKERY



DELI CASES

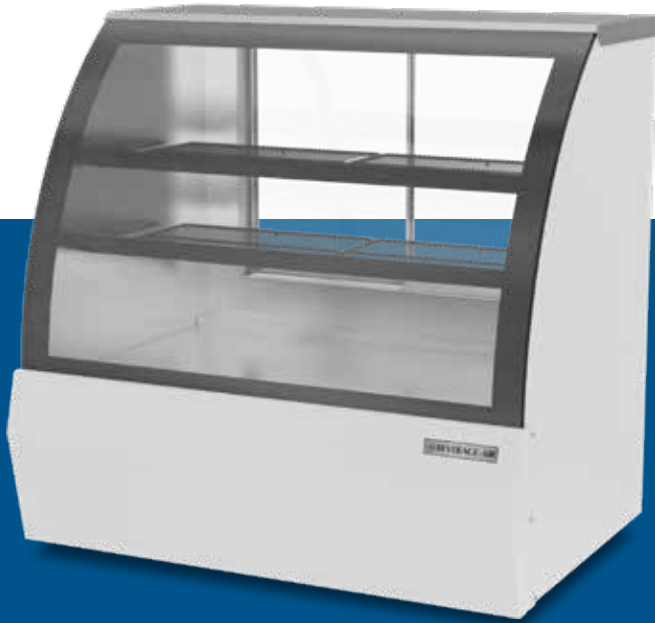

Ideal for gourmet shops, bakeries, delicatessens and convenience stores

**3 year warranty on parts & labor,
5 year warranty on compressor**

Open-food rated

**Sliding rear glass doors,
easily removed for cleaning**

Curved front glass

Full electronic control

LED lighting with on and off switch

Additional electrical outlet for scale

Adjustable shelves for better product display

Price tag molding standard

Powder coated galvanized steel exterior

Stainless steel floor with mirrored interior end caps



ACCESSIBLE OUTLET

Conveniently located for secondary small equipment such as scales.



REMOVABLE SLIDING DOORS

for easy maintenance and cleaning of the unit and doors.

REFRIGERATED UNITS

MAINTAINS PRODUCT TEMPERATURES OF 33-41°F.

| MODEL # | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | COLOR |
|------------|-------|-------|--------|-------|-----|------|------------|-------|
| CDR3HC-1-B | 37.25 | 35.75 | 48.5 | 115 | 1/6 | 4 | 10 | BLACK |
| CDR3HC-1-W | | | | | | | | WHITE |
| CDR4HC-1-B | 49.25 | 35.75 | 48.5 | 115 | 1/6 | 4 | 14 | BLACK |
| CDR4HC-1-W | | | | | | | | WHITE |
| CDR5HC-1-W | 60.25 | 35.75 | 48.5 | 115 | 1/4 | 5 | 17 | BLACK |
| CDR5HC-1-B | | | | | | | | WHITE |
| CDR6HC-1-B | 73.75 | 35.75 | 48.5 | 115 | 1/4 | 5 | 21 | BLACK |
| CDR6HC-1-W | | | | | | | | WHITE |

Depth measurement includes handles. For total height, add 2 inches for the caster height.

DRY CASES (NON-REFRIGERATED)

| MODEL # | WIDTH | DEPTH | HEIGHT | CUBIC FEET | COLOR |
|--------------|-------|-------|--------|------------|-------|
| CDR3HC-1-B-D | 37.25 | 35.75 | 48.5 | 10 | BLACK |
| CDR3HC-1-W-D | | | | | WHITE |
| CDR4HC-1-B-D | 49.25 | 35.75 | 48.5 | 14 | BLACK |
| CDR4HC-1-W-D | | | | | WHITE |
| CDR5HC-1-W-D | 60.25 | 35.75 | 48.5 | 17 | BLACK |
| CDR5HC-1-B-D | | | | | WHITE |
| CDR6HC-1-B-D | 73.75 | 35.75 | 48.5 | 21 | BLACK |
| CDR6HC-1-W-D | | | | | WHITE |

Depth measurement includes handles.
For total height, add 2 inches for the caster height.

EXTERIOR FINISHES

- Black
- White

INTERIOR FINISHES

- Stainless steel floor with mirrored interior end caps

AVAILABLE OPTIONS

- Dry units

MOUNTING OPTIONS

- 2.75" casters
- 3" casters
- 6" casters

AGENCY CERTIFICATIONS





FOOD PREP TABLES

BACK BONE OF FOOD SERVICE WITH ALMOST LIMITLESS OPTIONS



Sandwich Prep



Pizza Prep



Salad Bar



Topping Station

SANDWICH PREP

Food Prep Tables



**Designed to perform in
high ambient conditions**

**7 year warranty on parts,
labor, and compressor**

Made in USA

Full electronic control

Heavy-duty aluminum pan liner

easy to clean and prevents spills from falling into cabinet while also ensuring coldest air flows across bottom of pans

Reversible cutting boards

1/2" thick, 10" deep

Locking divider bars

Field-reversible doors

with 120 degree stay-open feature

Two epoxy coated shelves

per door section standard

Snap-in door gaskets

Accommodates up to 6" deep food service pans

4" deep 1/6 size polycarbonate pans are included

Heavy duty insulated covers

protects products and eliminates sweating when closed


6" heavy duty casters standard

3" casters or 6" leg option available at no charge when specified on order



ACCESS OPTIONS

- Doors
- Drawers
- Dual-sided

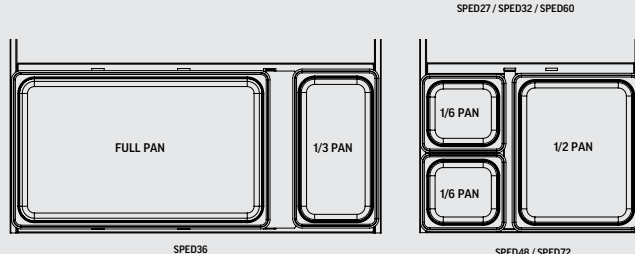DRAWER PAN CONFIGURATIONS
for all SPED units

PERFECT SEAL PAN LINER
ensures airflow under pans and protects bottom of cabinet from pan spills



CLEAR LIDS AVAILABLE
for optimized product display

EXTERIOR FINISHES

- Stainless steel with galvanized back
- Stainless steel with stainless back

INTERIOR FINISHES

- Corrosion-resistant aluminum
- Stainless steel

AVAILABLE OPTIONS

- Left hinge doors
- Remote models available

AVAILABLE ACCESSORIES

- 12" crossbar
- Side/front crumb catchers
- Overshelf kits
- Composite cutting boards
- Bun tray rack
- Locks (for solid doors)

LID OPTIONS

(specify at time of order)

- Clear lids
- Flat-hinged lids
- Lift-off lids
- See-thru lids

MOUNTING OPTIONS

- 6" casters
- 3" casters (allows for ADA compliant working height)
- 6" legs

AGENCY CERTIFICATIONS**AVAILABLE IN STANDARD TOP, MEGA TOP, AND CUTTING TOP****STANDARD TOP**

Two rows of food pans for easy access to ingredients. Perfect for smaller sandwich, salad or back of the house line service

**MEGA TOP**

Three rows of food pans offer 50% more capacity than a standard top prep table. Ideal for users with a wide array of ingredients

**CUT TOP**


An extra deep, 17" cutting board on a standard top unit offers additional workspace for larger item prep, catering or complicated menu items



SANDWICH PREP

AVAILABLE LID CHOICES

(specify at time of order)

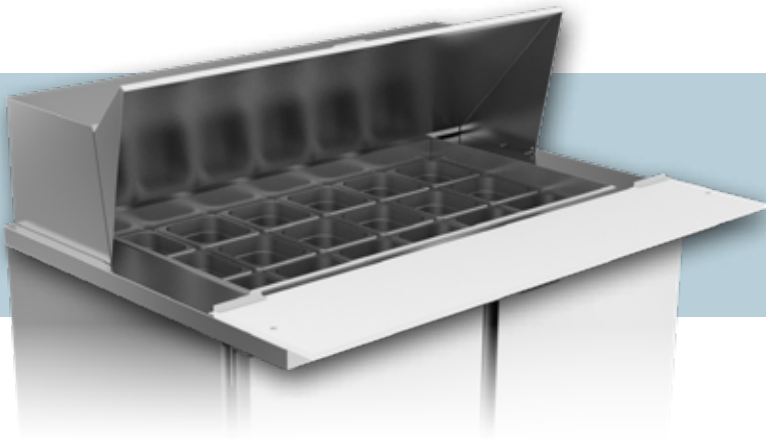

ROLL TOP

The standard lid for our sandwich prep units. A roll top lid allows for easy access and can be closed during non-service periods to allow the refrigeration system to recover.



FLAT-HINGED

Durable lid helps to keep ingredients at food-safe temperature while the hinge locks the lid into place, allowing for easy access to the back row of pans.

SEE-THRU


Full glass, piston driven lid allows for easy view of ingredients and pan fill lines without removing the lid, and can act as a sneeze guard when optioned with a single overshelf and side guards.

**CLEAR**

A polycarbonate option that is ideal for operations that want to showcase their fresh ingredients to customers while keeping a lid on their pan section.

**LIFT-OFF**

Allows for full view of pan section and maximizes full use of work area. The low profile of lift off lids permits the unit to fit under existing shelving or service windows.

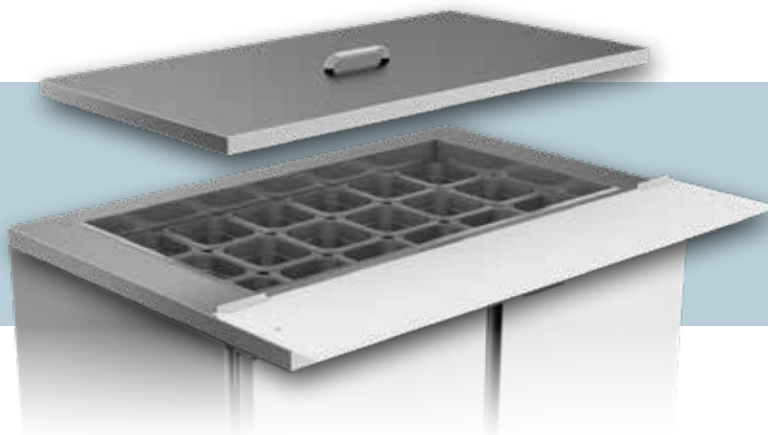

SANDWICH PREP

STANDARD TOP

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DRAWERS | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | STANDARD PANS 4" DEEP |
|----------|---------------|---------|-------------------|-------|-------|--------|-------|-----|------|---------------|-----------------------------|
| 1 | SPE27HC | — | 1/2 | 27 | 32 | 39.25 | 115 | 1/6 | 2 | 6.91 | (6) 1/6 size & (2) 1/9 size |
| | SPED27HC | 2 | — | | | | | | | | |
| 1 | SPE27HC-B | — | 1/2 | 27 | 32 | 39.25 | 115 | 1/6 | 2 | 6.91 | (8) 1/6 size |
| | SPED27HC-B | 2 | — | | | | | | | | |
| 1 | SPE32HC-08 | — | 1/2 | 32 | 32 | 39.25 | 115 | 1/6 | 2 | 8.01 | (8) 1/6 size |
| | SPED32HC-08-2 | 2 | — | | | | | | | | |
| 2 | SPE36HC-08 | — | 2/4 | 36 | 32 | 39.25 | 115 | 1/6 | 2 | 10.01 | (8) 1/6 size |
| | SPED36HC-08-2 | 2 | — | | | | | | | | |
| | SPE36HC-10 | — | 2/4 | 36 | 32 | 39.25 | 115 | 1/6 | 2 | 10.01 | (10) 1/6 size |
| | SPED36HC-10-2 | 2 | — | | | | | | | | |
| 2 | SPE48HC-08 | — | 2/4 | 48 | 32 | 39.25 | 115 | 1/6 | 2.2 | 13.01 | (8) 1/6 size |
| | SPED48HC-08-2 | 2 | 1/2 | | | | | | | | |
| | SPED48HC-08-4 | 4 | — | | | | | | | | |
| | SPE48HC-10 | — | 2/4 | 48 | 32 | 39.25 | 115 | 1/6 | 2.2 | 13.01 | (10) 1/6 size |
| | SPED48HC-10-2 | 2 | 1/2 | | | | | | | | |
| | SPED48HC-10-4 | 4 | — | | | | | | | | |
| | SPE48HC-12 | — | 2/4 | 48 | 32 | 39.25 | 115 | 1/6 | 2.2 | 13.01 | (12) 1/6 size |
| | SPED48HC-12-2 | 2 | 1/2 | | | | | | | | |
| | SPED48HC-12-4 | 4 | — | | | | | | | | |
| 2 | SPE60HC-08 | — | 2/4 | 60 | 32 | 39.25 | 115 | 1/3 | 5.4 | 16.02 | (8) 1/6 size |
| | SPED60HC-08-2 | 2 | 1/2 | | | | | | | | |
| | SPED60HC-08-4 | 4 | — | | | | | | | | |
| | SPE60HC-10 | — | 2/4 | 60 | 32 | 39.25 | 115 | 1/3 | 5.4 | 16.02 | (10) 1/6 size |
| | SPED60HC-10-2 | 2 | 1/2 | | | | | | | | |
| | SPED60HC-10-4 | 4 | — | | | | | | | | |
| | SPE60HC-12 | — | 2/4 | 60 | 32 | 39.25 | 115 | 1/3 | 5.4 | 16.02 | (12) 1/6 size |
| | SPED60HC-12-2 | 2 | 1/2 | | | | | | | | |
| | SPED60HC-12-4 | 4 | — | | | | | | | | |
| | SPE60HC-16 | — | 2/4 | 60 | 32 | 39.25 | 115 | 1/3 | 5.4 | 16.02 | (16) 1/6 size |
| | SPED60HC-16-2 | 2 | 1/2 | | | | | | | | |
| | SPED60HC-16-4 | 4 | — | | | | | | | | |

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles and rear bumpers.

STANDARD TOP

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DRAWERS | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | STANDARD PANS 4" DEEP |
|----------|---------------|---------|-------------------|-------|-------|--------|-------|-----|------|---------------|--------------------------|
| 3 | SPE72HC-08 | — | 3/6 | 72 | 32 | 39.25 | 115 | 1/3 | 5.4 | 20.02 | (8) 1/6 size |
| | SPED72HC-08-2 | 2 | 2/4 | | | | | | | | |
| | SPED72HC-08-4 | 4 | 1/2 | | | | | | | | |
| | SPED72HC-08-6 | 6 | — | | | | | | | | |
| | SPE72HC-10 | — | 3/6 | 72 | 32 | 39.25 | 115 | 1/3 | 5.4 | 20.02 | (10) 1/6 size |
| | SPED72HC-10-2 | 2 | 2/4 | | | | | | | | |
| | SPED72HC-10-4 | 4 | 1/2 | | | | | | | | |
| | SPED72HC-10-6 | 6 | — | | | | | | | | |
| | SPE72HC-12 | — | 3/6 | 72 | 32 | 39.25 | 115 | 1/3 | 5.4 | 20.02 | (12) 1/6 size |
| | SPED72HC-12-2 | 2 | 2/4 | | | | | | | | |
| | SPED72HC-12-4 | 4 | 1/2 | | | | | | | | |
| | SPED72HC-12-6 | 6 | — | | | | | | | | |
| | SPE72HC-18 | — | 3/6 | 72 | 32 | 39.25 | 115 | 1/3 | 5.4 | 20.02 | (18) 1/6 size |
| | SPED72HC-18-2 | 2 | 2/4 | | | | | | | | |
| | SPED72HC-18-4 | 4 | 1/2 | | | | | | | | |
| | SPED72HC-18-6 | 6 | — | | | | | | | | |

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles and rear bumpers.

CONDIMENT STATIONS WITH SNEEZEGUARD

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DRAWERS | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | STANDARD PANS 4" DEEP |
|----------|----------------|---------|-------------------|-------|-------|--------|-------|-----|------|---------------|--------------------------|
| 1 | SPE27HC-SNZ | — | 1/2 | 27 | 32 | 53 | 115 | 1/6 | 2 | 7.3 | (6) 1/6 pans, (2) 1/9 |
| 2 | SPE48HC-12-SNZ | — | 2/4 | 48 | 32 | 53.13 | 115 | 1/6 | 2.2 | 13.9 | (12) 1/6 pans |

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles and rear bumpers.

SANDWICH PREP

MEGA TOP

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DRAWERS | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | STANDARD PANS 4" DEEP |
|----------|----------------|---------|-------------------|-------|-------|--------|-------|-----|------|---------------|-----------------------------|
| 1 | SPE27HC-12M | — | 1/2 | 27 | 38.38 | 42.75 | 115 | 1/6 | 2 | 6.91 | (9) 1/6 size & (3) 1/9 size |
| | SPED27HC-12M | 2 | — | | | | | | | | |
| 1 | SPE27HC-12M-B | — | 1/2 | 27 | 38.5 | 42.75 | 115 | 1/6 | 2 | 6.91 | (12) 1/6 size |
| | SPED27HC-12M-B | 2 | — | | | | | | | | |
| 1 | SPE32HC-12M | — | 1/2 | 32 | 38.38 | 43 | 115 | 1/6 | 2 | 8.01 | (12) 1/6 size |
| | SPED32HC-12M-2 | 2 | — | | | | | | | | |
| 2 | SPE36HC-12M | — | 2/4 | 36 | 38.38 | 43 | 115 | 1/6 | 2 | 10.01 | (12) 1/6 size |
| | SPED36HC-12M-2 | 2 | — | | | | | | | | |
| | SPE36HC-15M | — | 2/4 | 36 | 38.38 | 43 | 115 | 1/6 | 2 | 10.01 | (15) 1/6 size |
| | SPED36HC-15M-2 | 2 | — | | | | | | | | |
| 2 | SPE48HC-12M | — | 2/4 | 48 | 38.38 | 43 | 115 | 1/6 | 2.2 | 13.01 | (12) 1/6 size |
| | SPED48HC-12M-2 | 2 | 1/2 | | | | | | | | |
| | SPED48HC-12M-4 | 4 | — | | | | | | | | |
| | SPE48HC-18M | — | 2/4 | 48 | 38.38 | 43 | 115 | 1/6 | 2.2 | 13.01 | (18) 1/6 size |
| | SPED48HC-18M-2 | 2 | 1/2 | | | | | | | | |
| | SPED48HC-18M-4 | 4 | — | | | | | | | | |
| 2 | SPE60HC-12M | — | 2/4 | 60 | 38.38 | 43 | 115 | 1/3 | 5.4 | 16.02 | (12) 1/6 size |
| | SPED60HC-12M-2 | 2 | 1/2 | | | | | | | | |
| | SPED60HC-12M-4 | 4 | — | | | | | | | | |
| | SPE60HC-18M | — | 2/4 | 60 | 38.38 | 43 | 115 | 1/3 | 5.4 | 16.02 | (18) 1/6 size |
| | SPED60HC-18M-2 | 2 | 1/2 | | | | | | | | |
| | SPED60HC-18M-4 | 4 | — | | | | | | | | |
| | SPE60HC-24M | — | 2/4 | 60 | 38.38 | 43 | 115 | 1/3 | 5.4 | 16.02 | (24) 1/6 size |
| | SPED60HC-24M-2 | 2 | 1/2 | | | | | | | | |
| | SPED60HC-24M-4 | 4 | — | | | | | | | | |

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles and rear bumpers.

MEGA TOP

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DRAWERS | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | STANDARD PANS 4" DEEP |
|----------|----------------|---------|-------------------|-------|-------|--------|-------|-----|------|---------------|--------------------------|
| 3 | SPE72HC-12M | — | 3/6 | 72 | 38.38 | 43 | 115 | 1/3 | 5.4 | 20.02 | (12) 1/6 size |
| | SPED72HC-12M-2 | 2 | 2/4 | | | | | | | | |
| | SPED72HC-12M-4 | 4 | 1/2 | | | | | | | | |
| | SPED72HC-12M-6 | 6 | — | | | | | | | | |
| | SPE72HC-18M | — | 3/6 | 72 | 38.38 | 43 | 115 | 1/3 | 5.4 | 20.02 | (18) 1/6 size |
| | SPED72HC-18M-2 | 2 | 2/4 | | | | | | | | |
| | SPED72HC-18M-4 | 4 | 1/2 | | | | | | | | |
| | SPED72HC-18M-6 | 6 | — | | | | | | | | |
| | SPE72HC-24M | — | 3/6 | 72 | 38.38 | 43 | 115 | 1/3 | 5.4 | 20.02 | (24) 1/6 size |
| | SPED72HC-24M-2 | 2 | 2/4 | | | | | | | | |
| | SPED72HC-24M-4 | 4 | 1/2 | | | | | | | | |
| | SPED72HC-24M-6 | 6 | — | | | | | | | | |
| | SPE72HC-30M | — | 3/6 | 72 | 38.38 | 43 | 115 | 1/3 | 5.4 | 20.02 | (30) 1/6 size |
| | SPED72HC-30M-2 | 2 | 2/4 | | | | | | | | |
| | SPED72HC-30M-4 | 4 | 1/2 | | | | | | | | |
| | SPED72HC-30M-6 | 6 | — | | | | | | | | |

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles and rear bumpers.

MEGA TOP – DUAL-SIDED

| SECTIONS | MODEL # | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | STANDARD PANS 4" DEEP |
|----------|------------------|-------------------|-------|-------|--------|-------|-----|------|---------------|--------------------------|
| 1 | SPE27HC-12M-B-DS | 2/2 | 27 | 48.75 | 40.75 | 115 | 1/6 | 2 | 6.91 | (12) 1/6 size |
| 2 | SPE48HC-18M-DS | 4/4 | 48 | 48.75 | 40.75 | 115 | 1/6 | 2.2 | 13.01 | (18) 1/6 size |
| 2 | SPE60HC-24M-DS | 4/4 | 60 | 48.75 | 40.75 | 115 | 1/3 | 5.4 | 16.02 | (24) 1/6 size |
| 3 | SPE72HC-30M-DS | 6/6 | 72 | 48.75 | 40.75 | 115 | 1/3 | 5.4 | 20.02 | (30) 1/6 size |

MEGA TOP – SEE-THRU LIDS

| SECTIONS | MODEL # | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | STANDARD PANS 4" DEEP |
|----------|-----------------|-------------------|-------|-------|--------|-------|-----|------|---------------|--------------------------|
| 2 | SPE36HC-15M-STL | 2/4 | 36 | 38.38 | 53.75 | 115 | 1/6 | 2 | 10.01 | (15) 1/6 size |
| 2 | SPE48HC-18M-STL | 2/4 | 48 | 38.38 | 53.75 | 115 | 1/6 | 2.2 | 13.01 | (18) 1/6 size |
| 2 | SPE60HC-24M-STL | 2/4 | 60 | 38.38 | 53.75 | 115 | 1/3 | 5.4 | 16.02 | (24) 1/6 size |
| 3 | SPE72HC-30M-STL | 3/6 | 72 | 38.38 | 53.75 | 115 | 1/3 | 5.4 | 20.02 | (30) 1/6 size |

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles and rear bumpers.

SANDWICH PREP

CUTTING TOP (17" DEEP REVERSIBLE CUTTING BOARD)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DRAWERS | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | STANDARD PANS 4" DEEP |
|----------|----------------|---------|-------------------|-------|-------|--------|-------|-----|------|---------------|-----------------------------|
| 1 | SPE27HC-C | — | 1/2 | 27 | 38.38 | 39.25 | 115 | 1/6 | 2 | 6.91 | (6) 1/6 size & (2) 1/9 size |
| | SPED27HC-C | 2 | — | | | | | | | | |
| 1 | SPE27HC-C-B | — | 1/2 | 27 | 38.38 | 39.25 | 115 | 1/6 | 2 | 6.91 | (8) 1/6 size |
| | SPED27HC-C-B | 2 | — | | | | | | | | |
| 2 | SPE36HC-08C | — | 2/4 | 36 | 38.38 | 39.25 | 115 | 1/6 | 2 | 10.01 | (8) 1/6 size |
| | SPED36HC-08C-2 | 2 | — | | | | | | | | |
| | SPE36HC-10C | — | 2/4 | 36 | 38.38 | 39.25 | 115 | 1/6 | 2 | 10.01 | (10) 1/6 size |
| | SPED36HC-10C-2 | 2 | — | | | | | | | | |
| 2 | SPE48HC-08C | — | 2/4 | 48 | 38.38 | 39.25 | 115 | 1/6 | 2.2 | 13.01 | (8) 1/6 size |
| | SPED48HC-08C-2 | 2 | 1/2 | | | | | | | | |
| | SPED48HC-08C-4 | 4 | — | | | | | | | | |
| | SPE48HC-10C | — | 2/4 | 48 | 38.38 | 39.25 | 115 | 1/6 | 2.2 | 13.01 | (10) 1/6 size |
| | SPED48HC-10C-2 | 2 | 1/2 | | | | | | | | |
| | SPED48HC-10C-4 | 4 | — | | | | | | | | |
| | SPE48HC-12C | — | 2/4 | 48 | 38.38 | 39.25 | 115 | 1/6 | 2.2 | 13.01 | (12) 1/6 size |
| | SPED48HC-12C-2 | 2 | 1/2 | | | | | | | | |
| | SPED48HC-12C-4 | 4 | — | | | | | | | | |
| 2 | SPE60HC-08C | — | 2/4 | 60 | 38.38 | 39.25 | 115 | 1/3 | 5.4 | 16.02 | (8) 1/6 size |
| | SPED60HC-08C-2 | 2 | 1/2 | | | | | | | | |
| | SPED60HC-08C-4 | 4 | — | | | | | | | | |
| | SPE60HC-10C | — | 2/4 | 60 | 38.38 | 39.25 | 115 | 1/3 | 5.4 | 16.02 | (10) 1/6 size |
| | SPED60HC-10C-2 | 2 | 1/2 | | | | | | | | |
| | SPED60HC-10C-4 | 4 | — | | | | | | | | |
| | SPE60HC-12C | — | 2/4 | 60 | 38.38 | 39.25 | 115 | 1/3 | 5.4 | 16.02 | (12) 1/6 size |
| | SPED60HC-12C-2 | 2 | 1/2 | | | | | | | | |
| | SPED60HC-12C-4 | 4 | — | | | | | | | | |
| | SPE60HC-16C | — | 2/4 | 60 | 38.38 | 39.25 | 115 | 1/3 | 5.4 | 16.02 | (16) 1/6 size |
| | SPED60HC-16C-2 | 2 | 1/2 | | | | | | | | |
| | SPED60HC-16C-4 | 4 | — | | | | | | | | |

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles and rear bumpers.

CUTTING TOP (17" DEEP REVERSIBLE CUTTING BOARD)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DRAWERS | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | STANDARD PANS 4" DEEP |
|----------|----------------|---------|-------------------|-------|-------|--------|-------|-----|------|---------------|--------------------------|
| 3 | SPE72HC-08C | — | 3/6 | 72 | 38.38 | 39.25 | 115 | 1/3 | 5.4 | 20.02 | (8) 1/6 size |
| | SPED72HC-08C-2 | 2 | 2/4 | | | | | | | | |
| | SPED72HC-08C-4 | 4 | 1/2 | | | | | | | | |
| | SPED72HC-08C-6 | 6 | — | | | | | | | | |
| | SPE72HC-10C | — | 3/6 | 72 | 38.38 | 39.25 | 115 | 1/3 | 5.4 | 20.02 | (10) 1/6 size |
| | SPED72HC-10C-2 | 2 | 2/4 | | | | | | | | |
| | SPED72HC-10C-4 | 4 | 1/2 | | | | | | | | |
| | SPED72HC-10C-6 | 6 | — | | | | | | | | |
| | SPE72HC-12C | — | 3/6 | 72 | 38.38 | 39.25 | 115 | 1/3 | 5.4 | 20.02 | (12) 1/6 size |
| | SPED72HC-12C-2 | 2 | 2/4 | | | | | | | | |
| | SPED72HC-12C-4 | 4 | 1/2 | | | | | | | | |
| | SPED72HC-12C-6 | 6 | — | | | | | | | | |
| | SPE72HC-18C | — | 3/6 | 72 | 38.38 | 39.25 | 115 | 1/3 | 5.4 | 20.02 | (18) 1/6 size |
| | SPED72HC-18C-2 | 2 | 2/4 | | | | | | | | |
| | SPED72HC-18C-4 | 4 | 1/2 | | | | | | | | |
| | SPED72HC-18C-6 | 6 | — | | | | | | | | |


For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles and rear bumpers.




SANDWICH PREP

Pan Configurations


Standard Top

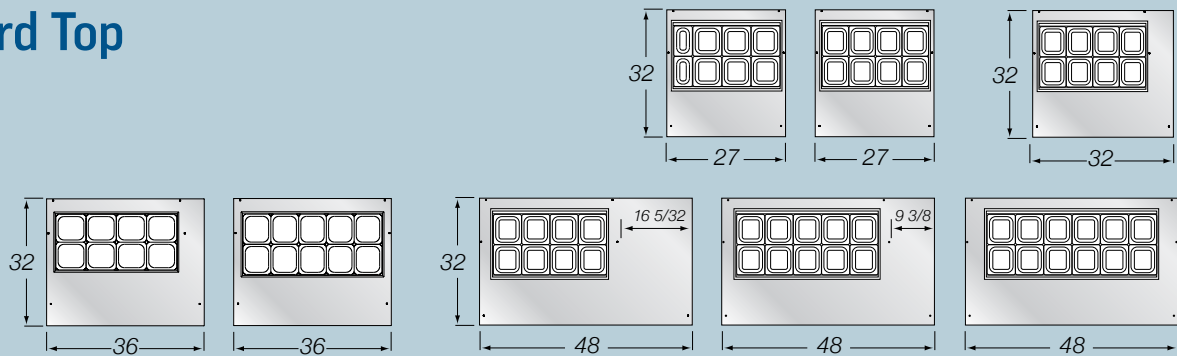




Mega Top

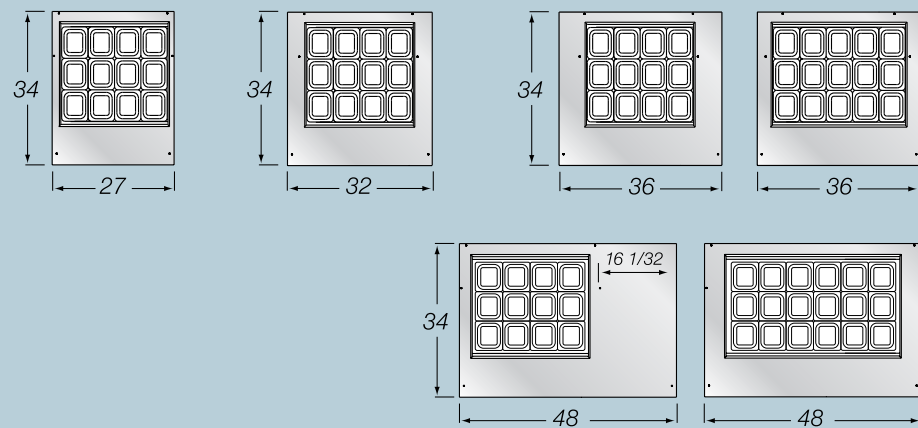

Cutting Top

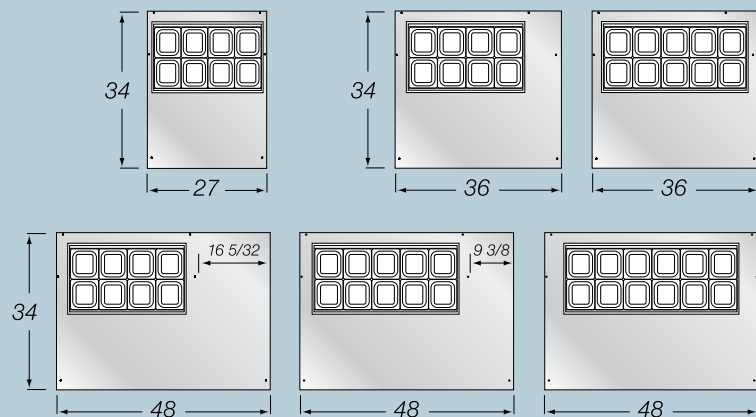

Accommodates up to 6" deep food service pans

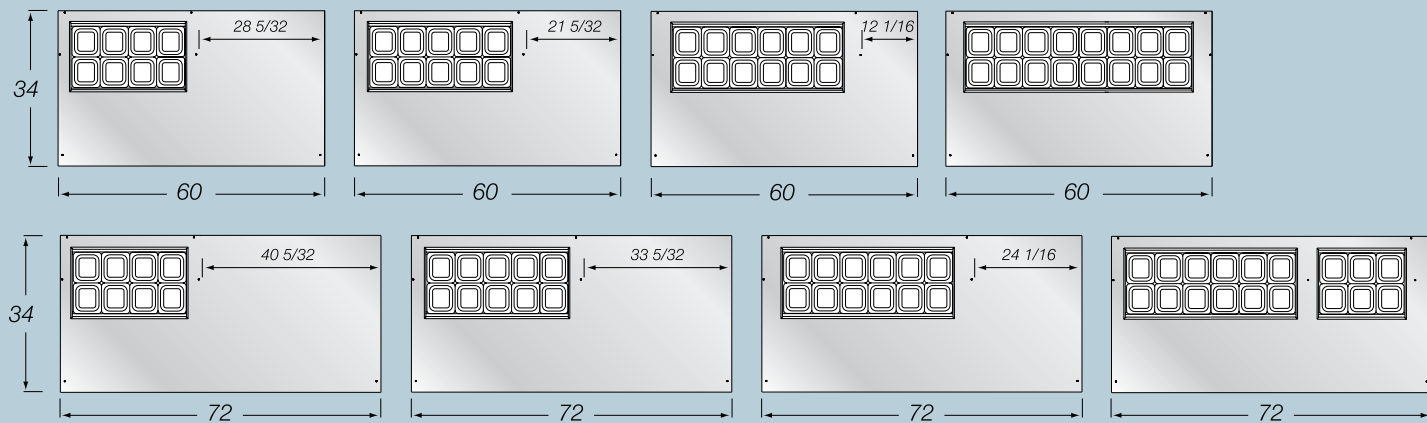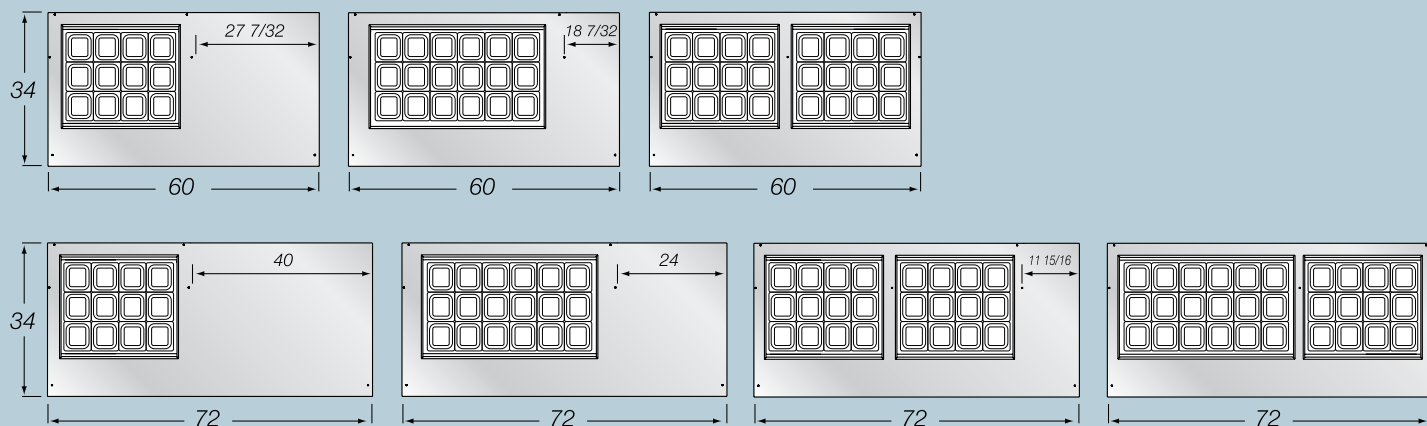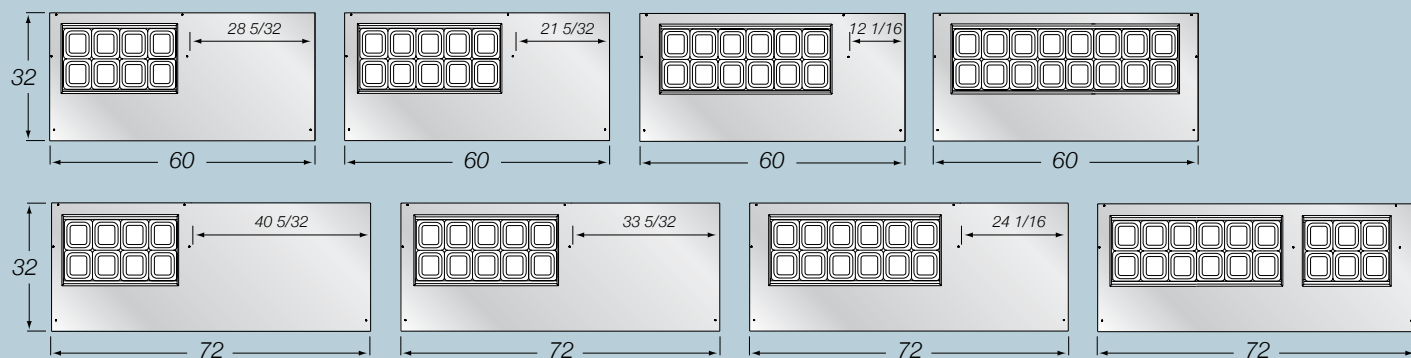

PIZZA PREP

Pizza & Deli Prep Tables



Low-profile design for enhanced ergonomics and product display

Improved airflow maintains consistent pan temperature in top rail

Designed to perform in high ambient conditions

Duct system features uniform airflow distribution

over evaporator coil and throughout raised rail

Electronic controller with smart-defrost

12-Gauge stainless steel drawer slides with Delrin® rollers rated at 275 lbs

Electrical defrost heater

terminates defrost sooner, reducing product instability

Right or left compressor placement

specify at time of order

Field-reversible doors

with 120 degree stay open feature

Heavy-duty aluminum pan liner

is easy to clean and prevents spills from falling into cabinet

Accommodates up to 6" deep food service pans

Not included

Improved serviceability

Removable service panel for easy access to refrigeration system


Featuring environmentally friendly energy efficient R290 refrigerant

7 year warranty on parts, labor, and compressor



ACCESS OPTIONS

- Doors
- Drawers (stacks of 2 or 3)

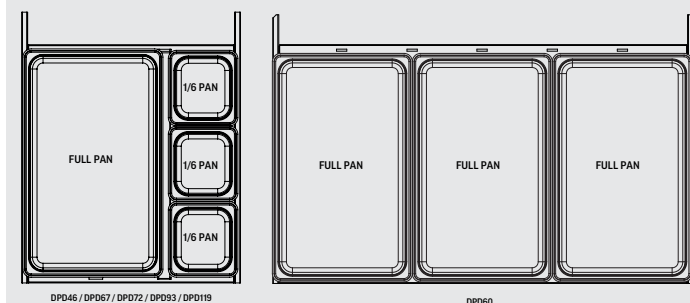DRAWER PAN CONFIGURATIONS
for DPD units**EXTERIOR FINISHES**

- Stainless steel with galvanized back
- Stainless steel with stainless back

INTERIOR FINISHES

- Corrosion-resistant aluminum
- Stainless steel

AVAILABLE OPTIONS

- Left hinge doors
- Remote models available
- Alternate compressor locations

AVAILABLE ACCESSORIES

- Composite cutting boards
- Bun tray racks
- Overshelf
- Locks
- Additional shelves
- Pan slides (18x26)

LID OPTIONS

- Clear lids
- Flat Lift-off lids

MOUNTING OPTIONS

- 3" casters (standard)
- 6" casters
- 6" legs

AGENCY CERTIFICATIONS

3 DRAWERS IN SINGLE SECTION
available on all sizes



CLEAR LIDS AVAILABLE
for optimized product display



PIZZA PREP


PIZZA PREP

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DRAWERS | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | FULL SIZE PAN CAPACITY |
|----------|-------------|---------|-------------------|-------|-------|--------|-------|-----|------|---------------|----------------------------------|
| 1 | DP46HC | - | 1/2 | 46 | 37 | 49.75 | 115 | 1/3 | 4.5 | 11.91 | 2 |
| | DPD46HC-2 | 2 | - | | | | | | | | |
| | DPD46HC-3 | 3 | - | | | | | | | | |
| 2 | DP60HC | - | 2/4 | 60 | 37 | 49.75 | 115 | 1/3 | 4.5 | 17 | 3 full pans & 1 half pan |
| | DPD60HC-2 | 2 | - | | | | | | | | |
| | DPD60HC-3 | 3 | - | | | | | | | | |
| 2 | DP67HC | - | 2/4 | 67 | 37 | 49.75 | 115 | 1/3 | 4.5 | 20.68 | 3 |
| | DPD67HC-2 | 2 | 1/2 | | | | | | | | |
| | DPD67HC-3 | 3 | - | | | | | | | | |
| | DPD67HC-4 | 4 | - | | | | | | | | |
| | DPD67HC-6 | 6 | - | | | | | | | | |
| 2 | DP72HC | - | 2/4 | 72 | 37 | 49.75 | 115 | 1/3 | 4.5 | 21.87 | 3 |
| | DPD72HC-2 | 2 | 1/2 | | | | | | | | |
| | DPD72HC-3 | 3 | - | | | | | | | | |
| | DPD72HC-4 | 4 | - | | | | | | | | |
| | DPD72HC-6 | 6 | - | | | | | | | | |
| 3 | DP93HC | - | 3/6 | 93 | 37 | 49.75 | 115 | 1/2 | 7.8 | 31.54 | 4 |
| | DPD93HC-2 | 2 | 2/4 | | | | | | | | |
| | DPD93HC-3 | 3 | - | | | | | | | | |
| | DPD93HC-4 | 4 | 1/2 | | | | | | | | |
| | DPD93HC-6 | 6 | - | | | | | | | | |
| 4 | DP119HC | - | 4/8 | 119 | 37 | 49.75 | 115 | 1/2 | 7.8 | 42.2 | 5 full pans & 1 one-third pan |
| | DPD119HC-2 | 2 | 3/6 | | | | | | | | |
| | DPD119HC-3 | 3 | 3/6 | | | | | | | | |
| | DPD119HC-4 | 4 | 2/4 | | | | | | | | |
| | DPD119HC-6 | 6 | 1/2 | | | | | | | | |
| | DPD119HC-6T | 6 | 2/4 | | | | | | | | |
| | DPD119HC-8 | 8 | - | | | | | | | | |
| | DPD119HC-9 | 9 | 1/2 | | | | | | | | |

Depth measurement includes cutting board. For total height, add 3 or 6 inches, based on your mounting choice.

PAN CONFIGURATIONS
for DP, DPCR, DPD & DPDCR units

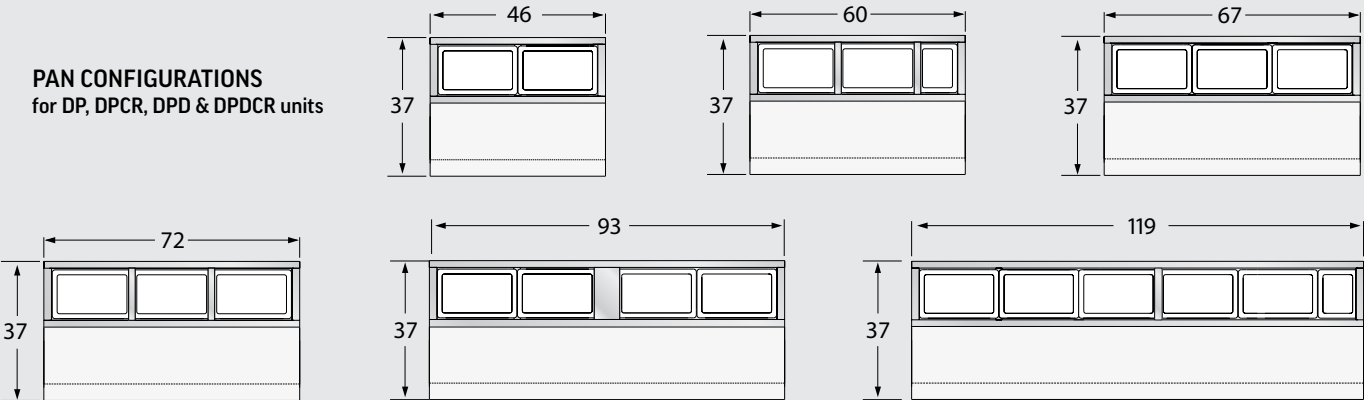

SALAD BARS



**Designed to perform in
high ambient conditions**

**7 year warranty on parts,
labor, and compressor**

Made in USA

Locking divider bars

Lift-off lids standard

to help maintain product temperature

Heavy-duty aluminum pan liner

Easy to clean and prevents spills from falling into cabinet while also ensuring coldest air flows across bottom of pans

Field-reversible doors with 120 degree stay-open feature

Two epoxy coated shelves

per door section standard

Snap-in door gaskets

Accommodates up to 6" deep food service pans

4" deep 1/3 size polycarbonate pans are included


6" heavy duty casters standard

3" casters or 6" leg option available
at no charge when specified on order



PERFECT SEAL PAN LINER

ensures airflow under pans and protects
bottom of cabinet from pan spills

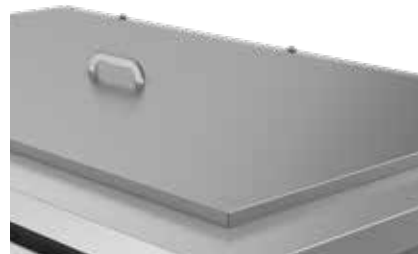

LIFT-OFF LIDS standard

to help maintain product temperature

SALAD BARS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| MODEL # | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | STANDARD PANS 4" DEEP |
|------------------|-------------------|-----------|--------------|--------------|-------|-----|------|---------------|--------------------------|
| SPE36HC-S | 2/4 | 36 | 30.13 | 30.88 | 115 | 1/6 | 2 | 10 | (6) 1/3 size |
| SPE48HC-S | 2/4 | 48 | 30.13 | 30.88 | 115 | 1/6 | 2.2 | 13 | (9) 1/3 size |
| SPE60HC-S | 2/4 | 60 | 30.13 | 30.88 | 115 | 1/3 | 5.4 | 16 | (12) 1/3 size |
| SPE72HC-S | 3/6 | 72 | 30.13 | 30.88 | 115 | 1/3 | 5.4 | 20 | (15) 1/3 size |

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles.

**AVAILABLE ACCESSORIES**

- Foldable tray slides for single or dual-sided service
- Dual-sided sneeze guard, with optional add on for single side service

ACCESS OPTIONS

- Doors

EXTERIOR FINISHES

- Stainless steel with stainless back

INTERIOR FINISHES

- Corrosion-resistant aluminum
- Stainless steel

LID OPTIONS

- Lift-Off Lids

AVAILABLE OPTIONS

- Left hinge doors
- Remote models available

MOUNTING OPTIONS

- 6" casters
- 3" casters (allows for ADA compliant working height)
- 6" legs

AVAILABLE ACCESSORIES

- Foldable tray slides for single or dual-sided service
- Dual-sided sneeze guard, with optional add on for single side service
- Locks

AGENCY CERTIFICATIONS

TOPPING STATIONS



Non-refrigerated top rail holds seven 10" deep jars (not included)

Holds six 4" deep 1/9 pans (not included)

7 year warranty on parts, labor, and compressor

Airflow assures that product in open containers is kept below 41°F and above freezing

Self-closing door with 120° stay-open feature, on cartridge style hinges

Two epoxy coated shelves

Snap-in magnetic gaskets for positive door seal

Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more

Adaptive defrost

Epoxy coated evaporator coil

6" heavy duty casters standard

3" casters or 6" leg option available at no charge when specified on order



NON-REFRIGERATED AND REFRIGERATED STORAGE

provides ample space for ingredients with a top rail that can hold seven 10" deep jars, and a refrigerated pan section that can hold six 4" deep 1/9 pans

TOPPING STATIONS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| MODEL # | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET |
|---------------|-------|-------|--------|-------|------|------|------------|
| TPE27HC-6P-7R | 27 | 31 | 39.13 | 115 | 1/10 | 2 | 6.9 |

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles.

**ACCESS OPTIONS**

- Doors

EXTERIOR FINISHES

- Stainless steel with galvanized back
- Stainless steel with stainless back

INTERIOR FINISHES

- Corrosion-resistant aluminum
- Stainless steel

AVAILABLE OPTIONS

- Left hinge doors
- Remote models available

MOUNTING OPTIONS

- 6" casters
- 3" casters (allows for ADA compliant working height)
- 6" legs

AVAILABLE ACCESSORIES

- Side/front crumb catchers
- Bun tray rack
- Locks (for solid doors)

AGENCY CERTIFICATIONS

Food Prep Table Accessories

| DESCRIPTION | UNIT(S) | PART NUMBER |
|---|-------------------------------|---------------|
| SHELVING / ORGANIZERS | | |
| Epoxy Coated Wire Shelf (Large) | SPE27/27-12M/27C | 403-826B |
| Epoxy Coated Wire Shelf (Small) | SPE27/SPE27-12M/SPE27C | 403-912D-01 |
| Epoxy Coated Wire Shelf (Large) | SPE36/SPE36M/SPE36C | 403-911D-01 |
| Epoxy Coated Wire Shelf (Small) | SPE36/SPE36M/SPE36C | 403-915D-01 |
| Epoxy Coated Wire Shelf (Large) | SPE48/48M/48C | 403-828B |
| Epoxy Coated Wire Shelf (Small) | SPE48/SPE48M/SPE48C | 403-913D-01 |
| Epoxy Coated Wire Shelf (Large) | SPE60/60M/60C | 403-829B |
| Epoxy Coated Wire Shelf (Small) | SPE60/SPE60M/SPE60C | 403-914D-01 |
| Epoxy Coated Ctr Section Wire Shelf (Large) | SPE72/72M/72C | 403-827B |
| Epoxy Coated Wire Shelf L&R (Large) | SPE72/72M/72C | 403-828B |
| Epoxy Coated Ctr Section Wire Shelf (Small) | SPE72/SPE72M/SPE72C | 403-912D-01 |
| Epoxy Coated Wire Shelf L&R (Small) | SPE72/SPE72M/SPE72C | 403-913D-01 |
| Shelf Clip | All SPE/SPED/DP/DPD | 403-169A |
| Large Wire Shelf Divider | SPE27 | 403-722C |
| Small Wire Shelf Divider | SPE27 | 403-721C |
| Large Wire Shelf Divider | SPE36 | 403-723C |
| Small Wire Shelf Divider | SPE36 | 403-721C |
| Large Wire Shelf Divider | SPE48 | 403-723C |
| Small Wire Shelf Divider | SPE48 | 403-721C |
| Large Wire Shelf Divider | SPE60 | 403-723C |
| Small Wire Shelf Divider | SPE60 | 403-721C |
| Large Wire Shelf Divider | SPE72 | 403-723C |
| Small Wire Shelf Divider | SPE72 | 403-721C |
| Bottle Organizer (Holds Qty. 10 Bottles) 16 oz. | SPE Mega Tops | 00B23-023D-01 |
| Bottle Organizer (Holds Qty. 10 Bottles) 24 oz. | SPE Mega Tops | 00B23-024D-01 |
| Bottle Organizer (Holds Qty. 8 Bottles) 16 oz. | SPE Standard & Cutting Tops | 00B23-025D-01 |
| Bottle Organizer (Holds Qty. 6 Bottles) 24 oz. | SPE Standard & Cutting Tops | 00B23-026D-01 |
| CRUMBCATCHERS | | |
| Crumbcatcher Kit | SPE27A/SPE27B/SPE27MA/SPE27MB | 00C23-071A-01 |
| Crumbcatcher Kit | SPE36/36M | 00C23-071A-09 |
| Crumbcatcher Kit | SPE48/48M | 00C23-071A-02 |
| Crumbcatcher Kit | SPE60/60M | 00C23-071A-03 |
| Crumbcatcher Kit | SPE72/72M | 00C23-071A-04 |
| Crumbcatcher Kit | SPE27C | 00C23-071A-05 |
| Crumbcatcher Kit | SPE48C | 00C23-071A-06 |
| Crumbcatcher Kit | SPE60C | 00C23-071A-07 |
| Crumbcatcher Kit | SPE72C | 00C23-071A-08 |
| Side Crumbcatcher Kit | SPE Series | 00C23-072A |
| TRAY SLIDES & PAN INSERTS | | |
| Pan Insert | SPE27A | 00B23-032D-01 |
| Pan Insert | SPE27B | 00B32-033D-01 |

| DESCRIPTION | UNIT(S) | PART NUMBER |
|-------------|---------|-------------|
|-------------|---------|-------------|

SPE WHITE POLY CUTTING BOARDS

| | | |
|-------------------|-------------------------|-------------|
| 10" Cutting Board | SPE27/27-12M, SPED27 | 705-290C-01 |
| 10" Cutting Board | SPE36/SPE36 MEGA/SPED36 | 705-290C-05 |
| 10" Cutting Board | SPE48/48M, SPED48 | 705-290C-02 |
| 10" Cutting Board | SPE60/60M, SPED60 | 705-290C-03 |
| 10" Cutting Board | SPE72/72M, SPED72 | 705-290C-04 |
| 17" Cutting Board | SPE27C, SPED27C | 705-264C |
| 17" Cutting Board | SPE32C, SPED32C | 705-414D-02 |
| 17" Cutting Board | SPE36C/SPED36C | 705-414D-01 |
| 17" Cutting Board | SPE48C, SPED48C | 705-265C |
| 17" Cutting Board | SPE60C, SPED60C | 705-266C |
| 17" Cutting Board | SPE72C, SPED72C | 705-267C |

DP WHITE POLY CUTTING BOARDS (1/2" THICK)

| | | |
|-------------------|-------|-------------|
| 19" Cutting Board | DP46 | 705-307C-01 |
| 19" Cutting Board | DP67 | 705-286B |
| 19" Cutting Board | DP93 | 705-287B |
| 19" Cutting Board | DP119 | 705-288B |

SPE COMPOSITE CUTTING BOARDS (1/2" THICK)

| | | |
|-----------------------------|--------|-------------|
| 10" Composite Cutting Board | SPE27M | 705-392D-06 |
| 17" Composite Cutting Board | SPE27C | 705-392D-07 |
| 10" Composite Cutting Board | SPE36A | 705-392D-15 |
| 10" Composite Cutting Board | SPE48 | 705-392D-04 |
| 12" Composite Cutting Board | SPE48 | 705-378B-01 |
| 15" Composite Cutting Board | SPE48C | 705-392D-01 |
| 17" Composite Cutting Board | SPE48C | 705-392D-08 |
| 10" Composite Cutting Board | SPE60 | 705-392D-05 |
| 15" Composite Cutting Board | SPE60C | 705-392D-02 |
| 17" Composite Cutting Board | SPE60C | 705-392D-09 |
| 10" Composite Cutting Board | SPE72 | 705-378B-02 |
| 17" Composite Cutting Board | SPE72C | 705-392D-10 |

DP COMPOSITE CUTTING BOARDS (1/2" THICK)

| | | |
|------------------------------------|-------|-------------|
| 19" X 46" Composite Cutting Board | DP46 | 705-392D-11 |
| 19" X 67" Composite Cutting Board | DP67 | 705-392D-12 |
| 19" X 93" Composite Cutting Board | DP93 | 705-392D-13 |
| 19" X 119" Composite Cutting Board | DP119 | 705-392D-14 |

Food Prep Table Accessories

| DESCRIPTION | UNIT(S) | PART NUMBER |
|-------------------------|-----------------|---------------|
| OVERSHELVES | | |
| 10" Single | SPE27 | 00C23S026A |
| 10" Single | SPE36-08 | 00C23-074A-11 |
| 10" Single | SPE36-10 | 00C23-074A-12 |
| 10" Single | SPE48 | 00C23-027A |
| 10" Single | SPE60 | 00C23-028A |
| 10" Single | SPE72 | 00C23-029A |
| 10" Double | SPE27 | 00C23-030A |
| 10" Double | SPE36-08 | 00C23-075A-08 |
| 10" Double | SPE36-10 | 00C23-075A-09 |
| 10" Double | SPE48 | 00C23-031A |
| 10" Double | SPE60 | 00C23-032A |
| 10" Double | SPE72 | 00C23-033A |
| Single | SPE27-12M | 00C23-074A-01 |
| Single | SPE32-12M | 00C23-074A-02 |
| Single | SPE36-12M | 00C23-074A-10 |
| Single | SPE36-15M | 00C23-074A-12 |
| Single | SPE48/60/72-12M | 00C23-074A-02 |
| Single | SPE48-18M | 00C23-074A-03 |
| Single / For Dual-Sided | SPE48-18M-DS | 00C23-105D |
| Single | SPE60-18M | 00C23-074A-04 |
| Single | SPE60-24M | 00C23-074A-05 |
| Single / For Dual-Sided | SPE60-24M-DS | 00C23-106D |
| Single | SPE72-18M | 00C23-074A-06 |
| Single | SPE72-24M | 00C23-074A-07 |
| Single | SPE72-30M | 00C23-074A-08 |
| Single / For Dual-Sided | SPE72-30M-DS | 00C23-093A |
| Double | SPE27-12M | 00C23-030A |
| Double | SPE27-12M-B | 00C23-075A-06 |
| Double | SPE36-12M | 00C23-075A-08 |
| Double | SPE36-15M | 00C23-075A-09 |
| Double | SPE48-12M | 00C23-075A-01 |
| Double / For Dual-Sided | SPE48-18M-DS | 00C23-107D-02 |
| Double | SPE60-12M | 00C23-075A-01 |
| Double | SPE72-12M | 00C23-075A-01 |
| Double | SPE48-18M | 00C23-075A-02 |
| Double | SPE60-18M | 00C23-075A-03 |
| Double | SPE60-24M | 00C23-075A-04 |
| Double / For Dual-Sided | SPE60-24M-DS | 00C23-107D-03 |
| Double | SPE72-24M | 00C23-032A |
| Double | SPE72-30M | 00C23-075A-05 |
| Double / For Dual-Sided | SPE72-30M-DS | 00C23-107D-04 |
| Single - 14" Deep | DP46 | 00C23-044A |
| Single - 14" Deep | DP60 | 00C23-161D-01 |
| Single - 14" Deep | DP67 | 00C23-045A |
| Single - 14" Deep | DP72 | 00C23-161D-03 |
| Single - 14" Deep | DP93 | 00C23-046A |
| Single - 14" Deep | DP119 | 00C23-161D-05 |

Clear-lid models (-CL) of SPE and SPED units cannot have an overshelf

| DESCRIPTION | UNIT(S) | PART NUMBER |
|--|---------------------------------|---------------|
| OVERSHELVES CONT'D | | |
| Double - 14" Deep | DP46 | 00C23-119D-01 |
| Double - 14" Deep | DP60 | 00C23-161D-02 |
| Double - 14" Deep | DP67 | 00C23-116D-01 |
| Double - 14" Deep | DP72 | 00C23-161D-04 |
| Double - 14" Deep | DP93 | 00C23-120D-01 |
| Double - 14" Deep | DP119 | 00C23-161D-06 |
| Single - 14" Deep | SPE36-15M-STL | 00C23-110D |
| Single - 14" Deep | SPE48-18M-STL | 00C23-094D |
| Single - 14" Deep | SPE60-24M-STL | 00C23-095D |
| Single - 14" Deep | SPE72-30M-STL | 00C23-096D |
| Single - 14" Deep with side guards & LED light | SPE48-18M-STL | 00C23-113D-01 |
| Single - 14" Deep with side guards & LED light | SPE60-24M-STL | 00C23-113D-02 |
| Single - 14" Deep with side guards & LED light | SPE72-30M-STL | 00C23-113D-03 |
| Double - 10" Deep | SPE27 (will not work on B top) | 00C23-123D-01 |
| Double - 10" Deep | SPE48-18M-DS | 00C23-125D-01 |
| Double - 10" Deep | SPE60-24M-DS | 00C23-126D-01 |
| Double - 10" Deep | SPE72-30M-DS | 00C23-127D-01 |
| Double - 18" Deep | SPE27-M (will not fit on B top) | 00C23-128D-01 |
| Double - 18" Deep | SPE36-M | 00C23-129D-01 |
| Double - 18" Deep | SPE48-M | 00C23-130D-01 |
| Double - 18" Deep | SPE60-M | 00C23-131D-01 |
| Double - 18" Deep | SPE72-M | 00C23-132D-01 |

Clear-lid models (-CL) of SPE and SPED units cannot have an overshelf

| | | |
|-------------------------------|-------------------------------|------------|
| ADDITIONAL ACCESSORIES | | |
| Door Lock | DP, SPE (per door) | 00C30-099A |
| MOUNTING | | |
| 3" Caster | SPE units (set of four) | 00C31-041A |
| 6" Caster | SPE units (set of four) | 00C31-038A |
| 3" Caster | DP46,67,93 (set of four) | 61C01-013A |
| 6" Caster | DP46,67,93 (set of four) | 61C01-001A |
| 3" Caster | DP119 (set of six) | 61C01-012A |
| 6" Black Leg | SPE units (set of four) | 58B02-001A |
| 6" Black Leg | DP46,67,93 (set of four) | 58B02-001A |
| 6" Black Leg | DP119 (set of six) | 58B02S002A |
| 6" Seismic/Flanged Legs | SPE Series (set of four) | 00C31-055A |
| 6" Seismic/Flanged Legs | DP Series (set of four) | 00C31-055A |
| 2 3/4 in Caster Kit | Low Profile (set of four) SPE | 00C31-049A |
| 2" Roller Kit | SPE units | 00C31-045A |

Food Prep Table Accessories

| UNIT(S) | | DESCRIPTION | PART NUMBER |
|---------|--|-------------|-------------|
|---------|--|-------------|-------------|

| NIGHT COVERS FOR STANDARD PREP | COVERS REQUIRED | DESCRIPTION | PART NUMBER |
|--------------------------------|-----------------|--------------|---------------|
| SPE27HCHC | 1 | 8 pan cover | 00C32-013A-02 |
| SPE32HCHC-08 | 1 | 8 pan cover | 00C32-013A-06 |
| SPE36HC-08 | 1 | 8 pan cover | 00C32-013A-06 |
| SPE36HC-10 | 1 | 10 pan cover | 00C32-013A-07 |
| SPE48HC-08 | 1 | 8 pan cover | 00C32-013A-02 |
| SPE48HC-10 | 1 | 10 pan cover | 00C32-013A-03 |
| SPE48HC-12 | 1 | 12 pan cover | 00C32-013A-04 |
| SPE60HC-08 | 1 | 8 pan cover | 00C32-013A-02 |
| SPE60HC-10 | 1 | 10 pan cover | 00C32-013A-03 |
| SPE60HC-12 | 1 | 12 pan cover | 00C32-013A-04 |
| SPE60HC-16 | 1 | 16 pan cover | 00C32-013A-05 |
| SPE72HC-08 | 1 | 8 pan cover | 00C32-013A-02 |
| SPE72HC-10 | 1 | 10 pan cover | 00C32-013A-03 |
| SPE72HC-12 | 1 | 12 pan cover | 00C32-013A-04 |
| SPE72HC-18 | 2 | 12 pan cover | 00C32-013A-04 |
| | | 6 pan cover | 00C32-013A-01 |

| NIGHT COVERS FOR MEGATOP PREP | COVERS REQUIRED | DESCRIPTION | PART NUMBER |
|-------------------------------|-----------------|--------------------------|---------------|
| SPE27HC-12M | 1 | 12 pan cover | 00C32-014A-03 |
| SPE32HC-12M | 1 | 12 pan cover | 00C32-014A-01 |
| SPE36HC-12M | 1 | 12 pan cover | 00C32-014A-01 |
| SPE36HC-15M | 1 | 15 pan cover | 00C32-014A-04 |
| SPE48HC-12M | 1 | 12 pan cover | 00C32-014A-01 |
| SPE48HC-18M | 1 | 18 pan cover | 00C32-014A-02 |
| SPE60HC-12M | 1 | 12 pan cover | 00C32-014A-01 |
| SPE60HC-18M | 1 | 18 pan cover | 00C32-014A-02 |
| SPE60HC-24M | 2 | 12 pan cover (order two) | 00C32-014A-01 |
| SPE72HC-12M | 1 | 12 pan cover | 00C32-014A-01 |
| SPE72HC-18M | 1 | 18 pan cover | 00C32-014A-02 |
| SPE72HC-24M | 2 | 12 pan cover (order two) | 00C32-014A-01 |
| SPE72HC-30M | 2 | 12 pan cover | 00C32-014A-01 |
| | | 18 pan cover | 00C32-014A-02 |

| NIGHT COVERS FOR PIZZA PREP | COVERS REQUIRED | DESCRIPTION | PART NUMBER |
|-----------------------------|-----------------|------------------------------------|---------------|
| DP46HC | 1 | full cover | 00C32-017A-03 |
| DP60HC | 1 | full cover | 00C32-022D-04 |
| DP67HC | 1 | full cover | 00C32-022D-01 |
| DP72HC | 1 | full cover | 00C32-022D-03 |
| DP93HC | 2 | section cover (order two) | 00C32-017A-01 |
| DP119HC | 2 | kit contains left and right covers | 00C32-022D-02 |

| DESCRIPTION | UNIT(S) | PART NUMBER |
|--|-----------|---------------|
| SALAD BAR - SNEEZE GUARDS | | |
| Sneeze Guard | SPE36HC-S | 00C23-160D-01 |
| Sneeze Guard | SPE48HC-S | 00C23-160D-02 |
| Sneeze Guard | SPE60HC-S | 00C23-160D-03 |
| Sneeze Guard | SPE72HC-S | 00C23-160D-04 |
| SALAD BAR - SNEEZE GUARD EXTENSION WALL FOR SINGLE SIDE SERVICE | | |
| Add-on wall for single side service | SPE36HC-S | 00C23-162D-02 |
| Add-on wall for single side service | SPE48HC-S | 00C23-162D-03 |
| Add-on wall for single side service | SPE60HC-S | 00C23-162D-04 |
| Add-on wall for single side service | SPE72HC-S | 00C23-162D-05 |
| SALAD BAR - FOLDING TRAY SLIDES | | |
| Folding tray slide (order 2 for dual-side service) | SPE36HC-S | 408-018D-36 |
| Folding tray slide (order 2 for dual-side service) | SPE48HC-S | 408-018D-48 |
| Folding tray slide (order 2 for dual-side service) | SPE60HC-S | 408-018D-60 |
| Folding tray slide (order 2 for dual-side service) | SPE72HC-S | 408-018D-72 |





WORKTOPS & UNDERCOUNTERS

FOUNDATION OF KITCHEN LAYOUTS BUILT TO PERFORM

Worktops



Undercounters



WORKTOPS

Refrigerators & Freezers



**Designed to perform in
high ambient conditions**

**7 year warranty on parts,
labor, and compressor**

Made in USA

Stainless steel top

(side-mount worktops come standard
with 16-gauge stainless steel top)

Mechanical or Full electronic control

- Mechanical controller standard in refrigerator units sizes 20-34
- Full electronic controller standard in refrigerator units sizes 36 and higher, and in all freezer and dual-temp units

Self-closing doors

with 120° stay-open feature, on cartridge style hinges

Magnetic gasket

attached to each door for positive seal

**Featuring environmentally friendly
energy efficient R290 refrigerant**

**Two epoxy-coated steel
wire shelves per section**

Field-reversible doors





On select models

6" heavy duty casters

various ADA compliant mounting options



DRAWER PAN CONFIGURATIONS for WTRD and WTFD units

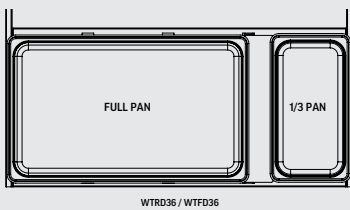

REMOVABLE BACKSPLASH
available as an option, as well as a Flat
Top, or a Foamed-in-Place backsplash



FIELD-REVERSIBLE DOORS
for layout flexibility

EXTERIOR FINISHES

- Stainless steel with galvanized back
- Stainless steel with stainless back

INTERIOR FINISHES

- Corrosion-resistant aluminum
- Stainless steel

AVAILABLE OPTIONS

- Left hinge doors
- Remote models available
- Electronic controllers
(for refrigerator units sizes 20-34)

AVAILABLE ACCESSORIES

- Composite cutting boards
(only available on rear-mounted worktops)
- Bun tray rack
- Door Locks (specify at time of order)
- Glass doors (rear-mount units only)
- 16-gauge stainless steel top
(rear-mount units only)

BACKSPLASH OPTIONS

- Removable
- 4" foamed-in-place
- Flat-top

MOUNTING OPTIONS

- 6" casters
- 3" casters
- 2.75" low-profile casters
- 1.25" roller-kit
- 6" legs

AGENCY CERTIFICATIONS



AVAILABLE IN REAR MOUNTED AND SIDE MOUNTED SYSTEMS, WITH SOLID OR GLASS DOORS



WORKTOPS

Rear-Mounted Refrigeration

REFRIGERATORS - REAR MOUNTED

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DRAWERS | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | BACKSPLASH |
|----------|-----------------|---------|-------------------|-------|-------|--------|-------|-----|------|---------------|------------|
| 1 | WTR24AHC | — | 1/2 | 24 | 32 | 33.63 | 115 | 1/6 | 2 | 5.16 | REMOVABLE |
| | WTR24AHC-FIP | | | 24 | 32 | 33.63 | 115 | 1/6 | 2 | 5.16 | FOAM |
| | WTR24AHC-FLT | | | 24 | 32 | 29.63 | 115 | 1/6 | 2 | 5.16 | FLAT TOP |
| 1 | WTR27AHC | — | 1/2 | 27 | 32 | 33.63 | 115 | 1/6 | 2 | 6.13 | REMOVABLE |
| | WTRD27AHC-2 | 2 | — | | | | | | | | |
| 1 | WTR27AHC-FIP | — | 1/2 | 27 | 32 | 33.63 | 115 | 1/6 | 2 | 6.13 | FOAM |
| | WTRD27AHC-2-FIP | 2 | — | | | | | | | | |
| 1 | WTR27AHC-FLT | — | 1/2 | 27 | 32 | 29.63 | 115 | 1/6 | 2 | 6.13 | FLAT TOP |
| | WTRD27AHC-2-FLT | 2 | — | | | | | | | | |
| 1 | WTR32AHC | — | 1/2 | 32 | 32 | 33.63 | 115 | 1/6 | 2 | 7.2 | REMOVABLE |
| | WTRD32AHC-2 | 2 | — | | | | | | | | |
| 1 | WTR32AHC-FIP | — | 1/2 | 32 | 32 | 33.63 | 115 | 1/6 | 2 | 7.2 | FOAM |
| | WTRD32AHC-2-FIP | 2 | — | | | | | | | | |
| 1 | WTR32AHC-FLT | — | 1/2 | 32 | 32 | 29.63 | 115 | 1/6 | 2 | 7.2 | FLAT TOP |
| | WTRD32AHC-2-FLT | 2 | — | | | | | | | | |
| 2 | WTR36AHC | — | 2/4 | 36 | 32 | 33.63 | 115 | 1/6 | 2 | 8.5 | REMOVABLE |
| | WTRD36AHC-2 | 2 | — | | | | | | | | |
| 2 | WTR36AHC-FIP | — | 2/4 | 36 | 32 | 33.63 | 115 | 1/6 | 2 | 8.5 | FOAM |
| | WTRD36AHC-2-FIP | 2 | — | | | | | | | | |
| 2 | WTR36AHC-FLT | — | 2/4 | 36 | 32 | 29.63 | 115 | 1/6 | 2 | 8.5 | FLAT TOP |
| | WTRD36AHC-2-FLT | 2 | — | | | | | | | | |
| 2 | WTR48AHC | — | 2/4 | 48 | 32 | 33.63 | 115 | 1/6 | 2.2 | 11.82 | REMOVABLE |
| | WTRD48AHC-2 | 2 | 1/2 | | | | | | | | |
| | WTRD48AHC-4 | 4 | — | | | | | | | | |
| 2 | WTR48AHC-FIP | — | 2/4 | 48 | 32 | 33.63 | 115 | 1/6 | 2.2 | 11.82 | FOAM |
| | WTRD48AHC-2-FIP | 2 | 1/2 | | | | | | | | |
| | WTRD48AHC-4-FIP | 4 | — | | | | | | | | |
| 2 | WTR48AHC-FLT | — | 2/4 | 48 | 32 | 29.63 | 115 | 1/6 | 2.2 | 11.82 | FLAT TOP |
| | WTRD48AHC-2-FLT | 2 | 1/2 | | | | | | | | |
| | WTRD48AHC-4-FLT | 4 | — | | | | | | | | |

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles and rear bumpers.

REFRIGERATORS - REAR MOUNTED

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DRAWERS | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | BACK SPLASH |
|----------|-----------------|---------|-------------------|-------|-------|--------|-------|-----|------|---------------|-------------|
| 2 | WTR60AHC | — | 2/4 | 60 | 32 | 33.63 | 115 | 1/5 | 3 | 14.75 | REMOVABLE |
| | WTRD60AHC-2 | 2 | 1/2 | | | | | | | | |
| | WTRD60AHC-4 | 4 | — | | | | | | | | |
| 2 | WTR60AHC-FIP | — | 2/4 | 60 | 32 | 33.63 | 115 | 1/5 | 3 | 14.75 | FOAM |
| | WTRD60AHC-2-FIP | 2 | 1/2 | | | | | | | | |
| | WTRD60AHC-4-FIP | 4 | — | | | | | | | | |
| 2 | WTR60AHC-FLT | — | 2/4 | 60 | 32 | 29.63 | 115 | 1/5 | 3 | 14.75 | FLAT TOP |
| | WTRD60AHC-2-FLT | 2 | 1/2 | | | | | | | | |
| | WTRD60AHC-4-FLT | 4 | — | | | | | | | | |
| 3 | WTR72AHC | — | 3/6 | 72 | 32 | 33.63 | 115 | 1/5 | 3 | 17.88 | REMOVABLE |
| | WTRD72AHC-2 | 2 | 2/4 | | | | | | | | |
| | WTRD72AHC-4 | 4 | 1/2 | | | | | | | | |
| | WTRD72AHC-6 | 6 | — | | | | | | | | |
| 3 | WTR72AHC-FIP | — | 3/6 | 72 | 32 | 33.63 | 115 | 1/5 | 3 | 17.88 | FOAM |
| | WTRD72AHC-2-FIP | 2 | 2/4 | | | | | | | | |
| | WTRD72AHC-4-FIP | 4 | 1/2 | | | | | | | | |
| | WTRD72AHC-6-FIP | 6 | — | | | | | | | | |
| 3 | WTR72AHC-FLT | — | 3/6 | 72 | 32 | 29.63 | 115 | 1/5 | 3 | 17.88 | FLAT TOP |
| | WTRD72AHC-2-FLT | 2 | 2/4 | | | | | | | | |
| | WTRD72AHC-4-FLT | 4 | 1/2 | | | | | | | | |
| | WTRD72AHC-6-FLT | 6 | — | | | | | | | | |

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles and rear bumpers.

BACKSPLASH OPTIONS



standard
Removable backsplash
ex: **WTR48AHC**



-FIP
4" foamed-in-place backsplash
ex: **WTR48AHC-FIP**



-FLT
Flat-top with no backsplash
ex: **WTR48AHC-FLT**

WORKTOPS

Shallow Depth Refrigeration (Rear-Mounted)

REFRIGERATORS (SHALLOW DEPTH)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | BACK SPLASH |
|----------|-------------|-------------------|-------|-------|--------|-------|-----|------|---------------|-------------|
| 1 | WTR20HC | 1/2 | 20 | 24.5 | 30.13 | 115 | 1/6 | 2 | 2.34 | REMOVABLE |
| | WTR20HC-FIP | 1/2 | 20 | 24.5 | 30.13 | 115 | 1/6 | 2 | 2.34 | FOAM |
| | WTR20HC-FLT | 1/2 | 20 | 24.5 | 26.13 | 115 | 1/6 | 2 | 2.34 | FLAT TOP |
| 1 | WTR27HC | 1/2 | 27 | 29.88 | 33.63 | 115 | 1/6 | 2 | 5.25 | REMOVABLE |
| | WTR27HC-FIP | 1/2 | 27 | 29.88 | 33.63 | 115 | 1/6 | 2 | 5.25 | FOAM |
| | WTR27HC-FLT | 1/2 | 27 | 29.88 | 29.63 | 115 | 1/6 | 2 | 5.25 | FLAT TOP |
| 2 | WTR34HC | 2/4 | 34 | 24.63 | 30.13 | 115 | 1/6 | 2 | 3.88 | REMOVABLE |
| | WTR34HC-FIP | 2/4 | 34 | 24.63 | 30.13 | 115 | 1/6 | 2 | 3.88 | FOAM |
| | WTR34HC-FLT | 2/4 | 34 | 24.63 | 26.13 | 115 | 1/6 | 2 | 3.88 | FLAT TOP |

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles and rear bumpers.





WORKTOPS

Rear-Mounted Freezers

FREEZERS - REAR MOUNTED

MAINTAINS PRODUCT TEMPERATURE AT 0° F AND BELOW.

| SECTIONS | MODEL # | DRAWERS | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | BACKSPLASH |
|----------|-----------------|---------|-------------------|-------|-------|--------|-------|------|------|---------------|------------|
| 1 | WTF24AHC | — | 1/2 | 24 | 32 | 33.63 | 115 | 1/4 | 2.5 | 4.9 | REMOVABLE |
| | WTF24AHC-FIP | | | 24 | 32 | 33.63 | 115 | 1/4 | 2.5 | 4.9 | FOAM |
| | WTF24AHC-FLT | | | 24 | 32 | 29.63 | 115 | 1/4 | 2.5 | 4.9 | FLAT TOP |
| 1 | WTF27AHC | — | 1/2 | 27 | 32 | 33.63 | 115 | 1/4 | 2.5 | 6.13 | REMOVABLE |
| | WTFD27AHC-2 | 2 | — | | | | | | | | |
| 1 | WTF27AHC-FIP | — | 1/2 | 27 | 32 | 33.63 | 115 | 1/4 | 2.5 | 6.13 | FOAM |
| | WTFD27AHC-2-FIP | 2 | — | | | | | | | | |
| 1 | WTF27AHC-FLT | — | 1/2 | 27 | 32 | 29.63 | 115 | 1/4 | 2.5 | 6.13 | FLAT TOP |
| | WTFD27AHC-2-FLT | 2 | — | | | | | | | | |
| 1 | WTF32AHC | — | 1/2 | 32 | 32 | 33.63 | 115 | 1/3+ | 4 | 7.2 | REMOVABLE |
| | WTFD32AHC-2 | 2 | — | | | | | | | | |
| 1 | WTF32AHC-FIP | — | 1/2 | 32 | 32 | 33.63 | 115 | 1/3+ | 4 | 7.2 | FOAM |
| | WTFD32AHC-2-FIP | 2 | — | | | | | | | | |
| 2 | WTF32AHC-FLT | — | 1/2 | 32 | 32 | 29.63 | 115 | 1/3+ | 4 | 7.2 | FLAT TOP |
| | WTFD32AHC-2-FLT | 2 | — | | | | | | | | |
| 2 | WTF36AHC | — | 2/4 | 36 | 32 | 33.63 | 115 | 1/4 | 6 | 8.69 | REMOVABLE |
| | WTFD36AHC-2 | 2 | — | | | | | | | | |
| 2 | WTF36AHC-FIP | — | 2/4 | 36 | 32 | 33.63 | 115 | 1/4 | 6 | 8.69 | FOAM |
| | WTFD36AHC-2-FIP | 2 | — | | | | | | | | |
| 2 | WTF36AHC-FLT | — | 2/4 | 36 | 32 | 33.63 | 115 | 1/4 | 6 | 8.69 | FLAT TOP |
| | WTFD36AHC-2-FLT | 2 | — | | | | | | | | |

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles and rear bumpers.

FREEZERS - REAR MOUNTED

MAINTAINS PRODUCT TEMPERATURE AT 0° F AND BELOW.

| SECTIONS | MODEL # | DRAWERS | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | BACK SPLASH |
|----------|-----------------|---------|-------------------|-------|-------|--------|-------|-----|------|---------------|-------------|
| 2 | WTF48AHC | — | 2/4 | 48 | 32 | 33.63 | 115 | 1/2 | 7 | 11.04 | REMOVABLE |
| | WTFD48AHC-2 | 2 | 1/2 | | | | | | | | |
| | WTFD48AHC-4 | 4 | — | | | | | | | | |
| 2 | WTF48AHC-FIP | — | 2/4 | 48 | 32 | 33.63 | 115 | 1/2 | 7 | 11.04 | FOAM |
| | WTFD48AHC-2-FIP | 2 | 1/2 | | | | | | | | |
| | WTFD48AHC-4-FIP | 4 | — | | | | | | | | |
| 2 | WTF48AHC-FLT | — | 2/4 | 48 | 32 | 29.63 | 115 | 1/2 | 7 | 11.04 | FLAT TOP |
| | WTFD48AHC-2-FLT | 2 | 1/2 | | | | | | | | |
| | WTFD48AHC-4-FLT | 4 | — | | | | | | | | |
| 2 | WTF60AHC | — | 2/4 | 60 | 32 | 33.63 | 115 | 1/2 | 7 | 14.39 | REMOVABLE |
| | WTFD60AHC-2 | 2 | 1/2 | | | | | | | | |
| | WTFD60AHC-4 | 4 | — | | | | | | | | |
| 2 | WTF60AHC-FIP | — | 2/4 | 60 | 32 | 33.63 | 115 | 1/2 | 7 | 14.39 | FOAM |
| | WTFD60AHC-2-FIP | 2 | 1/2 | | | | | | | | |
| | WTFD60AHC-4-FIP | 4 | — | | | | | | | | |
| 2 | WTF60AHC-FLT | — | 2/4 | 60 | 32 | 29.63 | 115 | 1/2 | 7 | 14.39 | FLAT TOP |
| | WTFD60AHC-2-FLT | 2 | 1/2 | | | | | | | | |
| | WTFD60AHC-4-FLT | 4 | — | | | | | | | | |

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles and rear bumpers.

WORKTOPS

Shallow Depth Freezers (Rear-Mounted)

FREEZERS (SHALLOW DEPTH)

MAINTAINS PRODUCT TEMPERATURE AT 0° F AND BELOW.

| SECTIONS | MODEL # | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | BACK SPLASH |
|----------|-------------|-------------------|-------|-------|--------|-------|-----|------|---------------|-------------|
| 1 | WTF20HC | 1/2 | 20 | 24.5 | 30.13 | 115 | 1/4 | 2.5 | 2.34 | REMOVABLE |
| | WTF20HC-FIP | 1/2 | 20 | 24.5 | 30.13 | 115 | 1/4 | 2.5 | 2.34 | FOAM |
| | WTF20HC-FLT | 1/2 | 20 | 24.5 | 26.13 | 115 | 1/4 | 2.5 | 2.34 | FLAT TOP |
| 1 | WTF27HC | 1/2 | 27 | 29.88 | 33.63 | 115 | 1/4 | 2.5 | 5.25 | REMOVABLE |
| | WTF27HC-FIP | 1/2 | 27 | 29.88 | 33.63 | 115 | 1/4 | 2.5 | 5.25 | FOAM |
| | WTF27HC-FLT | 1/2 | 27 | 29.88 | 29.63 | 115 | 1/4 | 2.5 | 5.25 | FLAT TOP |

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles and rear bumpers.



WTR34HC-23-25

ORDER YOUR UNIT TO YOUR SPECIFICATIONS WITH AVAILABLE OPTIONS SUCH AS:

GLASS DOORS (-25)

Increase visibility by swapping the solid doors with glass doors on select refrigerator and freezer models.

3-INCH CASTERS (-23)

Lower the height of the unit for workflow or ADA compliance by selecting the 3-inch casters instead of the standard 6-inch ones.

Rear-Mounted Dual-Temps

DUAL-TEMPS

MAINTAINS PRODUCT TEMPERATURES OF
36-38°F (REFRIGERATOR), AND 0°F (FREEZER).

| SECTIONS | MODEL # | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | BACK SPLASH |
|----------|-----------|-------------------|-------|-------|--------|-------|------------------|------------------|--------------------|-------------|
| 2 | WTRF48AHC | 2/4 | 48 | 32 | 33.63 | 115 | R: 1/6 F: 1/4 | R: 2.0 F: 2.5 | L: 5.31 R: 5.31 | REMOVABLE |
| | WTFR48AHC | | | | | | | | | |

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles and rear bumpers.
 "RF" in the model # designates refrigerator on the left, freezer on the right.
 "FR" in the model # designates freezer on the left, refrigerator on the right.



WTFR48AHC

WORKTOPS

Side-Mounted

REFRIGERATORS - SIDE MOUNTED

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DRAWERS | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | BACK SPLASH |
|----------|--------------|---------|-------------------|-------|-------|--------|-------|-----|------|---------------|-------------|
| 1 | WTR41AHC | - | 1/2 | 41 | 34 | 33.5 | 115 | 1/6 | 2.2 | 7.94 | FOAM |
| 1 | WTR46AHC | - | 1/2 | 46 | 34 | 33.5 | 115 | 1/6 | 3 | 10.8 | FOAM |
| | WTRD46AHC-2 | 2 | - | | | | | | | | |
| 2 | WTR67AHC | - | 2/4 | 67 | 34 | 33.5 | 115 | 1/5 | 3 | 18.97 | FOAM |
| | WTRD67AHC-2 | 2 | 1/2 | | | | | | | | |
| | WTRD67AHC-4 | 4 | - | | | | | | | | |
| 3 | WTR93AHC | - | 3/6 | 93 | 34 | 33.5 | 115 | 1/3 | 5 | 29.7 | FOAM |
| | WTRD93AHC-2 | 2 | 2/4 | | | | | | | | |
| | WTRD93AHC-4 | 4 | 1/2 | | | | | | | | |
| | WTRD93AHC-6 | 6 | - | | | | | | | | |
| 4 | WTR119AHC | - | 4/8 | 119 | 34 | 33.5 | 115 | 1/3 | 5 | 40.12 | FOAM |
| | WTRD119AHC-2 | 2 | 3/6 | | | | | | | | |
| | WTRD119AHC-4 | 4 | 2/4 | | | | | | | | |
| | WTRD119AHC-6 | 6 | 1/2 | | | | | | | | |
| | WTRD119AHC-8 | 8 | - | | | | | | | | |

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles and rear bumpers.

FREEZERS - SIDE MOUNTED

MAINTAINS PRODUCT TEMPERATURE AT 0° F AND BELOW.

| SECTIONS | MODEL # | DRAWERS | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | BACK SPLASH |
|----------|----------|---------|-------------------|-------|-------|--------|-------|-----|------|---------------|-------------|
| 2 | WTF67AHC | - | 2/4 | 67 | 34 | 33.5 | 115 | 3/4 | 8.9 | 20.8 | FOAM |

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles and rear bumpers.

REAR MOUNT VERSUS SIDE MOUNT

REAR MOUNTED COMPRESSOR UNITS

Worktops and undercounter units that have a rear mounted compressor offer the advantage of a compressed footprint on the kitchen floorplan.



WTRD72AHC-4

SIDE MOUNTED COMPRESSOR UNITS

Worktops and undercounter units that have a side mounted compressor are a little wider than rear mounted units, but gain a considerable amount of interior cubic capacity. Side mount worktop units come standard with a 16-gauge stainless steel top.



WTRD93AHC-4

UNDERCOUNTERS

Refrigerators & Freezers



**Designed to perform in
high ambient conditions**

**7 year warranty on parts,
labor, and compressor**

Made in USA

Undercounter units feature a 1/2" thick sub-top

Mechanical or Full electronic control

- Mechanical controller standard in refrigerator units sizes 20-34
- Full electronic controller standard in refrigerator units sizes 36 and higher, and in all freezer and dual-temp units

Interior thermometer

Self-closing doors

with 120° stay-open feature, on cartridge style hinges

Easy door removal for service and cleaning

Magnetic gasket attached to each door
for positive seal

6" heavy duty casters standard

3" casters or 6" leg option available
at no charge when specified on order


Two epoxy-coated steel wire shelves
per section

Field-reversible doors



On select models




DRAWER PAN CONFIGURATIONS for UCRD and UCFD units

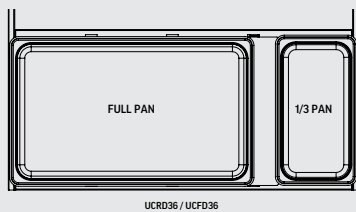

UCRD36 / UCFD36


UCRD27 / UCRD32 / UCRD60
UCFD27 / UCFD32 / UCFD60


UCRD48 / UCRD72 / UCFD48


UCRD46 / UCRD67 / UCRD93 / UCRD119
UCFD46 / UCFD67 / UCFD93 / UCFD119

EXTERIOR FINISHES

- Stainless steel with galvanized back
- Stainless steel with stainless back

INTERIOR FINISHES

- Corrosion-resistant aluminum
- Stainless steel

AVAILABLE OPTIONS

- Left hinge doors
- Remote models available
- Glass doors (rear-mount units only)
- Electronic controllers
(for refrigerator units sizes 20-34)

AVAILABLE ACCESSORIES

- Bun tray rack
- Locks (doors only, spec at time of order)

MOUNTING OPTIONS

- 6" casters
- 3" casters (allows for ADA compliant working height)
- 6" legs

AGENCY CERTIFICATIONS



3" CASTERS AVAILABLE
at no charge when specified at the
time of order



FIELD-REVERSIBLE DOORS
for layout flexibility

AVAILABLE IN REAR MOUNTED AND SIDE MOUNTED SYSTEMS, WITH SOLID OR GLASS DOORS



UNDERCOUNTERS

Rear-Mounted Refrigeration

REFRIGERATORS - REAR MOUNTED

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DRAWERS | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET |
|----------|-------------|---------|-------------------|-------|-------|--------|-------|------|------|---------------|
| 1 | UCR24AHC | — | 1/2 | 24 | 32 | 28.63 | 115 | 1/10 | 2 | 5.16 |
| 1 | UCR27AHC | — | 1/2 | 27 | 32 | 28.63 | 115 | 1/10 | 2 | 6.13 |
| | UCRD27AHC-2 | 2 | — | | | | | | | 6.13 |
| 1 | UCR32AHC | — | 1/2 | 32 | 32 | 28.63 | 115 | 1/10 | 2 | 7.2 |
| | UCRD32AHC-2 | 2 | — | | | | | | | 7.2 |
| 2 | UCR36AHC | — | 2/4 | 36 | 32 | 28.63 | 115 | 1/6 | 2 | 8.5 |
| | UCRD36AHC-2 | 2 | — | | | | | | | 8.5 |
| 2 | UCR48AHC | — | 2/4 | 48 | 32 | 28.63 | 115 | 1/6 | 2 | 11.82 |
| | UCRD48AHC-2 | 2 | 1/2 | | | | | | | 11.6 |
| | UCRD48AHC-4 | 4 | — | | | | | | | 11.6 |
| 2 | UCR60AHC | — | 2/4 | 60 | 32 | 28.63 | 115 | 1/5 | 3 | 14.75 |
| | UCRD60AHC-2 | 2 | 1/2 | | | | | | | 14.4 |
| | UCRD60AHC-4 | 4 | — | | | | | | | 14.4 |
| 3 | UCR72AHC | — | 3/6 | 72 | 32 | 28.63 | 115 | 1/5 | 3 | 17.88 |
| | UCRD72AHC-2 | 2 | 2/4 | | | | | | | 17.1 |
| | UCRD72AHC-4 | 4 | 1/2 | | | | | | | 17.1 |
| | UCRD72AHC-6 | 6 | — | | | | | | | 17.1 |

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles and rear bumpers.

Shallow Depth Refrigeration (Rear-Mounted)

REFRIGERATORS (SHALLOW DEPTH)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET |
|----------|---------|-------------------|-------|-------|--------|-------|------|------|---------------|
| 1 | UCR20HC | 1/2 | 20 | 24.5 | 25.13 | 115 | 1/10 | 2 | 2.25 |
| 1 | UCR24HC | 1/2 | 24 | 29.88 | 28.63 | 115 | 1/10 | 2 | 4.48 |
| 1 | UCR27HC | 1/2 | 27 | 29.88 | 28.63 | 115 | 1/10 | 2 | 5.25 |
| 2 | UCR34HC | 2/2 | 34 | 24.63 | 25.13 | 115 | 1/10 | 2 | 5.96 |

*For total height, add 3 or 6 inches, based on your mounting choice.
Depth measurement includes handles and rear bumpers.*



UNDERCOUNTERS

Rear-Mounted Freezers

FREEZERS - REAR MOUNTED

MAINTAINS PRODUCT TEMPERATURE AT 0° F AND BELOW.

| SECTIONS | MODEL # | DRAWERS | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET |
|----------|-------------|---------|-------------------|-------|-------|--------|-------|------|------|---------------|
| 1 | UCF24AHC | — | 1/2 | 24 | 32 | 28.63 | 115 | 1/4 | 2.5 | 4.9 |
| 1 | UCF27AHC | — | 1/2 | 27 | 32 | 28.63 | 115 | 1/4 | 2.5 | 6.13 |
| | UCFD27AHC-2 | 2 | — | | | | | | | 6.13 |
| 1 | UCF32AHC | — | 1/2 | 32 | 32 | 28.63 | 115 | 1/3+ | 4 | 7.2 |
| | UCFD32AHC-2 | 2 | — | | | | | | | 7.2 |
| 2 | UCF36AHC | — | 2/4 | 36 | 32 | 28.63 | 115 | 1/2 | 6 | 8.7 |
| | UCFD36AHC-2 | 2 | — | | | | | | | 8.7 |
| 2 | UCF48AHC | — | 2/4 | 48 | 32 | 28.63 | 115 | 1/2 | 7 | 11.04 |
| | UCFD48AHC-2 | 2 | 1/2 | | | | | | | 11.6 |
| | UCFD48AHC-4 | 4 | — | | | | | | | 11.6 |
| 2 | UCF60AHC | — | 2/4 | 60 | 32 | 28.63 | 115 | 1/2 | 7 | 14.39 |
| | UCFD60AHC-2 | 2 | 1/2 | | | | | | | 15.8 |
| | UCFD60AHC-4 | 4 | — | | | | | | | 15.8 |

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles and rear bumpers.

Shallow Depth Freezers (Rear-Mounted)

FREEZERS (SHALLOW DEPTH)

MAINTAINS PRODUCT TEMPERATURE AT 0° F AND BELOW.

| SECTIONS | MODEL # | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET |
|----------|---------|-------------------|-------|-------|--------|-------|-----|------|---------------|
| 1 | UCF20HC | 1/2 | 20 | 24.5 | 25.13 | 115 | 1/4 | 2.5 | 2.34 |
| 1 | UCF24HC | 1/2 | 24 | 29.88 | 28.63 | 115 | 1/4 | 2.5 | 4.53 |
| 1 | UCF27HC | 1/2 | 27 | 29.88 | 28.63 | 115 | 1/4 | 2.5 | 5.25 |

For total height, add 3 or 6 inches, based on your mounting choice.
Depth measurement includes handles and rear bumpers.

Rear-Mounted Dual-Temps

DUAL-TEMPS

MAINTAINS PRODUCT TEMPERATURES OF
36-38°F (REFRIGERATOR), AND 0°F (FREEZER).

| SECTIONS | MODEL # | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET |
|----------|-----------|-------------------|-------|-------|--------|-------|------------------|------------------|--------------------|
| 2 | UCRF48AHC | 2/4 | 48 | 32 | 28.63 | 115 | R: 1/6 F: 1/4 | R: 2.0 F: 2.5 | L: 5.31 R: 5.31 |
| | UCFR48AHC | | | | | | | | |

*For total height, add 3 or 6 inches, based on your mounting choice.
Depth measurement includes handles and rear bumpers.
"RF" in the model # designates refrigerator on the left, freezer on the right.
"FR" in the model # designates freezer on the left, refrigerator on the right.*



UCRF48AHC

UNDERCOUNTERS

Side-Mounted

REFRIGERATORS - SIDE MOUNTED

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DRAWERS | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET |
|----------|--------------|---------|-------------------|-------|-------|--------|-------|-----|------|---------------|
| 1 | UCR41AHC | - | 1/2 | 41 | 34.75 | 28.5 | 115 | 1/5 | 2 | 7.94 |
| 1 | UCR46AHC | - | 1/2 | 46 | 34.75 | 28.5 | 115 | 1/5 | 2 | 10.8 |
| | UCRD46AHC-2 | 2 | - | | | | | | | 10.8 |
| 2 | UCR67AHC | - | 2/4 | 67 | 34.75 | 28.5 | 115 | 1/5 | 2 | 18.97 |
| | UCRD67AHC-2 | 2 | 1/2 | | | | | | | 19.2 |
| | UCRD67AHC-4 | 4 | - | | | | | | | 19.2 |
| 3 | UCR93AHC | - | 3/6 | 93 | 34.75 | 28.5 | 115 | 1/3 | 5 | 29.7 |
| | UCRD93AHC-2 | 2 | 2/4 | | | | | | | 29.7 |
| | UCRD93AHC-4 | 4 | 1/2 | | | | | | | 29.7 |
| | UCRD93AHC-6 | 6 | - | | | | | | | 29.7 |
| 4 | UCR119AHC | - | 4/8 | 119 | 34.75 | 28.5 | 115 | 1/3 | 5 | 40.12 |
| | UCRD119AHC-2 | 2 | 3/6 | | | | | | | 40.5 |
| | UCRD119AHC-4 | 4 | 2/4 | | | | | | | 40.5 |
| | UCRD119AHC-6 | 6 | 1/2 | | | | | | | 40.5 |
| | UCRD119AHC-8 | 8 | - | | | | | | | 40.5 |

For total height, add 3 or 6 inches, based on your mounting choice. Depth measurement includes handles and rear bumpers.

FREEZERS - SIDE MOUNTED

MAINTAINS PRODUCT TEMPERATURE AT 0° F AND BELOW.

| SECTIONS | MODEL # | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET |
|----------|----------|-------------------|-------|-------|--------|-------|-----|------|---------------|
| 2 | UCF67AHC | 2/4 | 67 | 34.75 | 28.5 | 115 | 3/4 | 6.4 | 20.8 |

For total height, add 3 or 6 inches, based on your mounting choice.
Depth measurement includes handles and rear bumpers.



UCR27AHC-25-09-23

Worktop & Undercounter Accessories

| DESCRIPTION | UNIT(S) | PART NUMBER |
|---|---|---------------|
| SHELVING / ORGANIZERS | | |
| Epoxy Coated Wire Shelf (Large) | UCF/UCR/WTF/WTR27A | 403-826B |
| Epoxy Coated Wire Shelf (Small) | UCF/UCR/WTF/WTR27A | 403-912D-01 |
| Epoxy Coated Wire Shelf (Large) | UCF/UCR/WTF/WTR36A | 403-911D-01 |
| Epoxy Coated Wire Shelf (Small) | UCF/UCR/WTF/WTR36A | 403-915D-01 |
| Epoxy Coated Wire Shelf (Large) | UCF/UCR/WTF/WTR48A | 403-828B |
| Epoxy Coated Wire Shelf (Small) | UCF/UCR/WTF/WTR48A | 403-913D-01 |
| Epoxy Coated Wire Shelf (Large) | UCF/UCR/WTF/WTR60A | 403-829B |
| Epoxy Coated Wire Shelf (Small) | UCF/UCR/WTF/WTR60A | 403-914D-01 |
| Epoxy Coated Ctr Section Wire Shelf (Large) | UCR/WTR72A | 403-827B |
| Epoxy Coated Wire Shelf L&R (Large) | UCR/WTR72A | 403-828B |
| Epoxy Coated Ctr Section Wire Shelf (Small) | UCR/WTR72A | 403-912D-01 |
| Epoxy Coated Wire Shelf L&R (Small) | UCR/WTR72A | 403-913D-01 |
| Epoxy Coated Wire Shelf | UCR46A/67A, UCF67A | 403-834D |
| Epoxy Coated Wire Shelf | UCR93A/119A | 403-834D |
| Epoxy Coated Wire Shelf | WTR41/46/67A/93A | 403-834D |
| Epoxy Coated Wire Shelf | WTR119A, WTF67A | 403-834D |
| Epoxy Coated Wire Shelf | UCF/UCR/WTR20 | 403-419D |
| Epoxy Coated Wire Shelf | UCR/WTR34Y | 403-339D |
| Epoxy Coated Wire Shelf | UCR/UCF/WTF/WTR27 Shallow Depth | 403-294D |
| Shelf Clip | UCR/WTR/UCRD/WTRD | 403-169A |
| Large Wire Shelf Divider | WTR27A/UCR27A | 403-722C |
| Small Wire Shelf Divider | WTR27A/UCR27A | 403-721C |
| Large Wire Shelf Divider | WTR36A, UCR36A | 403-723C |
| Small Wire Shelf Divider | WTR36A, UCR36A | 403-721C |
| Large Wire Shelf Divider | WTR48A/UCR48A | 403-723C |
| Small Wire Shelf Divider | WTR48A/UCR48A | 403-721C |
| Large Wire Shelf Divider | WTR60A/UCR60A | 403-723C |
| Small Wire Shelf Divider | WTR60A/UCR60A | 403-721C |
| Large Wire Shelf Divider | WTR72A/UCR72A | 403-723C |
| Small Wire Shelf Divider | WTR72A/UCR72A | 403-721C |
| STACKING COLLARS | | |
| Stacking Collar | UCR20HC, UCF20HC | 00C32-015A-01 |
| Wall Mount Shelf | UCR20HC, UCF20HC (3/16" anchors recommended for mounting) | 00A24-136D-05 |
| Stacking Collar | UCR27HC, UCF27HC | 00C32-004A |
| Stacking Collar | UCR27AHC, UCF27AHC | 00C32-012A |

| DESCRIPTION | UNIT(S) | PART NUMBER |
|-------------------------|---|-------------|
| MOUNTING | | |
| 3" Caster | UCR20,UCF20,UCR27,UCF27,UCR34 | 00C31-041A |
| 6" Caster | UCR20,UCF20,UCR27,UCF27,UCR34 | 00C31-038A |
| 3" Caster | 29" Undercounter/Worktop (set of four) | 00C31-041A |
| 6" Caster | 29" Undercounter/Worktop (set of four) | 00C31-038A |
| 3" Caster | 32" Undercounter/Worktop (set of four) | 61C01-013A |
| 6" Caster | 32" Undercounter/Worktop (set of four) | 61C01-001A |
| 3" Caster | UCR/WTR 119A (set of six) | 61C01-012A |
| 6" Black Leg | 29" Undercounter/Worktop (set of four) | 58B02-001A |
| 6" Black Leg | 32" Undercounter/Worktop (set of four) | 58B02-001A |
| 6" Black Leg | UCR/WTR 119A (set of six) | 58B02S002A |
| 6" Seismic/Flanged Legs | 29" WT/UC (set of four) | 00C31-055A |
| 6" Seismic/Flanged Legs | 32" WT/UC (set of four) | 00C31-055A |
| 6" Seismic/Flanged Legs | UC Shallow Depth (set of four) | 00C31-055A |
| 2 3/4 in Caster Kit | WT/UC | 00C31-049A |
| 2" Roller Kit | WT/UC | 00C31-045A |

| | | |
|---|---------------|---------------|
| WORKTOP WHITE POLY CUTTING BOARDS (1/2" THICK) | | |
| Set of (2) Brackets Required | All Units | 00C23-076A-01 |
| 29" Cutting Board | WTR27A/WTF27A | 705-397D-05 |
| 29" Cutting Board | WTR36A/WTF36A | 705-397D-19 |
| 29" Cutting Board | WTR48A/WTF48A | 705-397D-06 |
| 29" Cutting Board | WTR60A/WTF60A | 705-397D-07 |
| 29" Cutting Board | WTR72A/WTF72A | 705-397D-08 |

| | | |
|--|---------------|---------------|
| COMPOSITE CUTTING BOARDS (1/2" THICK) | | |
| Set of (2) Brackets Required | All Units | 00C23-076A-01 |
| Composite Cutting Board | WTR27A/WTF27A | 705-397D-03 |
| Composite Cutting Board | WTR36A/WTF36A | 705-397D-17 |
| Composite Cutting Board | WTR41 | 705-397D-18 |
| Composite Cutting Board | WTR48A/WTF48A | 705-397D-02 |
| Composite Cutting Board | WTR60A/WTF60A | 705-397D-04 |
| Composite Cutting Board | WTR72A | 705-397D-01 |

| | | |
|-------------------------------|--------------------------------------|------------|
| ADDITIONAL ACCESSORIES | | |
| Door Lock (solid doors only) | UCR,WTR (per door; solid doors only) | 00C30-099A |



CHEF BASES

AMPLE COLD STORAGE WHILE SUPPORTING WORK SPACES



**CROSS TEMP UNITS
NOW AVAILABLE!**



CHEF BASES

Refrigerators & Freezers



Designed to perform in high ambient conditions

7 year warranty on parts, labor, and compressor

LIFETIME WARRANTY on all drawers and slides (parts only)

12-gauge stainless steel drawer slides with Delrin® rollers rated at 275 lbs

Heavy-duty, fireproof, insulated 16-gauge top
No additional heat-shield required.
(must adhere to manufacturer's clearance)

Compressor available on left or right side
(specify at time of order)

Consistent product temperature with intelligent airflow design

Innovative drawer systems for easier installation, field adjustment, and increased pan capacity

Full refrigeration system serviceability from the front of the cabinet, eliminating the need to remove the lid

Accommodates 6-inch-deep full-size food service pans in top & bottom drawers

Featuring environmentally friendly energy-efficient R290 refrigerant





Optional overhang top
(up to 6-inches on either side)

EXTERIOR FINISHES

- Stainless steel with galvanized back

INTERIOR FINISHES

- Corrosion-resistant aluminum
- Stainless steel

AVAILABLE OPTIONS

- Flat Top edge in lieu of marine edge on standard sizes
- Remote models available

AVAILABLE ACCESSORIES

- Custom flat top sizes available, up to 6" overhang on either side to create a custom sized top
- Gasket guards

MOUNTING OPTIONS

- 6" casters
- 3" casters (allows for ADA compliant working height)
- 6" legs

AGENCY CERTIFICATIONS



12-GAUGE DRAWER SLIDES
with 3 Delrin encased stainless steel roller bearings per each drawer slide



ACCOMMODATES 6" PANS IN
top and bottom drawers



CHEF BASES


REFRIGERATORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DRAWERS | TOP WIDTH | CABINET WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | FULL SIZE PAN CAPACITY |
|----------|----------------|-----------------------|-----------|---------------|-------|--------|-------|-----|------|------------|------------------------|
| 1 | WTRCS36HC | 2 small | 36 | 36 | 34.75 | 24.38 | 120 | 1/6 | 1.7 | 5.64 | 4 |
| | WTRCS36HC-48 | | 48 | | | | | | | | |
| 1 | WTRCS48HC | 2 medium | 48 | 48 | 34.75 | 24.38 | 130 | 1/3 | 3.3 | 7.21 | 4 |
| 1 | WTRCS52HC | 2 medium | 52 | 52 | 34.75 | 24.38 | 130 | 1/3 | 3.3 | 8.06 | 4 |
| | WTRCS52HC-60 | | 60 | | | | | | | | |
| 1 | WTRCS60HC | 2 X-large | 60 | 60 | 34.75 | 24.38 | 130 | 1/3 | 3.3 | 9.75 | 6 |
| | WTRCS60HC-64 | | 64 | | | | | | | | |
| 2 | WTRCS72HC | 4 medium | 72 | 72 | 34.75 | 24.38 | 130 | 1/3 | 3.3 | 12.30 | 8 |
| | WTRCS72HC-76 | | 76 | | | | | | | | |
| 2 | WTRCS84HC | 2 medium 2 X-large | 84 | 84 | 34.75 | 24.38 | 130 | 1/3 | 4.3 | 14.84 | 10 |
| | WTRCS84HC-89 | | 89 | | | | | | | | |
| | WTRCS84HC-96 | | 96 | | | | | | | | |
| 2 | WTRCS96HC | 4 X-large | 96 | 96 | 34.75 | 24.38 | 130 | 1/3 | 4.3 | 17.60 | 12 |
| | WTRCS96HC-108 | | 108 | | | | | | | | |
| 3 | WTRCS112HC | 6 medium | 112 | 112 | 34.75 | 24.38 | 130 | 1/3 | 4.3 | 20.78 | 12 |
| | WTRCS112HC-120 | | 120 | | | | | | | | |

Height measurement includes casters. Depth measurement includes handles and rear bumpers.

DRAWER PAN CONFIGURATIONS
for Chef Base units

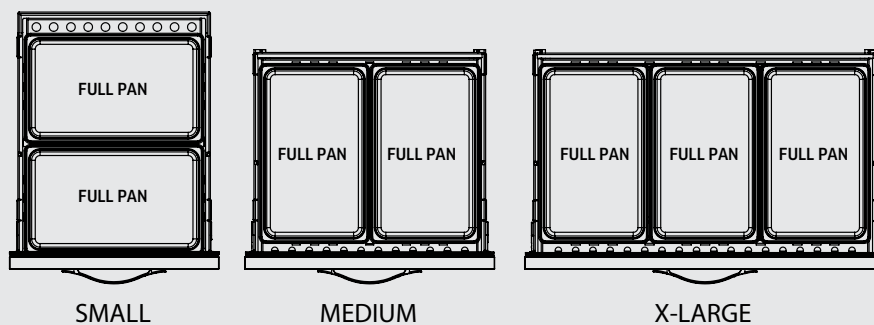

FREEZERS

MAINTAINS PRODUCT TEMPERATURE AT -10° F AND BELOW.

| SECTIONS | MODEL # | DRAWERS | TOP WIDTH | CABINET WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | FULL SIZE PAN CAPACITY |
|----------|--------------|-----------------------|-----------|---------------|-------|--------|-------|-----|------|------------|------------------------|
| 1 | WTFC36HC | 2 small | 36 | 36 | 34.75 | 24.38 | 100 | 1/2 | 4.5 | 5.64 | 4 |
| | WTFC36HC-48 | | 48 | | | | | | | | |
| 1 | WTFC48HC | 2 medium | 48 | 48 | 34.75 | 24.38 | 130 | 1/2 | 5 | 7.21 | 4 |
| 1 | WTFC52HC | 2 medium | 52 | 52 | 34.75 | 24.38 | 130 | 1/2 | 5 | 8.06 | 4 |
| | WTFC52HC-60 | | 60 | | | | | | | | |
| 1 | WTFC60HC | 2 X-large | 60 | 60 | 34.75 | 24.38 | 130 | 1/2 | 5 | 9.75 | 6 |
| | WTFC60HC-64 | | 64 | | | | | | | | |
| 2 | WTFC72HC | 4 medium | 72 | 72 | 34.75 | 24.38 | 130 | 1/2 | 5 | 12.30 | 8 |
| | WTFC72HC-76 | | 76 | | | | | | | | |
| 2 | WTFC84HC | 2 medium 2 X-large | 84 | 84 | 34.75 | 24.38 | 115 | 3/4 | 6.6 | 14.84 | 10 |
| | WTFC84HC-89 | | 89 | | | | | | | | |
| | WTFC84HC-96 | | 96 | | | | | | | | |
| 2 | WTFC96HC | 4 X-large | 96 | 96 | 34.75 | 24.38 | 115 | 3/4 | 6.6 | 17.60 | 12 |
| | WTFC96HC-108 | | 108 | | | | | | | | |

Height measurement includes casters. Depth measurement includes handles and rear bumpers.

CROSS TEMP® CHEF BASES

Convertible Refrigeration



Easily converts from refrigerator to freezer
with Beverage-Air's exclusive Cross Temp® technology



Variable speed compressor technology
achieves up to 30% more energy efficiency
compared to a single-speed

Temperature range of -15 to 40° F

Modulates coil temp to achieve desired set point
while achieving maximum energy efficiency

Single cabinet configurable to all menu initiatives

Intuitive compressor
adjusts for optimal effectiveness in high-use situations

Quicker pull-down
for both air and product temperatures

Improved product stability

Smart-defrost

Expansion valve

Rapid-recovery after defrost
consistent product temperature and ensures food quality

Featuring environmentally friendly
energy efficient R290 refrigerant

7 year warranty on parts,
labor, and compressor

CONTROL THE COLD

WHAT IS CROSS TEMP® TECHNOLOGY?

Cross Temp technology allows the user to easily switch the unit back and forth from refrigerator to freezer as needed, with a range of -15° to 40°F.

THE PURPOSE OF CROSS TEMP®

Simply put, Cross Temp technology lets the user get the most flexibility from the unit, by letting them switch from fridge to freezer as their menus change with the seasons and initiatives, including ice-cream storage.

IS CROSS TEMP ENERGY EFFICIENT?

The Cross Temp units are intuitive and self-adjust for optimal effectiveness based on usage. Even in high-usage situations, Cross Temp units adjust to maintain maximum energy efficiency.

HOW LONG DOES THE CONVERSION TAKE?

On average, a Cross Temp unit can convert from refrigerator to freezer or vice versa, in under an hour. (Conditions and results will vary)

CROSS TEMP CHEF BASES

CAN CONVERT BETWEEN FREEZER AND REFRIGERATOR
TEMPERATURES FROM -15° TO 40°F

| SECTIONS | MODEL # | DRAWERS | TOP WIDTH | CABINET WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | FULL SIZE PAN CAPACITY |
|----------|---------------|-----------|--------------|------------------|-------|--------|-------|-----|------|---------------|---------------------------|
| 1 | WTCTCS48HC | 2 medium | 48 | 48 | 34.75 | 24.38 | 150 | 4/5 | 8.7 | 7.21 | 4 |
| 1 | WTCTCS52HC | 2 medium | 52 | 52 | 34.75 | 24.38 | 150 | 4/5 | 8.7 | 8.06 | 4 |
| | WTCTCS52HC-60 | | 60 | | | | | | | | |
| 1 | WTCTCS60HC | 2 X-large | 60 | 60 | 34.75 | 24.38 | 150 | 4/5 | 8.7 | 9.75 | 6 |
| | WTCTCS60HC-64 | | 64 | | | | | | | | |
| 2 | WTCTCS72HC | 4 medium | 72 | 72 | 34.75 | 24.38 | 150 | 4/5 | 8.7 | 12.30 | 8 |
| | WTCTCS72HC-76 | | 76 | | | | | | | | |

Height measurement includes casters. Depth measurement includes handles and rear bumpers.



BAR & WINE EQUIPMENT

DYNAMIC PERFORMANCE THAT ENHANCES THE FRONT OF THE HOUSE



Direct Draws / Bar Mobiles



Back Bar Coolers



Bottle Coolers



Glass & Plate Chillers

DIRECT DRAWS



3-IN-1 DRAFT SOLUTIONS

Dispense beer, wine, or coffee (other non-alcoholic beverages) with the same tap—no line/manifold changes needed!

Wide variety of options and accessories

7 year warranty on parts, labor, and compressor

Made in USA

Stainless steel top with drip tray

Galvanized steel interior liner

with heavy duty stainless steel floor

Full electronic control

(except DD24 which has mechanical control)

Drain tube located at bottom front of cooler

connects to floor drain

Self-closing doors with locks

Magnetic gasket attached to each door

for positive seal

Field-reversible door

Compressor available on left or right side

specify at time of order



LEFT OR RIGHT COMPRESSOR

Specify which side the compressor should be located at time of order



DRAIN TUBE

bottom front of cooler (condensor side) and connects directly to floor drain

REFRIGERATED UNITS


MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DOORS | # OF STRAIGHT WALL KEGS | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | COLOR |
|----------|------------|-------|-------------------------|-------|-------|--------|-------|-----|------|------------|-----------------|
| 1 | DD24HC-1-B | 1 | 1 | 24 | 30.13 | 37.75 | 115 | 1/6 | 2 | 7.66 | BLACK |
| | DD24HC-1-S | | | | | | | | | | STAINLESS FRONT |
| 1 | DD36HC-1-B | 1 | 1 | 36 | 24.5 | 36 | 115 | 1/4 | 2.5 | 8.31 | BLACK |
| | DD36HC-1-S | | | | | | | | | | STAINLESS |
| 2 | DD48HC-1-B | 2 | 2 | 48 | 24.5 | 36 | 115 | 1/4 | 2.50 | 12.4 | BLACK |
| | DD48HC-1-S | | | | | | | | | | STAINLESS |
| 2 | DD50HC-1-B | 2 | 2 | 50.5 | 29 | 37.38 | 115 | 1/4 | 2.50 | 17.86 | BLACK |
| | DD50HC-1-S | | | | | | | | | | STAINLESS FRONT |
| 2 | DD58HC-1-B | 2 | 3 | 59 | 29 | 37.38 | 115 | 1/4 | 2.50 | 21.86 | BLACK |
| | DD58HC-1-S | | | | | | | | | | STAINLESS FRONT |
| 2 | DD68HC-1-B | 2 | 3 | 69 | 29 | 37.38 | 115 | 1/3 | 5.5 | 25.93 | BLACK |
| | DD68HC-1-S | | | | | | | | | | STAINLESS FRONT |
| 3 | DD72HC-1-B | 3 | 3 | 72 | 24.5 | 36 | 115 | 1/3 | 3.1 | 19.95 | BLACK |
| | DD72HC-1-S | | | | | | | | | | STAINLESS |
| 3 | DD78HC-1-B | 3 | 4 | 79 | 29 | 37.38 | 115 | 1/3 | 5.5 | 33.59 | BLACK |
| | DD78HC-1-S | | | | | | | | | | STAINLESS FRONT |
| 3 | DD94HC-1-B | 3 | 5 | 95 | 29 | 37.38 | 115 | 1/3 | 5.5 | 37.82 | BLACK |
| | DD94HC-1-S | | | | | | | | | | STAINLESS FRONT |

Depth measurement includes handles. Height measurement includes mounting height (DD24 only), but excludes tap height. Add average tap height of 15" for total unit height.

12-Tap Tower Option

Available for DD78 and DD94.

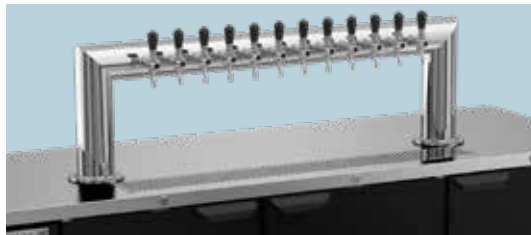

Club Top Option

Adds sliding lid(s) to top. Available for DD50, DD58 and DD68.



EXTERIOR FINISHES

- Black
- Stainless Steel

INTERIOR FINISHES

- Galvanized walls with reinforced stainless steel floor
- Stainless steel

AVAILABLE OPTIONS

- Left or right side compressor
- Remote models available

AVAILABLE ACCESSORIES

- Wine Models
- Wine Taps
- Faucet Locks
- Glass Rinser (does not fit Club Tops)
- 1-6 Insulated Stainless Towers/Taps
- Optional 12 Tap Tower for DD78 & 94
- Dual Tap Placement Option
- No Draft Arm with Hole Cover
- Club Top available on DD50, 58, & 68

MOUNTING OPTIONS

- 6" casters
- 3" casters
- 6" legs


AGENCY CERTIFICATIONS




DIRECT DRAWS

Keg Capacities


DD24 / DD36




DD48 / DD50

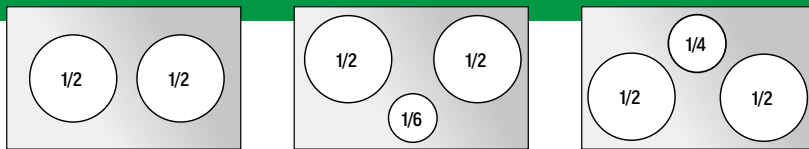


DD58 / DD68 / DD72



DD78



DD94



RC-500 SERIES RAPID CHILL GLASS FROSTER

Freeze any type of glass in a flash

Ideal for chilling beer, champagne, wine, and cocktail glasses

Also ideal for chilling the exterior of bottles

Simply push down on the froster head to dispense jet of CO2

Neon, color changing lights illuminate the glass as you frost

Does not taint the taste of drinks

RC-500 mounts to any table or bar counter

Sterilizes the glass due to the cooling process, for a more hygienic drink service

Will not affect the carbonation or temperature of drinks

No need for electrical connection, for greater portability and practicality

LED lights require (2) AA batteries

Requires food grade CO2 cylinders with liquid dip tube (siphon tank)

| MODEL # | WIDTH | DEPTH | HEIGHT | CRATED WEIGHT |
|---------|-------|-------|--------|---------------|
| RC-500 | 10.63 | 5.11 | 16.14 | 12 |



BAR MOBILES



Wide variety of options and accessories

**7 year warranty on parts,
labor, and compressor**

Made in USA

Stainless steel drip tray for easy cleaning

Heavy-duty stainless steel floor

Stainless steel top with black glass rails

4" casters

Mechanical control - BM23

Full electronic control - DZ24

Interior thermometer

Tower has continuous source of cold air

Portable unit with waste bottle

for beer and wine from drain

Self-closing doors with locks

Field-reversible door

Magnetic gasket attached to each door

for positive seal



PORTABLE WASTE BOTTLE

for beer and wine from drain



STAINLESS STEEL DRIP TRAY

for easy cleaning

REFRIGERATED UNITS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DOORS | # OF STRAIGHT WALL KEGS | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | COLOR |
|----------|-------------|-------|-------------------------|-------|-------|--------|-------|-----|------|------------|-----------|
| 1 | BM23HC-B | 1 | 1 | 24 | 30.13 | 53 | 115 | 1/6 | 2 | 7.66 | BLACK |
| | BM23HC-B-28 | 1 | 1 | 24 | 30.13 | 39.37 | 115 | 1/6 | 2 | 7.66 | BLACK |
| | BM23HC-S-31 | 1 | 1 | 24 | 30.13 | 53 | 115 | 1/6 | 2 | 7.66 | STAINLESS |
| | BM23HC-C-B | 1 | 1 | 24 | 30.13 | 53.25 | 115 | 1/6 | 2 | 7.66 | BLACK |
| | BM23HC-C-S | 1 | 1 | 24 | 30.13 | 53.25 | 115 | 1/6 | 2 | 7.66 | STAINLESS |

Depth measurement includes handles. Height measurement includes mounting height and tap height if applicable.

DUAL ZONE Not intended for beer/beer configuration.

LEFT COMPARTMENT MAINTAINS 32-40°F.
RIGHT COMPARTMENT MAINTAINS 50-65°F.

| SECTIONS | MODEL # | DOORS | # OF STRAIGHT WALL KEGS | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | COLOR |
|----------|------------|-------|-------------------------|-------|-------|--------|-------|-----|------|------------------|-----------|
| 1 | DZ24HC-1-B | 1 | (4) 1/6 | 24 | 30.75 | 52.75 | 115 | 1/6 | 1.7 | L 3.72 R 3.72 | BLACK |
| | DZ24HC-1-S | | | | | | | | | | STAINLESS |

Depth measurement includes handles. Height measurement includes mounting height and tap height if applicable.



AIR FLOW DAMPERS

The two air flow dampers in the DZ24HC allow for the adjustment of the temperature in the right side of the unit

EXTERIOR FINISHES

- Black
- Stainless Steel

INTERIOR FINISHES

- Galvanized walls with reinforced stainless steel floor
- Stainless steel

AVAILABLE OPTIONS

- Outdoor approved unit available (BM23 only)

AVAILABLE ACCESSORIES

- Club top (BM23 only)
- 1-4 insulated stainless towers/taps
- Wine models available
- 2, 3, or 4-way manifolds
- Faucet locks
- No draft arm with hole cover

MOUNTING OPTIONS

- 4" casters

AGENCY CERTIFICATIONS



BACK BAR COOLERS



Wide variety of options and accessories

**7 year warranty on parts,
labor, and compressor**

Made in USA

Galvanized Steel Interior

Stainless Steel Floor

Full electronic control

(except BB24 which has mechanical control)

Compressor Available on Left or Right Side

specify at time of order
right side only on pass-thru models

LED Lighting

Two Epoxy Coated Shelves per section

Stay Open Door and Locks

Field-reversible Doors

on select models

Sliding Glass Doors

on select models (door frames only come in black)

Pass Thru Models Available


Magnetic gasket attached to each door

for positive seal



DOOR OPTIONS

- Solid doors (hinged)
- Glass doors (hinged)
- Glass doors (sliding)

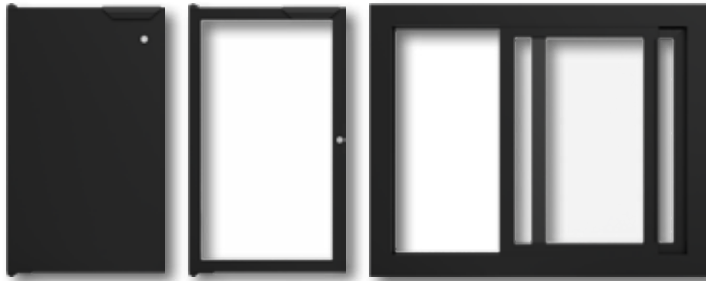

EXTERIOR FINISHES

- Black
- Stainless Steel front/sides
- Stainless steel front with gray painted steel sides

INTERIOR FINISHES

- Galvanized steel with reinforced stainless steel floor
- Stainless steel

AVAILABLE OPTIONS

- Left or right side compressor (right side only on pass-thru's)
- Remote models available

AVAILABLE ACCESSORIES

- Wine models available
- Food rated models
- Glass door
- Stainless steel top and galvanized sub-tops available
- Extra shelves

MOUNTING OPTIONS

- 6" casters
- 3" casters
- 6" legs

AGENCY CERTIFICATIONS



LEFT OR RIGHT COMPRESSOR

Specify which side the compressor should be located at time of order; right side only on pass-thru's



OPEN FOOD RATED MODELS

for increased storage options

AVAILABLE IN REACH-IN OR PASS-THRU, WITH OR WITHOUT TOP, WITH OR WITHOUT OPEN FOOD RATED



BACK BAR COOLERS

Standard

SOLID DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DOORS/ SHELVES | # OF STRAIGHT WALL KEGS | 12oz CANS | 12oz BOTTLES | LONGNECK BOTTLES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | COLOR |
|----------|---------------|-------------------|-------------------------------|--------------|-----------------|---------------------|-------|-------|--------|-------|-----|------|---------------|--------------------|
| 1 | BB24HC-1-B | 1/2 | 1 | 180 | 140 | 110 | 24 | 30.13 | 37.75 | 115 | 1/6 | 2 | 7.66 | BLACK |
| | BB24HC-1-S | | | | | | | | | | | | | STAINLESS FRONT |
| 1 | BB36HC-1-B | 1/2 | 1 | 240 | 220 | 170 | 36 | 24.5 | 34 | 115 | 1/4 | 2.5 | 8.31 | BLACK |
| | BB36HC-1-S | | | | | | | | | | | | | STAINLESS |
| 1 | BB36HC-1-B-27 | 1/2 | 1 | 240 | 220 | 170 | 36 | 24.5 | 36 | 115 | 1/4 | 2.5 | 8.31 | BLACK |
| | BB36HC-1-S-27 | | | | | | | | | | | | | STAINLESS |
| 2 | BB48HC-1-B | 2/4 | 2 | 288 | 300 | 325 | 48 | 24.5 | 34 | 115 | 1/4 | 2.5 | 12.4 | BLACK |
| | BB48HC-1-S | | | | | | | | | | | | | STAINLESS |
| 2 | BB48HC-1-B-27 | 2/4 | 2 | 288 | 300 | 325 | 48 | 24.5 | 36 | 115 | 1/4 | 2.5 | 12.4 | BLACK |
| | BB48HC-1-S-27 | | | | | | | | | | | | | STAINLESS |
| 2 | BB58HC-1-B | 2/4 | 2 | 528 | 440 | 365 | 59 | 29.13 | 37.25 | 115 | 1/4 | 2.5 | 21.86 | BLACK |
| | BB58HC-1-S | | | | | | | | | | | | | STAINLESS FRONT |
| 2 | BB68HC-1-B | 2/4 | 3 | 672 | 550 | 435 | 69 | 29.13 | 37.25 | 115 | 1/3 | 5.3 | 25.93 | BLACK |
| | BB68HC-1-S | | | | | | | | | | | | | STAINLESS FRONT |
| 3 | BB72HC-1-B | 3/6 | 3 | 540 | 480 | 505 | 72 | 24.5 | 34 | 115 | 1/3 | 3.1 | 19.92 | BLACK |
| | BB72HC-1-S | | | | | | | | | | | | | STAINLESS |
| 3 | BB72HC-1-B-27 | 3/6 | 3 | 540 | 480 | 505 | 72 | 24.5 | 36 | 115 | 1/3 | 3.1 | 19.92 | BLACK |
| | BB72HC-1-S-27 | | | | | | | | | | | | | STAINLESS |
| 3 | BB78HC-1-B | 3/6 | 4 | 740 | 630 | 560 | 79 | 29.13 | 37.25 | 115 | 1/3 | 5.5 | 33.59 | BLACK |
| | BB78HC-1-S | | | | | | | | | | | | | STAINLESS FRONT |
| 3 | BB94HC-1-B | 3/6 | 5 | 920 | 785 | 675 | 95 | 29.13 | 37.25 | 115 | 1/3 | 5.5 | 37.82 | BLACK |
| | BB94HC-1-S | | | | | | | | | | | | | STAINLESS FRONT |

Depth measurement includes handles. BB24 height measurement includes mounting height.

AVAILABLE TOPS



1.5-INCH STAINLESS STEEL TOP
indicated with green model #
example: BB58HC-1-B



2-INCH STAINLESS STEEL TOP
indicated with black model # and "-27"
example: BB48HC-1-B-27



GALVANIZED SUB-TOP
indicated with black model #
example: BB48HC-1-B

GLASS DOORS (HINGED)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DOORS/ SHELVES | # OF STRAIGHT WALL KEGS | 12oz CANS | 12oz BOTTLES | LONGNECK BOTTLES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | COLOR |
|----------|-----------------|-------------------|-------------------------------|--------------|-----------------|---------------------|-------|-------|--------|-------|-----|------|---------------|-----------------|
| 1 | BB24HC-1-G-B | 1/2 | 1 | 180 | 140 | 110 | 24 | 30.13 | 37.75 | 115 | 1/6 | 2 | 7.66 | BLACK |
| | BB24HC-1-G-S | | | | | | | | | | | | | STAINLESS FRONT |
| 1 | BB36HC-1-G-B | 1/2 | 1 | 240 | 220 | 170 | 36 | 24.5 | 34 | 115 | 1/4 | 2.5 | 8.36 | BLACK |
| | BB36HC-1-G-S | | | | | | | | | | | | | STAINLESS |
| 1 | BB36HC-1-G-B-27 | 1/2 | 1 | 240 | 220 | 170 | 36 | 24.5 | 36 | 115 | 1/4 | 2.5 | 8.36 | BLACK |
| | BB36HC-1-G-S-27 | | | | | | | | | | | | | STAINLESS |
| 2 | BB48HC-1-G-B | 2/4 | 2 | 288 | 300 | 325 | 48 | 24.5 | 34 | 115 | 1/4 | 2.5 | 12.4 | BLACK |
| | BB48HC-1-G-S | | | | | | | | | | | | | STAINLESS |
| 2 | BB48HC-1-G-B-27 | 2/4 | 2 | 288 | 300 | 325 | 48 | 24.5 | 36 | 115 | 1/4 | 2.5 | 12.4 | BLACK |
| | BB48HC-1-G-S-27 | | | | | | | | | | | | | STAINLESS |
| 2 | BB58HC-1-G-B | 2/4 | 2 | 528 | 440 | 365 | 59 | 29.13 | 37.25 | 115 | 1/4 | 2.5 | 21.86 | BLACK |
| | BB58HC-1-G-S | | | | | | | | | | | | | STAINLESS FRONT |
| 2 | BB68HC-1-G-B | 2/4 | 3 | 672 | 550 | 435 | 69 | 29.13 | 37.25 | 115 | 1/3 | 5.3 | 25.93 | BLACK |
| | BB68HC-1-G-S | | | | | | | | | | | | | STAINLESS FRONT |
| 3 | BB72HC-1-G-B | 3/6 | 3 | 540 | 480 | 505 | 72 | 24.5 | 34 | 115 | 1/3 | 3.1 | 19.92 | BLACK |
| | BB72HC-1-G-S | | | | | | | | | | | | | STAINLESS |
| 3 | BB72HC-1-G-B-27 | 3/6 | 3 | 540 | 480 | 505 | 72 | 24.5 | 36 | 115 | 1/3 | 3.1 | 19.92 | BLACK |
| | BB72HC-1-G-S-27 | | | | | | | | | | | | | STAINLESS |
| 3 | BB78HC-1-G-B | 3/6 | 4 | 740 | 630 | 560 | 79 | 29.13 | 37.25 | 115 | 1/3 | 5.5 | 33.59 | BLACK |
| | BB78HC-1-G-S | | | | | | | | | | | | | STAINLESS FRONT |
| 3 | BB94HC-1-G-B | 3/6 | 5 | 920 | 785 | 675 | 95 | 29.13 | 37.25 | 115 | 1/3 | 5.5 | 37.82 | BLACK |
| | BB94HC-1-G-S | | | | | | | | | | | | | STAINLESS FRONT |

Depth measurement includes handles. BB24 height measurement includes mounting height.

GLASS DOORS (SLIDING) (Door frame only comes in black)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DOORS/ SHELVES | # OF STRAIGHT WALL KEGS | 12oz CANS | 12oz BOTTLES | LONGNECK BOTTLES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | COLOR |
|----------|------------------|-------------------|-------------------------------|--------------|-----------------|---------------------|-------|-------|--------|-------|-----|------|---------------|-----------------|
| 2 | BB48HC-1-GS-B | 2/4 | 2 | 288 | 300 | 325 | 48 | 23.63 | 34 | 115 | 1/4 | 2.5 | 12.4 | BLACK |
| | BB48HC-1-GS-S | | | | | | | | | | | | | STAINLESS |
| 2 | BB48HC-1-GS-B-27 | 2/4 | 2 | 288 | 300 | 325 | 48 | 23.63 | 36 | 115 | 1/4 | 2.5 | 12.4 | BLACK |
| | BB48HC-1-GS-S-27 | | | | | | | | | | | | | STAINLESS |
| 2 | BB58HC-1-GS-B | 2/4 | 2 | 528 | 440 | 365 | 59 | 28.25 | 37.25 | 115 | 1/4 | 2.5 | 21.86 | BLACK |
| | BB58HC-1-GS-S | | | | | | | | | | | | | STAINLESS FRONT |
| 3 | BB72HC-1-GS-B | 3/6 | 3 | 540 | 480 | 505 | 72 | 23.63 | 34 | 115 | 1/3 | 3.1 | 19.92 | BLACK |
| | BB72HC-1-GS-S | | | | | | | | | | | | | STAINLESS |
| 3 | BB72HC-1-GS-B-27 | 3/6 | 3 | 540 | 480 | 505 | 72 | 23.63 | 36 | 115 | 1/3 | 3.1 | 19.92 | BLACK |
| | BB72HC-1-GS-S-27 | | | | | | | | | | | | | STAINLESS |

Depth measurement includes handles.

BACK BAR COOLERS

Standard Pass-thru

SOLID DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DOORS/ SHELVES | # OF STRAIGHT WALL KEGS | 12oz CANS | 12oz BOTTLES | LONGNECK BOTTLES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | COLOR |
|----------|------------------|-------------------|-------------------------------|--------------|-----------------|---------------------|-------|-------|--------|-------|-----|------|---------------|-----------|
| 2 | BB48HC-1-PT-B | 4/4 | 2 | 288 | 300 | 325 | 48 | 27.38 | 34 | 115 | 1/3 | 3.1 | 13.6 | BLACK |
| | BB48HC-1-PT-S | | | | | | | | | | | | | STAINLESS |
| 2 | BB48HC-1-PT-B-27 | 4/4 | 2 | 288 | 300 | 325 | 48 | 27.38 | 36 | 115 | 1/3 | 3.1 | 13.6 | BLACK |
| | BB48HC-1-PT-S-27 | | | | | | | | | | | | | STAINLESS |
| 3 | BB72HC-1-PT-B | 6/6 | 3 | 540 | 480 | 505 | 72 | 27.38 | 34 | 115 | 1/3 | 3.1 | 22.1 | BLACK |
| | BB72HC-1-PT-S | | | | | | | | | | | | | STAINLESS |
| 3 | BB72HC-1-PT-B-27 | 6/6 | 3 | 540 | 480 | 505 | 72 | 27.38 | 36 | 115 | 1/3 | 3.1 | 22.1 | BLACK |
| | BB72HC-1-PT-S-27 | | | | | | | | | | | | | STAINLESS |

Depth measurement includes handles.



GLASS DOORS (HINGED)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DOORS/ SHELVES | # OF STRAIGHT WALL KEGS | 12oz CANS | 12oz BOTTLES | LONGNECK BOTTLES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | COLOR |
|----------|--------------------|-------------------|-------------------------------|--------------|-----------------|---------------------|-------|-------|--------|-------|-----|------|---------------|-----------|
| 2 | BB48HC-1-G-PT-B | 4/4 | 2 | 288 | 300 | 325 | 48 | 27.38 | 34 | 115 | 1/3 | 3.1 | 13.6 | BLACK |
| | BB48HC-1-G-PT-S | | | | | | | | | | | | | STAINLESS |
| 2 | BB48HC-1-G-PT-B-27 | 4/4 | 2 | 288 | 300 | 325 | 48 | 27.38 | 36 | 115 | 1/3 | 3.1 | 13.6 | BLACK |
| | BB48HC-1-G-PT-S-27 | | | | | | | | | | | | | STAINLESS |
| 3 | BB72HC-1-G-PT-B | 6/6 | 3 | 540 | 480 | 505 | 72 | 27.38 | 34 | 115 | 1/3 | 3.1 | 22.1 | BLACK |
| | BB72HC-1-G-PT-S | | | | | | | | | | | | | STAINLESS |
| 3 | BB72HC-1-G-PT-B-27 | 6/6 | 3 | 540 | 480 | 505 | 72 | 27.38 | 36 | 115 | 1/3 | 3.1 | 22.1 | BLACK |
| | BB72HC-1-G-PT-S-27 | | | | | | | | | | | | | STAINLESS |

Depth measurement includes handles.

GLASS DOORS (SLIDING) (Door frame only comes in black)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DOORS/ SHELVES | # OF STRAIGHT WALL KEGS | 12oz CANS | 12oz BOTTLES | LONGNECK BOTTLES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | COLOR |
|----------|---------------------|-------------------|-------------------------------|--------------|-----------------|---------------------|-------|-------|--------|-------|-----|------|---------------|-----------|
| 2 | BB48HC-1-GS-PT-B | 4/4 | 2 | 288 | 300 | 325 | 48 | 25.75 | 34 | 115 | 1/3 | 3.1 | 13.6 | BLACK |
| | BB48HC-1-GS-PT-S | | | | | | | | | | | | | STAINLESS |
| 2 | BB48HC-1-GS-PT-B-27 | 4/4 | 2 | 288 | 300 | 325 | 48 | 25.75 | 36 | 115 | 1/3 | 3.1 | 13.6 | BLACK |
| | BB48HC-1-GS-PT-S-27 | | | | | | | | | | | | | STAINLESS |
| 3 | BB72HC-1-GS-PT-B | 6/6 | 3 | 540 | 480 | 505 | 72 | 25.75 | 34 | 115 | 1/3 | 3.1 | 22.1 | BLACK |
| | BB72HC-1-GS-PT-S | | | | | | | | | | | | | STAINLESS |
| 3 | BB72HC-1-GS-PT-B-27 | 6/6 | 3 | 540 | 480 | 505 | 72 | 25.75 | 36 | 115 | 1/3 | 3.1 | 22.1 | BLACK |
| | BB72HC-1-GS-PT-S-27 | | | | | | | | | | | | | STAINLESS |

Depth measurement includes handles.

AVAILABLE TOPS



2-INCH STAINLESS STEEL TOP
indicated with black model # and "-27"
example: BB48HC-1-G-PT-B-27



GALVANIZED SUB-TOP
indicated with black model #
example: BB48HC-1-G-PT-B

BACK BAR COOLERS

Food Rated

SOLID DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DOORS/ SHELVES | # OF STRAIGHT WALL KEGS | 12oz CANS | 12oz BOTTLES | LONGNECK BOTTLES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | COLOR |
|----------|-----------------|-------------------|-------------------------------|--------------|-----------------|---------------------|-------|-------|--------|-------|-----|------|---------------|--------------------|
| 1 | BB24HC-1-F-B | 1/2 | 1 | 180 | 140 | 110 | 24 | 30.13 | 37.75 | 115 | 1/6 | 2 | 7.66 | BLACK |
| | BB24HC-1-F-S | | | | | | | | | | | | | STAINLESS FRONT |
| 1 | BB36HC-1-F-B | 1/2 | 1 | 240 | 220 | 170 | 36 | 24.5 | 34 | 115 | 1/4 | 2.5 | 8.31 | BLACK |
| | BB36HC-1-F-S | | | | | | | | | | | | | STAINLESS |
| 1 | BB36HC-1-F-B-27 | 1/2 | 1 | 240 | 220 | 170 | 36 | 24.5 | 36 | 115 | 1/4 | 2.5 | 8.31 | BLACK |
| | BB36HC-1-F-S-27 | | | | | | | | | | | | | STAINLESS |
| 2 | BB48HC-1-F-B | 2/4 | 2 | 288 | 300 | 325 | 48 | 24.5 | 34 | 115 | 1/4 | 2.5 | 12.4 | BLACK |
| | BB48HC-1-F-S | | | | | | | | | | | | | STAINLESS |
| 2 | BB48HC-1-F-B-27 | 2/4 | 2 | 288 | 300 | 325 | 48 | 24.5 | 36 | 115 | 1/4 | 2.5 | 12.4 | BLACK |
| | BB48HC-1-F-S-27 | | | | | | | | | | | | | STAINLESS |
| 2 | BB58HC-1-F-B | 2/4 | 2 | 528 | 440 | 365 | 59 | 29.13 | 37.25 | 115 | 1/4 | 2.5 | 21.86 | BLACK |
| | BB58HC-1-F-S | | | | | | | | | | | | | STAINLESS FRONT |
| 2 | BB68HC-1-F-B | 2/4 | 3 | 672 | 550 | 435 | 69 | 29.13 | 37.25 | 115 | 1/3 | 5.3 | 25.93 | BLACK |
| | BB68HC-1-F-S | | | | | | | | | | | | | STAINLESS FRONT |
| 3 | BB72HC-1-F-B | 3/6 | 3 | 540 | 480 | 505 | 72 | 24.5 | 34 | 115 | 1/3 | 3.1 | 19.92 | BLACK |
| | BB72HC-1-F-S | | | | | | | | | | | | | STAINLESS |
| 3 | BB72HC-1-F-B-27 | 3/6 | 3 | 540 | 480 | 505 | 72 | 24.5 | 36 | 115 | 1/3 | 3.1 | 19.92 | BLACK |
| | BB72HC-1-F-S-27 | | | | | | | | | | | | | STAINLESS |
| 3 | BB78HC-1-F-B | 3/6 | 4 | 740 | 630 | 560 | 79 | 29.13 | 37.25 | 115 | 1/3 | 5.5 | 33.59 | BLACK |
| | BB78HC-1-F-S | | | | | | | | | | | | | STAINLESS FRONT |
| 3 | BB94HC-1-F-B | 3/6 | 5 | 920 | 785 | 675 | 95 | 29.13 | 37.25 | 115 | 1/3 | 5.5 | 37.82 | BLACK |
| | BB94HC-1-F-S | | | | | | | | | | | | | STAINLESS FRONT |

Depth measurement includes handles. BB24 height measurement includes mounting height.

AVAILABLE TOPS



1.5-INCH STAINLESS STEEL TOP
indicated with green model #
example: BB58HC-1-F-B



2-INCH STAINLESS STEEL TOP
indicated with black model # and "-27"
example: BB48HC-1-F-B-27



GALVANIZED SUB-TOP
indicated with black model #
example: BB48HC-1-F-B

GLASS DOORS (HINGED)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DOORS/ SHELVES | # OF STRAIGHT WALL KEGS | 12oz CANS | 12oz BOTTLES | LONGNECK BOTTLES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | COLOR |
|----------|------------------|-------------------|-------------------------------|--------------|-----------------|---------------------|-------|-------|--------|-------|-----|------|---------------|-----------------|
| 1 | BB24HC-1-FG-B | 1/2 | 1 | 180 | 140 | 110 | 24 | 30.13 | 37.75 | 115 | 1/6 | 2 | 7.66 | BLACK |
| | BB24HC-1-FG-S | | | | | | | | | | | | | STAINLESS FRONT |
| 1 | BB36HC-1-FG-B | 1/2 | 1 | 240 | 220 | 170 | 36 | 24.5 | 34 | 115 | 1/4 | 2.5 | 8.36 | BLACK |
| | BB36HC-1-FG-S | | | | | | | | | | | | | STAINLESS |
| 1 | BB36HC-1-FG-B-27 | 1/2 | 1 | 240 | 220 | 170 | 36 | 24.5 | 36 | 115 | 1/4 | 2.5 | 8.36 | BLACK |
| | BB36HC-1-FG-S-27 | | | | | | | | | | | | | STAINLESS |
| 2 | BB48HC-1-FG-B | 2/4 | 2 | 288 | 300 | 325 | 48 | 24.5 | 34 | 115 | 1/4 | 2.5 | 12.4 | BLACK |
| | BB48HC-1-FG-S | | | | | | | | | | | | | STAINLESS |
| 2 | BB48HC-1-FG-B-27 | 2/4 | 2 | 288 | 300 | 325 | 48 | 24.5 | 36 | 115 | 1/4 | 2.5 | 12.4 | BLACK |
| | BB48HC-1-FG-S-27 | | | | | | | | | | | | | STAINLESS |
| 2 | BB58HC-1-FG-B | 2/4 | 2 | 528 | 440 | 365 | 59 | 29.13 | 37.25 | 115 | 1/4 | 2.5 | 21.86 | BLACK |
| | BB58HC-1-FG-S | | | | | | | | | | | | | STAINLESS FRONT |
| 2 | BB68HC-1-FG-B | 2/4 | 3 | 672 | 550 | 435 | 69 | 29.13 | 37.25 | 115 | 1/3 | 5.3 | 25.93 | BLACK |
| | BB68HC-1-FG-S | | | | | | | | | | | | | STAINLESS FRONT |
| 3 | BB72HC-1-FG-B | 3/6 | 3 | 540 | 480 | 505 | 72 | 24.5 | 34 | 115 | 1/3 | 3.1 | 19.92 | BLACK |
| | BB72HC-1-FG-S | | | | | | | | | | | | | STAINLESS |
| 3 | BB72HC-1-FG-B-27 | 3/6 | 3 | 540 | 480 | 505 | 72 | 24.5 | 36 | 115 | 1/3 | 3.1 | 19.92 | BLACK |
| | BB72HC-1-FG-S-27 | | | | | | | | | | | | | STAINLESS |
| 3 | BB78HC-1-FG-B | 3/6 | 4 | 740 | 630 | 560 | 79 | 29.13 | 37.25 | 115 | 1/3 | 5.5 | 33.59 | BLACK |
| | BB78HC-1-FG-S | | | | | | | | | | | | | STAINLESS FRONT |
| 3 | BB94HC-1-FG-B | 3/6 | 5 | 920 | 785 | 675 | 95 | 29.13 | 37.25 | 115 | 1/3 | 5.5 | 37.82 | BLACK |
| | BB94HC-1-FG-S | | | | | | | | | | | | | STAINLESS FRONT |

Depth measurement includes handles. BB24 height measurement includes mounting height.

GLASS DOORS (SLIDING) (Door frame only comes in black)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DOORS/ SHELVES | # OF STRAIGHT WALL KEGS | 12oz CANS | 12oz BOTTLES | LONGNECK BOTTLES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | COLOR |
|----------|--------------------|-------------------|-------------------------------|--------------|-----------------|---------------------|-------|-------|--------|-------|-----|------|---------------|-----------------|
| 2 | BB48HC-1-F-GS-B | 2/4 | 2 | 288 | 300 | 325 | 48 | 23.63 | 34 | 115 | 1/4 | 2.5 | 12.4 | BLACK |
| | BB48HC-1-F-GS-S | | | | | | | | | | | | | STAINLESS |
| 2 | BB48HC-1-F-GS-B-27 | 2/4 | 2 | 288 | 300 | 325 | 48 | 23.63 | 36 | 115 | 1/4 | 2.5 | 12.4 | BLACK |
| | BB48HC-1-F-GS-S-27 | | | | | | | | | | | | | STAINLESS |
| 2 | BB58HC-1-F-GS-B | 2/4 | 2 | 528 | 440 | 365 | 59 | 28.25 | 37.25 | 115 | 1/4 | 2.5 | 21.86 | BLACK |
| | BB58HC-1-F-GS-S | | | | | | | | | | | | | STAINLESS FRONT |
| 3 | BB72HC-1-F-GS-B | 3/6 | 3 | 540 | 480 | 505 | 72 | 23.63 | 34 | 115 | 1/3 | 3.1 | 19.92 | BLACK |
| | BB72HC-1-F-GS-S | | | | | | | | | | | | | STAINLESS |
| 3 | BB72HC-1-F-GS-B-27 | 3/6 | 3 | 540 | 480 | 505 | 72 | 23.63 | 36 | 115 | 1/3 | 3.1 | 19.92 | BLACK |
| | BB72HC-1-F-GS-S-27 | | | | | | | | | | | | | STAINLESS |

Depth measurement includes handles.

BACK BAR COOLERS

Food Rated Pass-thru

SOLID DOORS

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DOORS/ SHELVES | # OF STRAIGHT WALL KEGS | 12oz CANS | 12oz BOTTLES | LONGNECK BOTTLES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | COLOR |
|----------|--------------------|-------------------|-------------------------------|--------------|-----------------|---------------------|-------|-------|--------|-------|-----|------|---------------|-----------|
| 2 | BB48HC-1-F-PT-B | 4/4 | 2 | 288 | 300 | 325 | 48 | 27.38 | 34 | 115 | 1/3 | 3.1 | 13.6 | BLACK |
| | BB48HC-1-F-PT-S | | | | | | | | | | | | | STAINLESS |
| 2 | BB48HC-1-F-PT-B-27 | 4/4 | 2 | 288 | 300 | 325 | 48 | 27.38 | 36 | 115 | 1/3 | 3.1 | 13.6 | BLACK |
| | BB48HC-1-F-PT-S-27 | | | | | | | | | | | | | STAINLESS |
| 3 | BB72HC-1-F-PT-B | 6/6 | 3 | 540 | 480 | 505 | 72 | 27.38 | 34 | 115 | 1/3 | 3.1 | 22.1 | BLACK |
| | BB72HC-1-F-PT-S | | | | | | | | | | | | | STAINLESS |
| 3 | BB72HC-1-F-PT-B-27 | 6/6 | 3 | 540 | 480 | 505 | 72 | 27.38 | 36 | 115 | 1/3 | 3.1 | 22.1 | BLACK |
| | BB72HC-1-F-PT-S-27 | | | | | | | | | | | | | STAINLESS |

Depth measurement includes handles.



GLASS DOORS (HINGED)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DOORS/ SHELVES | # OF STRAIGHT WALL KEGS | 12oz CANS | 12oz BOTTLES | LONGNECK BOTTLES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | COLOR |
|----------|---------------------|-------------------|-------------------------------|--------------|-----------------|---------------------|-------|-------|--------|-------|-----|------|---------------|-----------|
| 2 | BB48HC-1-FG-PT-B | 4/4 | 2 | 288 | 300 | 325 | 48 | 27.38 | 34 | 115 | 1/3 | 3.1 | 13.6 | BLACK |
| | BB48HC-1-FG-PT-S | | | | | | | | | | | | | STAINLESS |
| 2 | BB48HC-1-FG-PT-B-27 | 4/4 | 2 | 288 | 300 | 325 | 48 | 27.38 | 36 | 115 | 1/3 | 3.1 | 13.6 | BLACK |
| | BB48HC-1-FG-PT-S-27 | | | | | | | | | | | | | STAINLESS |
| 3 | BB72HC-1-FG-PT-B | 6/6 | 3 | 540 | 480 | 505 | 72 | 27.38 | 34 | 115 | 1/3 | 3.1 | 22.1 | BLACK |
| | BB72HC-1-FG-PT-S | | | | | | | | | | | | | STAINLESS |
| 3 | BB72HC-1-FG-PT-B-27 | 6/6 | 3 | 540 | 480 | 505 | 72 | 27.38 | 36 | 115 | 1/3 | 3.1 | 22.1 | BLACK |
| | BB72HC-1-FG-PT-S-27 | | | | | | | | | | | | | STAINLESS |

Depth measurement includes handles.

GLASS DOORS (SLIDING) (Door frame only comes in black)

MAINTAINS PRODUCT TEMPERATURES OF 36-38°F.

| SECTIONS | MODEL # | DOORS/ SHELVES | # OF STRAIGHT WALL KEGS | 12oz CANS | 12oz BOTTLES | LONGNECK BOTTLES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | COLOR |
|----------|-----------------------|-------------------|-------------------------------|--------------|-----------------|---------------------|-------|-------|--------|-------|-----|------|---------------|-----------|
| 2 | BB48HC-1-GS-F-PT-B | 4/4 | 2 | 288 | 300 | 325 | 48 | 25.75 | 34 | 115 | 1/3 | 3.1 | 13.6 | BLACK |
| | BB48HC-1-GS-F-PT-S | | | | | | | | | | | | | STAINLESS |
| 2 | BB48HC-1-GS-F-PT-B-27 | 4/4 | 2 | 288 | 300 | 325 | 48 | 25.75 | 36 | 115 | 1/3 | 3.1 | 13.6 | BLACK |
| | BB48HC-1-GS-F-PT-S-27 | | | | | | | | | | | | | STAINLESS |
| 3 | BB72HC-1-GS-F-PT-B | 6/6 | 3 | 540 | 480 | 505 | 72 | 25.75 | 34 | 115 | 1/3 | 3.1 | 22.1 | BLACK |
| | BB72HC-1-GS-F-PT-S | | | | | | | | | | | | | STAINLESS |
| 3 | BB72HC-1-GS-F-PT-B-27 | 6/6 | 3 | 540 | 480 | 505 | 72 | 25.75 | 36 | 115 | 1/3 | 3.1 | 22.1 | BLACK |
| | BB72HC-1-GS-F-PT-S-27 | | | | | | | | | | | | | STAINLESS |

Depth measurement includes handles.

AVAILABLE TOPS



2-INCH STAINLESS STEEL TOP
indicated with black model # and "-27"
example: BB48HC-1-FG-PT-B-27



GALVANIZED SUB-TOP
indicated with black model #
example: BB48HC-1-FG-PT-B

BOTTLE COOLERS



Heavy-duty sliding lids

**7 year warranty on parts,
labor, and compressor**

Made in USA

Galvanized steel interior and floor

Full electronic temperature control

100% Metal lids
reinforced to prevent bowing

Stainless steel top

Bottle opener and cap catcher standard

Adjustable wire dividers



ADJUSTABLE DIVIDERS

to organize cooler to meet your specific needs



100% METAL LIDS

reinforced to prevent bowing

FROSTY BREW™ 30-32°

MAINTAINS PRODUCT TEMPERATURES OF 30-32°F.

| MODEL # | LIDS/ DIVIDERS | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | COLOR |
|-------------|-------------------|-------|-------|--------|-------|-----|------|---------------|--------------------|
| DW49HC-B-29 | 2/3 | 50 | 26.5 | 33.75 | 115 | 1/4 | 2.5 | 13.7 | BLACK |
| DW49HC-S-29 | | | | | | | | | STAINLESS FRONT |
| DW64HC-B-29 | 2/4 | 65 | 26.5 | 33.75 | 115 | 1/4 | 2.5 | 18.5 | BLACK |
| DW64HC-S-29 | | | | | | | | | STAINLESS FRONT |
| DW79HC-B-29 | 3/5 | 80 | 26.5 | 33.75 | 115 | 1/4 | 2.5 | 24.1 | BLACK |
| DW79HC-S-29 | | | | | | | | | STAINLESS FRONT |
| DW94HC-B-29 | 4/6 | 95 | 26.5 | 33.75 | 115 | 1/4 | 2.5 | 28.63 | BLACK |
| DW94HC-S-29 | | | | | | | | | STAINLESS FRONT |

Depth measurement includes handles. Height measurement includes mounting height.

STANDARD 36-40°

MAINTAINS PRODUCT TEMPERATURES OF 36-40°F.

| MODEL # | LIDS/ DIVIDERS | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | COLOR |
|----------|-------------------|-------|-------|--------|-------|------|------|---------------|--------------------|
| SF34HC-B | 1/2 | 34.88 | 26.5 | 33.63 | 115 | 1/10 | 1.2 | 7.5 | BLACK |
| SF34HC-S | | | | | | | | | STAINLESS FRONT |
| DW49HC-B | 2/3 | 50 | 26.5 | 33.75 | 115 | 1/4 | 2.5 | 13.7 | BLACK |
| DW49HC-S | | | | | | | | | STAINLESS FRONT |
| DW64HC-B | 2/4 | 65 | 26.5 | 33.75 | 115 | 1/4 | 2.5 | 18.5 | BLACK |
| DW64HC-S | | | | | | | | | STAINLESS FRONT |
| DW79HC-B | 3/5 | 80 | 26.5 | 33.75 | 115 | 1/4 | 2.5 | 24.1 | BLACK |
| DW79HC-S | | | | | | | | | STAINLESS FRONT |
| DW94HC-B | 4/6 | 95 | 26.5 | 33.75 | 115 | 1/4 | 2.5 | 28.63 | BLACK |
| DW94HC-S | | | | | | | | | STAINLESS FRONT |

Depth measurement includes handles. Height measurement includes mounting height.

ACCESS OPTIONS

- Metal lids

EXTERIOR FINISHES

- Black
- Stainless Steel

INTERIOR FINISHES

- Galvanized steel
- Stainless steel

AVAILABLE OPTIONS

- Remote models available

AVAILABLE ACCESSORIES

- Frosty brew model (30-32° F)
- Extra wide dividers
- Locks

MOUNTING OPTIONS

- 3" casters
- 6" legs

AGENCY CERTIFICATIONS



GLASS & PLATE CHILLERS



Heavy-duty sliding lids
7 year warranty on parts, labor, and compressor
Made in USA

Front or top loading

Interior thermometer

Self-closing door with 120° stay-open feature
(Front Loading Models)

Field-reversible door
(Front Loading Models)

Easy door removal
for service and cleaning (Top Loading)

Magnetic gasket attached to each door
for positive seal

Auto-defrost

Built-in Condensate Evaporator System

Operating Temperature -10F

Two Epoxy Coated Shelves

R290 Refrigerant



ADJUSTABLE DIVIDERS
to organize cooler to meet your specific needs



100% METAL LIDS
reinforced to prevent bowing (GF models)

FRONT LOADING

CHILLS TO 0°F, PRODUCING FROST WHEN REMOVED

| MODEL # | DOORS/ SHELVES | CASE CAPACITY | | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | COLOR |
|-------------|-------------------|---------------|-----------|-------|-------|--------|-------|-----|------|---------------|-----------|
| | | 12oz MUGS | 8" PLATES | | | | | | | | |
| FLG24HC-1-B | 1/2 | 80 | 100 | 24 | 30.13 | 32 | 115 | 1/4 | 2.5 | 5.06 | BLACK |
| FLG24HC-1-S | | | | | | | | | | | STAINLESS |

Front breathing

needs no installation clearances on the side, back or bottom

Depth measurement includes handles.



TOP LOADING

CHILLS TO 0°F, PRODUCING FROST WHEN REMOVED

| MODEL # | LIDS/ DIVIDERS | CASE CAPACITY | | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | COLOR |
|----------|-------------------|---------------|-----------|-------|-------|--------|-------|-----|------|---------------|-----------|
| | | 12oz MUGS | 8" PLATES | | | | | | | | |
| GF24HC-B | 1/2 | 76 | 100 | 24 | 26.13 | 33.63 | 115 | 1/2 | 3.5 | 4 | BLACK |
| GF24HC-S | | | | | | | | | | | STAINLESS |
| GF34HC-B | 1/2 | 94 | 150 | 34 | 26.13 | 33.63 | 115 | 1/2 | 3.5 | 6.4 | BLACK |
| GF34HC-S | | | | | | | | | | | STAINLESS |
| GF48HC-B | 2/4 | 164 | 250 | 48 | 26.13 | 33.63 | 115 | 1/2 | 3.5 | 9.65 | BLACK |
| GF48HC-S | | | | | | | | | | | STAINLESS |

Depth measurement includes handles.

ACCESS OPTIONS

- Doors
- Metal lids

EXTERIOR FINISHES

- Black
- Stainless Steel

INTERIOR FINISHES

- Galvanized steel with reinforced stainless steel floor
- Stainless steel

AVAILABLE OPTIONS

- Remote models available

AVAILABLE ACCESSORIES

- Locks factory installed available for GF24L & GF34L

MOUNTING OPTIONS

- 6" legs (GF models only)

AGENCY CERTIFICATIONS



Bar & Wine Accessories

| DESCRIPTION | UNIT(S) | PART NUMBER |
|------------------------------|---------------------------------|--------------------------------|
| SHELVING / ORGANIZERS | | |
| Epoxy Coated Wire Shelf | DD48 | 403-322D |
| Epoxy Coated Wire Shelf | DD50/50C Shelf Kit (set of 2) | 00C21-022A |
| Epoxy Coated Wire Shelf | DD58 Shelf Kit (set of 2) | 00C21-007A-- |
| Epoxy Coated Wire Shelf | DD68 Shelf Kit (set of 2) | 00C21-006A-- |
| Epoxy Coated Wire Shelf | DD72 | 403-326D |
| Epoxy Coated Wire Shelf | DD78 Shelf Kit (set of 3) | 00C21-023A |
| Epoxy Coated Wire Shelf | DD94 Left/Right Shelf | 403-216D |
| Epoxy Coated Wire Shelf | DD94 Center Shelf | 403-249D |
| Epoxy Coated Wire Shelf | BB24 | 403-943D-02 |
| Epoxy Coated Wire Shelf | BB36 | 403-924D-02 |
| Epoxy Coated Wire Shelf | BB48/48G | 403-322D |
| Epoxy Coated Wire Shelf | BB58/58G | 403-582D |
| Epoxy Coated Wire Shelf | BB68/68G | 403-216D (RH) 403-249D (LH) |
| Epoxy Coated Wire Shelf | BB72/72G | 403-326D |
| Epoxy Coated Wire Shelf | BB78/78G CTR | 403-582D |
| Epoxy Coated Wire Shelf | BB78/78G RH | 403-584D |
| Epoxy Coated Wire Shelf | BB94/94G CTR | 403-216D |
| Epoxy Coated Wire Shelf | BB94/94G RH | 403-249D |
| Epoxy Coated Wire Shelf | DP46/67/93/119, DPD46/67/93/119 | 403-834D |
| Shelf Clip | DD48/72/94 | 403-168A |
| Shelf Clip | All BB's | 403-168A |

| DESCRIPTION | UNIT(S) | PART NUMBER |
|--------------------------------|---------------------------------------|--------------|
| MOUNTING | | |
| 6" Caster | BB24/BB36 | 00C31-038A |
| 6" Caster | BB48, BB72 (set of four) | 00C31-038A |
| 3" Caster | BB48, BB72 (set of four) | 00C31-041A |
| 3" Caster | BB58, BB68 (set of four) | 00C26-012A |
| 3" Caster | BB78, BB94 (set of six) | 00C26-017A |
| 3" Caster | DD36 | 00C31-041A |
| 6" Caster | DD36 | 00C31-038A |
| 6" Caster | DD48, DD72 (set of four) | 00C31-038A |
| 3" Caster | DD48, DD72 (set of four) | 00C31-041A |
| 3" Caster | DD50, DD58, DD68 (set of four) | 00C26-012A |
| 3" Caster | DD78, DD94 (set of six) | 00C26-017A |
| 3" Caster | DW49 (set of four) | 00C31-034ABB |
| 3" Caster | DW64 (set of four) | 00C31-031ABB |
| 3" Caster | DW79, DW94 (set of six) | 00C31-030ABB |
| 6" Adjustable with Plate | DW49 (set of four) | 00C31-036A-- |
| 6" Adjustable with Plate | DW64 (set of four) | 00C31-033ABB |
| 6" Adjustable with Plate | DW79, 94 (set of six) | 00C31-032ABB |
| 6" Adjustable with Plate | SF34 (set of four) | 00C31-035AAA |
| Leg Accessory Kit | BM23 (set of four) | 00C06-002A-- |
| 6" Adjustable with Plate | GF24, 34, 48 (set of four) | 00C31-035AAA |
| 6" Black Leg | BB/DD 24, 36, 48, 72 (set of four) | 58B02-001A |
| 6" Adjustable with Plate | BB58, 68, DD50, 58, 68 (set of four) | 00C26S014A |
| 6" Adjustable with Plate | BB/DD 78, 94 (set of six) | 00C26S015A |
| LID LOCKS | | |
| Lid Lock | GF24/34 | 00C30-100A |
| Lid Lock | GF48 | 00C30-101A |
| Lid Lock | SF34 | 00C30-031ABB |
| Lid Lock | DW49 Solid Lid | 00C30-030AAA |
| Lid Lock | DW64 Solid Lid | 00C30-029AAA |
| Lid Lock | DW79 Solid Lid | 00C30-028AAA |
| Lid Lock (2 required for DW94) | DW94 Solid Lid | 00C30-030AAA |

Bar & Wine Accessories

| DESCRIPTION | UNIT(S) | PART NUMBER |
|------------------------------------|---------------|-------------|
| TAPS / FAUCETS / MANIFOLDS | | |
| Hole cover for cut out on DD units | ALL DD UNITS | 00C10-006A |
| 1 Tap 3" OD Beer Faucet | ALL DD UNITS | 406-053A |
| 1 Tap 2 1/2" OD Beer/Wine Faucet | ALL DD UNITS | 406-004A-- |
| 2 Tap 3" OD Beer/Wine Faucet | ALL DD UNITS | 406-054A |
| 3 Tap 3" OD Beer/Wine Faucet | ALL DD UNITS | 406-055A |
| 4 Tap 3" OD Beer/Wine Faucet | ALL DD UNITS | 406-064A |
| 5 Tap 3" OD Beer/Wine Faucet | ALL DD UNITS | 406-075A |
| Single Faucet Adapter | ALL DD UNITS | 406-056A |
| Double Faucet Adapter | ALL DD UNITS | 406-057A |
| 2 Way Manifold | ALL DD UNITS | 402-188A-- |
| 3 Way Manifold | ALL DD UNITS | 402-189A-- |
| 4 Way Manifold | ALL DD UNITS | 402-191A |
| ADDITIONAL ACCESSORIES | | |
| Wire Divider (Step) | DW UNITS | 403-114D |
| Wire Divider (Adjustable) | DW UNITS | 403-113D |
| Wire Divider Spring | DW UNITS | 401-090AAB |
| Cap Catcher (black) | DW & SF UNITS | 09B30S025C |
| Draft Arm Faucet Lock (slide on) | ALL DD UNITS | 401-909A |
| Glass Rinser | ALL DD UNITS | 406-067A |





Super Bright RGB LED Liquor Shelves

- 50,000 hours minimum life
- Environmentally friendly: no mercury, lead or toxic gases
- Color-rich, programmable LED's
- Available up to 8' Long
- 44 Key RGB Wireless Remote Control to control unlimited colors with multiple lighting effects
- Independent level control: choose colors for each step independent of the others
- Plugs into any standard wall outlet
- Modular Construction
- Includes UL listed power supply
- 100% Black Acrylic bottle tiers. Glossy black on front and sides with frosted acrylic tops.

| DESCRIPTION | PART NUMBER |
|---|-------------------|
| 2' LED Liquor Shelf, 24"L X 4.5"W X .75" Thick, 2 wall brackets | LS2-24L |
| 3' LED Liquor Shelf, 36"L X 4.5"W X .75" Thick, 2 wall brackets | LS3-36L |
| 4' LED Liquor Shelf, 48"L X 4.5"W X .75" Thick, 3 wall brackets | LS4-48L |
| 5' LED Liquor Shelf, 60"L X 4.5"W X .75" Thick, 4 wall brackets | LS5-60L |
| 6' LED Liquor Shelf, 72"L X 4.5"W X .75" Thick, 5 wall brackets | LS6-72L |
| 2' Double Wide LED Liquor Shelf, 24"L X 9"W X .75" Thick, 2 wall brackets | LS2-24L-DW |
| 3' Double Wide LED Liquor Shelf, 36"L X 9"W X .75" Thick, 2 wall brackets | LS3-36L-DW |
| 4' Double Wide LED Liquor Shelf, 48"L X 9"W X .75" Thick, 3 wall brackets | LS4-48L-DW |
| 5' Double Wide LED Liquor Shelf, 60"L X 9"W X .75" Thick, 4 wall brackets | LS5-60L-DW |
| 6' Double Wide LED Liquor Shelf, 72"L X 9"W X .75" Thick, 5 wall brackets | LS6-72L-DW |
| 2' Two Tier LED Bottle Display, 24"L X 9"D X 8"H | LBD2-24L |
| 3' Two Tier LED Bottle Display, 36"L X 9"W X 8"H | LBD2-36L |
| 4' Two Tier LED Bottle Display, 48"L X 9"W X 8"H | LBD2-48L |
| 5' Two Tier LED Bottle Display, 60"L X 9"W X 8"H | LBD2-60L |
| 6' Two Tier LED Bottle Display, 72"L X 9"W X 8"H | LBD2-72L |
| 2' Three Tier LED Bottle Display, 24"L X 13.5"D X 12"H | LBD3-24L |
| 3' Three Tier LED Bottle Display, 36"L X 13.5"D X 12"H | LBD3-36L |
| 4' Three Tier LED Bottle Display, 48"L X 13.5"D X 12"H | LBD3-48L |
| 5' Three Tier LED Bottle Display, 60"L X 13.5"D X 12"H | LBD3-60L |
| 6' Three Tier LED Bottle Display, 72"L X 13.5"D X 12"H | LBD3-72L |
| 2' Four Tier LED Bottle Display, 24"L X 18"W X 16"H | LBD4-24L |
| 3' Four Tier LED Bottle Display, 36"L X 18"W X 16"H | LBD4-36L |
| 4' Four Tier LED Bottle Display, 48"L X 18"W X 16"H | LBD4-48L |
| 5' Four Tier LED Bottle Display, 60"L X 18"W X 16"H | LBD4-60L |
| 6' Four Tier LED Bottle Display, 72"L X 18"W X 16"H | LBD4-72L |





MILK COOLERS

MADE TO DELIVER CONSISTENT PERFORMANCE DURING REPEATED ACCESS

Cold Wall



Forced Air



MILK COOLERS



One-piece bottom for maximum support

7 year warranty on parts, labor, and compressor

Made in USA

CFC & HCFC-free insulation is foamed-in-place
for increased structural strength & energy efficiency

Epoxy coated, steel wire racks included
for added floor protection


Flexible compression door gaskets
ensure a tight seal for added temperature control

Cylinder Locks

Bottom drain for connection to drain hose and easy cleaning

External digital thermometer

Coolers hold milk between 36°-38°F
until ready to serve for maximum refreshment

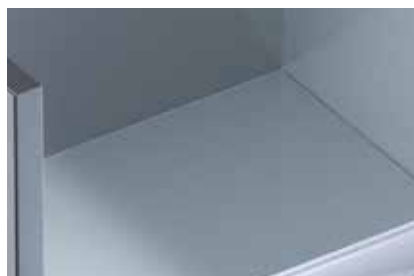

ONE-PIECE REINFORCED FLOOR
for maximum milk crate support and made with stainless steel



SINGLE AND DUAL ACCESS
models available

COLD WALL - SINGLE ACCESS

MAINTAINS PRODUCT TEMPERATURES OF 32-40°F.

| MODEL # | CASE CAPACITY | | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | EXTERIOR FINISH | INTERIOR FINISH |
|-------------|---------------|---------------|-------|-------|--------|-------|-----|------|------------|-----------------|-----------------|
| | 13 X 13 X 11" | 19 X 13 X 11" | | | | | | | | | |
| SM34HC-S | 8 | 4 | 34 | 30.63 | 41.13 | 115 | 1/3 | 2.2 | 12.73 | STAINLESS | STAINLESS |
| SM34HC-W | | | | | | | | | | WHITE | GALVANIZED |
| SM34HC-W-02 | | | | | | | | | | WHITE | STAINLESS |
| SM49HC-S | 12 | 8 | 49 | 30.63 | 41.13 | 115 | 1/3 | 2.2 | 20.32 | STAINLESS | STAINLESS |
| SM49HC-W | | | | | | | | | | WHITE | GALVANIZED |
| SM49HC-W-02 | | | | | | | | | | WHITE | STAINLESS |
| SM58HC-S | 16 | 10 | 58 | 30.63 | 41.13 | 115 | 1/3 | 2.2 | 22.63 | STAINLESS | STAINLESS |
| SM58HC-W | | | | | | | | | | WHITE | GALVANIZED |
| SM58HC-W-02 | | | | | | | | | | WHITE | STAINLESS |

Depth measurement includes handles. Height measurement includes mounting height.

FORCED AIR - SINGLE ACCESS

MAINTAINS PRODUCT TEMPERATURES OF 32-40°F.

| MODEL # | CASE CAPACITY | | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | EXTERIOR FINISH | INTERIOR FINISH |
|----------------|---------------|---------------|-------|-------|--------|-------|-----|------|------------|-----------------|-----------------|
| | 13 X 13 X 11" | 19 X 13 X 11" | | | | | | | | | |
| SMF34HC-1-S | 8 | 4 | 34 | 33.63 | 46.88 | 115 | 1/4 | 1.87 | 13.59 | STAINLESS | STAINLESS |
| SMF34HC-1-W | | | | | | | | | | WHITE | GALVANIZED |
| SMF34HC-1-W-02 | | | | | | | | | | WHITE | STAINLESS |
| SMF49HC-1-S | 12 | 8 | 49 | 33.63 | 46.88 | 115 | 1/4 | 2.46 | 19.66 | STAINLESS | STAINLESS |
| SMF49HC-1-W | | | | | | | | | | WHITE | GALVANIZED |
| SMF49HC-1-W-02 | | | | | | | | | | WHITE | STAINLESS |
| SMF58HC-1-S | 16 | 10 | 58 | 33.63 | 46.88 | 115 | 1/4 | 2.46 | 24 | STAINLESS | STAINLESS |
| SMF58HC-1-W | | | | | | | | | | WHITE | GALVANIZED |
| SMF58HC-1-W-02 | | | | | | | | | | WHITE | STAINLESS |

Depth measurement includes handles. Height measurement includes mounting height.

ACCESS OPTIONS

- Metal lids

EXTERIOR FINISHES

- White coated steel
- Stainless steel

INTERIOR FINISHES

- Galvanized steel
- Stainless steel

AVAILABLE ACCESSORIES

- Cow Spot graphics
- Custom graphics available
- Corner & Wrap-around bumpers

MOUNTING OPTIONS

- 4" casters (SM models only)
- 6" casters (SMF models only)

AGENCY CERTIFICATIONS

MILK COOLERS

COLD WALL - DUAL ACCESS

MAINTAINS PRODUCT TEMPERATURES OF 32-40°F.

| MODEL # | CASE CAPACITY | | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | EXTERIOR FINISH | INTERIOR FINISH |
|-------------|---------------|---------------|-------|-------|--------|-------|-----|------|------------|-----------------|-----------------|
| | 13 X 13 X 11" | 19 X 13 X 11" | | | | | | | | | |
| ST34HC-S | 8 | 4 | 34 | 31.25 | 41.13 | 115 | 1/2 | 3.7 | 12.37 | STAINLESS | STAINLESS |
| ST34HC-W | | | | | | | | | | WHITE | GALVANIZED |
| ST34HC-W-02 | | | | | | | | | | WHITE | STAINLESS |
| ST49HC-S | 12 | 8 | 49 | 31.25 | 41.13 | 115 | 1/2 | 3.7 | 18.97 | STAINLESS | STAINLESS |
| ST49HC-W | | | | | | | | | | WHITE | GALVANIZED |
| ST49HC-W-02 | | | | | | | | | | WHITE | STAINLESS |
| ST58HC-S | 16 | 10 | 58 | 31.25 | 41.13 | 115 | 1/2 | 3.7 | 22.5 | STAINLESS | STAINLESS |
| ST58HC-W | | | | | | | | | | WHITE | GALVANIZED |
| ST58HC-W-02 | | | | | | | | | | WHITE | STAINLESS |

Depth measurement includes handles. Height measurement includes mounting height.

FORCED AIR - DUAL ACCESS

MAINTAINS PRODUCT TEMPERATURES OF 32-40°F.

| MODEL # | CASE CAPACITY | | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | EXTERIOR FINISH | INTERIOR FINISH |
|----------------|---------------|---------------|-------|-------|--------|-------|-----|------|------------|-----------------|-----------------|
| | 13 X 13 X 11" | 19 X 13 X 11" | | | | | | | | | |
| STF49HC-1-S | 12 | 8 | 49 | 34 | 47.75 | 115 | 1/4 | 2.46 | 20.55 | STAINLESS | STAINLESS |
| STF49HC-1-W | | | | | | | | | | WHITE | GALVANIZED |
| STF49HC-1-W-02 | | | | | | | | | | WHITE | STAINLESS |
| STF58HC-1-S | 16 | 10 | 58 | 34 | 47.75 | 115 | 1/4 | 2.46 | 24.3 | STAINLESS | STAINLESS |
| STF58HC-1-W | | | | | | | | | | WHITE | GALVANIZED |
| STF58HC-1-W-02 | | | | | | | | | | WHITE | STAINLESS |

Depth measurement includes handles. Height measurement includes mounting height.

| DESCRIPTION | UNIT(S) | PART NUMBER |
|------------------------------------|---|-------------|
| MOUNTING | | |
| 4" Plate Caster (standard) | SM/ST 34,49,58 (per caster-2 required per cabinet) | 401-094A-- |
| 4" Plate Caster w/brake (standard) | SM/ST 34,49,58 (per caster-2 required per cabinet) | 401-099A-- |
| 7" Plate Caster (standard) | SMF34,SMF49,SMF58 (per caster-2 required per cabinet) | 401-519A |
| 7" Plate Caster w/brake (standard) | SMF34,SMF49,SMF58 (per caster-2 required per cabinet) | 401-520A |
| 5" Plate Caster w/brake (standard) | STF49/STF58 (per caster-2 required per cabinet) | 401-127A-- |
| 5" Plate Caster (standard) | STF49/STF58 (per caster-2 required per cabinet) | 401-209A |
| 6" Adjustable with Plate | SM34,49,58 ST34,49,58 (set of four) | 00C06-003A |

| | | |
|--|------------------------------|---------------|
| BUMPERS <i>(Require field tapping and installation)</i> | | |
| Wrap Around Bumpers | SM34 / ST34 | 00C01-004A-- |
| Wrap Around Bumpers | SM49 / ST49 | 00C01-005A-- |
| Wrap Around Bumpers | SM58 / ST58 | 00C01-006A-- |
| Wrap Around Bumpers | SMF34 / STF34 | 00C01-009A-- |
| Wrap Around Bumpers | SMF49 / STF49 | 00C01-010A |
| Wrap Around Bumpers | SMF58 / STF58 | 00C01-011A |
| Corner Bumpers (single) | All Milk Coolers | 703-868A |
| Corner Bumpers (Set of 4) | Corner Bumper Kit (set of 4) | 00C01-012A-01 |

| | | |
|------------------------------|-------------------------------------|--------------|
| DECALS | | |
| Base Kit (Cow Spots) | SM34, ST34, SMF34 | 807-836C |
| 1 Base Kit (Cow Spots) | SM49, ST49, SMF49 | 807-836C |
| Supplemental Kit (Cow Spots) | SM49, ST49, SMF49 | 807-837C |
| 1 Base Kit (Cow Spots) | SM58, ST58, SMF58 | 807-836C |
| Supplemental Kit (Cow Spots) | SM58, ST58, SMF58 (2 kits required) | 807-837C |
| Got Milk Lid Decal | SMF/SM/ST34 | 807-839C-001 |
| Got Milk Lid Decal | SMF/SM/ST49 | 807-839C-002 |
| Got Milk Lid Decal | SMF/SM/ST58 | 807-839C-003 |
| Got Milk Lid Decal | STF49 | 807-839C-004 |
| Got Milk Lid Decal | STF58 | 807-839C-005 |
| Got Milk Door Decal | SMF/SM/ST34 | 807-839C-006 |
| Got Milk Door Decal | SMF/SM/ST49 | 807-839C-007 |
| Got Milk Door Decal | SMF/SM/ST58 | 807-839C-008 |



BLAST CHILLERS / SHOCK FREEZERS

RAPID CHILLING FOR OPTIMAL FOOD SAFETY AND KITCHEN EFFICIENCY



Self Contained

BLAST CHILLERS/SHOCK FREEZERS

Self Contained



NOW WITH R290 REFRIGERANT

Stainless steel exterior and interior

Die-formed interior floor

Central drain for easy cleaning

Automatic recognition of core probe

HACCP alarm display button

Timed manual defrost button

Automatic product storing at end of cycle

Up to 99 custom programmable cycles

**5" Touchscreen LCD Display (RBS models)
Electronic control board display (CF model)**

High precision heated multi sensor probe

3 Year Warranty parts and labor

5 Year Warranty on compressor



CORE PROBE

measures product temperature



INTUITIVE PROGRAMMABLE DISPLAY

5" touchscreen on RBS models
Electronic control on CF model

WHAT IS BLAST CHILLING AND FREEZING?

Blast Chilling extracts the heat out of food, rapidly lowering the temperature. Department of Health guidelines require that all food temperatures be reduced from 150°F to 38°F degrees within a 90 minute period to keep food out of the "danger zone" of 145°F to 46°F, where bacteria multiplies fast.

Blast freezing rapidly lowers food temperatures from 150°F to 0°F vs. chilling temperatures above.

WHAT IS SOFT CHILL?

The Soft Chill cycle is ideal for the rapid, but gentle chilling of any dish (i.e., rice, pasta, fish, and fruit). This cycle brings the temperature of the food down while maintaining positive air temperatures of 37°F or above. This prevents ice crystals from forming that can damage the structure of delicate foods and allows for delicate foods to keep their brilliant colors.

WHAT IS HARD CHILL?

The Hard Chill cycle is ideal for chilling "standard products" such as cooked meat, lasagna, and individually portioned meals.

BENEFITS OF BLAST CHILLING

- Always serve fresh, top quality products
- Color, texture, and nutritional value are locked in
- The fast cooling process of blast chilling dramatically reduces bacteria reproduction, minimizing food spoilage
- Delicate foods like rice, pasta, fish, and fruit are protected
- Kitchen Efficiency – Saves Time & Money
- Allows advance food prep by preparing larger batches that can be refrigerated or frozen for later use
- Can enhance profits by increasing product capacity and reducing food waste
- Allows left over food from serving line to be quickly and safely chilled for later use
- Use Blast Chiller/Freezers on raw or cooked food

BLAST CHILLER/SHOCK FREEZERS

| MODEL # | PAN CAPACITY | CHILLING CYCLE | CHILLING CAPACITY | WIDTH | DEPTH | HEIGHT | VOLTS | AMPS | CUBIC FEET |
|---------|--------------|----------------------------|-------------------|-------|-------|--------|---------|------|------------|
| CF031AG | 3 - 12x20" | 194° to 37° F (90 minutes) | 17.6 lbs | 22.05 | 27.6 | 20.47 | 115-120 | 9.9 | 7.3 |
| | | 194° to 0° F (240 minutes) | 11 lbs | | | | | | |

Depth measurement includes handles. Height measurement includes mounting height.

BLAST CHILLER/SHOCK FREEZERS

R290 Refrigerant **Self-closing doors** with still position at 100 degrees **Ergonomic handles** **6" legs standard**

| MODEL # | PAN CAPACITY | CHILLING CYCLE | CHILLING CAPACITY | WIDTH | DEPTH | HEIGHT | VOLTS | AMPS |
|----------------|-------------------------------|----------------------------|-------------------|-------|-------|--------|-------------------|------|
| RBS-054-SA-HC | 5 - 12x20" or 5 - 18x26" | 194° to 37° F (90 minutes) | 45 lbs | 33.46 | 34.65 | 35.43 | 208-240 6-15P | 6.6 |
| | | 194° to 0° F (240 minutes) | 30 lbs | | | | | |
| RBS-122L-SA-HC | 12 - 12x20" or 12 - 18x26" | 194° to 37° F (90 minutes) | 100 lbs | 31.10 | 34.25 | 71.26 | 208-240 15-20P | 9 |
| | | 194° to 0° F (240 minutes) | 70 lbs | | | | | |
| RBS-162-SA-HC | 16 - 12x20" or 16 - 18x26" | 194° to 37° F (90 minutes) | 140 lbs | 33.46 | 39.37 | 77.17 | 208-240 15-20P | 13.2 |
| | | 194° to 0° F (240 minutes) | 100 lbs | | | | | |

Depth measurement includes handles. Height measurement includes mounting height.

FINISHES

- Stainless steel interior and exterior

AGENCY CERTIFICATIONS



| ACCESSORIES | UNIT(S) | PART NUMBER |
|-----------------|--------------------------------|-------------|
| MOUNTING | | |
| 3.2" Casters | RBS-054-SA-HC | FR920596 |
| 5" Casters | RBS-122L-SA-HC / RBS-162-SA-HC | FR920839 |

BLAST CHILLER/FREEZER/THAWER

Self-Contained



Shown with optional ramp

5" High Definition, Easy-To-Use Touch Display
Blast Chilling, Shock Freezing, Thawing Mode
Self-Contained R404A Refrigeration System

Stainless Steel Exterior And Interior

Rounded interior corners for proper cleaning

High Density, Polyurethane Insulation

Hinged Door With Gasket

with Closing Ramp System and Ergonomic Vertical Door Handle

Anti-Condensation Resistance

Placed On The Door Under The Gasket

Stainless Steel Door Liner

Thick Stainless Steel Internal Bumper

to Avoid Damage Caused By The Cart

Die-Formed Leak-Proof Floor

Heated Core Probe

with 4 Measuring Points

Customized Blast Chilling, Blast Freezing and Thawing Cycles

320 cycles can be memorized

USB Connection

for Uploading And Downloading Data And Recipes



EXPANDABILITY AND CONTROL

easily add, edit or rename recipes, all organized by product type and function



TOUCH CONTROL PHOTO MENU

is easy to use, and the function selection is immediate and intuitive

BLAST CHILLER/FREEZERS

| MODEL # | DOORS/ SHELVES | WIDTH | DEPTH | HEIGHT | VOLTS | HP | AMPS | CUBIC FEET | CHILLING CYCLE | CHILLING CAPACITY |
|----------------|-------------------|-------|-------|--------|-------|-----|------|---------------|-------------------------------|----------------------|
| BF200RB-PF0-XL | 1/0 | 43.31 | 64.25 | 94.5 | 208 | 2.8 | 25.6 | 49.95 | 160° to 38° F (90 minutes) | 187 lbs |

Depth measurement includes handles. Height measurement includes mounting height.



EXTERIOR FINISHES

- Stainless steel

INTERIOR FINISHES

- Stainless steel

AVAILABLE ACCESSORIES

- Additional Single Sensor Probe
- Stainless steel ramp

INTERIOR SPACE CAPACITY

- Maximum Interior Dimensions for Carts:
35"W x 40"D x 71"H (not included)

AGENCY CERTIFICATIONS



| ACCESSORIES | UNIT(S) | PART NUMBER |
|--|----------------|-------------|
| RAMPS | | |
| Stainless steel ramp 43.2" wide by 31.9" deep | BF200RB-PF0-XL | FR960077 |

WARRANTY

SALES TERMS

PRICES & SPECIFICATIONS

Beverage-Air reserves the right to change the price and specifications of the equipment and/or material without notice. Prices are F.O.B. plant of manufacture.

CANCELLATION

Buyer may cancel its order, reduce quantities, revise specifications, or extend schedules only by mutual agreement as to reasonable and proper cancellation charges which shall take into account expenses already incurred and commitment made by seller, and buyer shall indemnify seller against any loss.

FREIGHT CLASS

All Beverage-Air products ship under 150 freight classification.

CUSTOMER'S FREIGHT DAMAGE PROCEDURE

Before signing the carrier's freight bill the customer should do the following:

Visible Damage:

1. Inspect shipment for any damage. If you see damage or feel there may be concealed damage, mark the carrier's copy of the freight bill "damaged".
2. If there is damage to your shipment, action must be taken by you to notify Beverage-Air immediately. A freight claim must be filed with the carrier and an inspection scheduled by the carrier. It is the duty of the carrier to give you a written report upon notification. (VISIBLE AND CONCEALED).
3. For visible damage, where possible, do not accept delivery unless the condition noted on your copy of the freight bill and signed by the driver.

Concealed Damage:

If the damage is concealed, notify the carrier within 5 days of the receipt of the product by phone and in writing as well as Beverage Air. Ask them to send their agent to complete an inspection report. Retain all cartons and merchandise for inspection. It is critical that the customer take the above actions; without these steps claims for concealed damages may be denied.

3RD PARTY FREIGHT

3rd Party Freight shipments are FOB Beverage-Air and are not eligible for refusal at time of delivery. ALL 3rd PARTY SHIPMENTS ARE THE RESPONSIBILITY OF THE SHIPPER.

Claims for damaged product are to be filed by the shipper and Beverage-Air will not be liable. This product is not eligible for return to our warehouse facility.

RETURN OF PRODUCT

EQUIPMENT - Prior Authorization must be granted by Beverage-Air before equipment can be returned for credit. Returns will only be authorized within 90 days of invoice date. Return authorizations are valid for 30 days. Equipment approved for return is subject to a 25% restocking charge.

Returned equipment must be shipped freight prepaid, packed in original carton, and received in good condition.

PARTS - Prior Authorization must be granted by Beverage-Air before parts can be returned for credit. Returns will only be authorized within 30 days of invoice date. Return authorizations are valid for 30 days. Parts approved for return are subject to a 25% or \$25.00 restocking charge (whichever is greater). Returned parts must be shipped freight prepaid, in the original packaging, and received in good condition.

WARRANTY (Warranty valid in USA and Canada)

SEVEN (7) YEAR PARTS AND LABOR WARRANTY:

Beverage-Air Corporation warrants to the original purchaser of Beverage-Air branded equipment, including all parts thereof, that such equipment is free from defects in material and workmanship, under normal use, with proper maintenance, and service as indicated by Beverage-Air installation and operation instructions, for a period of seven (7) years from the date of installation, or eighty-eight (88) Months from the date of shipment from the manufacturer, whichever is earlier (units shipped from July, 1 2024 are eligible for 7-year warranty).

SEVEN (7) YEAR COMPRESSOR PART WARRANTY*:

In addition to the warranty set forth above, Beverage-Air warrants the hermetically/semi-hermetically sealed compressor (part only) for Seven Years; not to exceed eighty-eight (88) months from the date of shipment from Beverage-Air, provided upon receipt of the compressor, manufacturer examination shows the sealed compressor to be defective. This extended warranty does not cover freight for the replacement compressor or freight for the return of the failed compressor.

* Units shipped after 07/01/2024. Previous warranty applies to units shipped prior.

EXCEPTIONS:

- CT96 and CF3 Models carry a one (1) year parts and labor warranty, limited to fifteen (15) months from date of shipment from Beverage-Air. These are excluded from additional compressor warranty.
- SR/SF (Slate) and TMR/TMF models carry a two (2) year parts and labor warranty, limited to twenty-seven (27) months from date of shipment from the Beverage-Air.
- BZ, VM, CDR, BDC, NC, DPCR, MT, and Blast Chillers carry a three (3) year parts and labor warranty; additional two (2) years compressor part only.
- Units installed in Residential applications will be not covered under this warranty. Units are intended for Commercial use only.

Note: 3rd party extended warranties are not covered by this warranty statement.

Normal wear parts, as deemed by Beverage Air, such as but not exclusive to, light bulbs/lamps and gaskets are not covered by this warranty. For the purpose of this warranty, the original purchaser shall be deemed to mean the individual or company for who the product was originally installed.

Units that utilize variable speed compressor technology can experience nuisance tripping on Class A GFCI outlets which have a trip limit of 4 mA to 6 mA. To avoid this issue in a location that requires GFCI circuit protection, Beverage Air & Victory recommends using a HUBBELL Model Number GFRST83W 20A Heavy Duty Hospital Grade Self-Test GFCI Receptacle. Nuisance tripping not covered under warranty.

Our obligation under this warranty shall be limited to repairing or replacing, including labor, any part of such product, which proves thus defective. Beverage-Air reserves the right to examine any product claimed to be defective and request photos of the unit prior to dispatching service. Moisture or water damage is not covered under warranty. If service is deemed non-warranty, Beverage Air reserves the right to bill the end user for service.

The labor warranty shall be for self-contained units only and for standard straight time, which is defined as normal service rate time, for service performed during normal working hours. All warranty labor will be covered at standard time. Any service requested outside of a servicer's normal working hours including weekends and any additional overtime will be at the responsibility of the equipment purchaser. Any part or accessory determined to be defective in the product should be returned to the company within thirty (30) days under the terms of this warranty and must be accompanied by a record of the cabinet model, serial number, and identified with a return material authorization number (RMA#) issued by the manufacturer.

Special installation/applications, including remote locations, are limited in coverage by this warranty. Any installation that requires extra work, and/or travel, to gain access to the unit for service is the sole responsibility of the equipment purchaser.

Improper operation resulting from factors, including but not limited to, improper or negligent cleaning and maintenance, improper installation, low voltage conditions, inadequate wiring, outdoor use (unless otherwise specified) and accidental damage are not manufacturing defects and are strictly the responsibility of the purchaser.

With the exception of Blast Chillers product is designed for maintaining temperature and not bringing food to a desired temperature therefore cannot be held responsible for this function under warranty. Units must be in a conditioned environment or warranty will be void. Non-standard use of unit can also be subject to reduced or voided warranty.

Condensing coils must be cleaned at regular intervals as a part of preventative maintenance for optimal performance. Failure to do so is subject to a voided warranty. Although cleaning requirements vary in accordance with operation of various products, Beverage-Air recommends a minimum monthly cleaning.

NO CLAIMS CAN BE MADE AGAINST THIS WARRANTY FOR SPOILAGE OF FOOD, PRODUCTS, LOSS OF SALES OR CONSEQUENTIAL DAMAGES.

THE FOREGOING WARRANTIES ARE EXPRESSLY GIVEN IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HERBY DISCLAIMED, ALL OTHER OBLIGATIONS OR LIABILITIES ON OUR PART, AND WE NEITHER ASSUME, NOR AUTHORIZE ANY OTHER PERSON TO ASSUME FOR US, ANY OBLIGATION OR LIABILITY IN CONNECTION WITH THE SALE OF SAID REFRIGERATION UNITS OR ANY PARTS THERE OF.

This warranty shall not be assignable and shall be honored only in so far as the original purchaser. This warranty does not apply outside the limits of the United States of America and Canada, nor does it apply to any part that has been subject to misuse, neglect alteration, accident, or to any damage caused by transportation, flood, fire, acts of terrorism, or acts of God.

LIMITATION OF LIABILITY:

Beverage-Air Corporation or their affiliates shall not be liable for any indirect, incidental, special or consequential damages, or losses of a commercial nature arising out of malfunction equipment or its parts components thereof, as a result of defects in material or workmanship. THE ORIGINAL OWNER'S SOLE AND EXCLUSIVE REMEDY AND BEVERAGE-AIR'S SOLE AND EXCLUSIVE LIABILITY SHALL BE LIMITED TO THE REPAIR OR REPLACEMENT OF PARTS OR COMPONENTS CONTAINED IN THE EQUIPMENT IDENTIFIED ABOVE WHICH UNDER NORMAL USE AND SERVICE MALFUNCTION AS A RESULT OF DEFECTS IN MATERIAL OR WORKMANSHIP, SUBJECT TO THE APPLICABLE PROVISIONS AND LIMITATIONS STATED ABOVE.

Note: Additional Terms and Conditions of sale may apply. Notice: Specifications are subject to change without notice. Contact Beverage-Air for specific model agency approval. All prices are ex-works Brookville, PA. July 1, 2024.

CONTACTS

1 CR Peterson

ph: (800) 257-0400
fax: (508) 238-3647
email: jim@crpeterson.com
territory: Maine, New Hampshire, Vermont,
Connecticut, Rhode Island, Massachusetts

2 J Wilson Marketing

ph: (518) 692-8083
fax: (518) 692-8084
email: joe@jwilsonmarketing.com
territory: New York (except Metro/ NYC)

3 Curate

ph: (516) 694-0300
fax: (516) 694-1234
email: EastQuotes@CurateTeam.com
territory: New Jersey (Northern half of NJ),
New York (Metro)

4 Curate

ph: (516) 694-0300
fax: (516) 694-1234
email: EastQuotes@CurateTeam.com
territory: Delaware (entire state), Pennsylvania (east of
and including Bradford, Lycoming, Milton, Union,
Mifflin, Juniata, Perry, Cumberland, & Adam
Counties) New Jersey (south of and including
Mercer, Burlington, and Ocean counties)

5 Curren Solutions

ph: (410) 820-7100
email: sales@curren.solutions
territory: Maryland, District of Columbia, Virginia

6 Zink Foodservice

ph: (800) 492-7400
email: info@zinkfsg.com
territory: Indiana, Michigan

7 Zink Foodservice

ph: (800) 492-7400
email: info@zinkfsg.com
territory: Ohio, Kentucky, Western quarter of
Pennsylvania, West Virginia

11 Culinary Concepts

ph: (704) 521-8811
fax: (704) 521-8801
email: sgirard@cc-fsr.com
territory: North Carolina, South Carolina

12 Charles Pace & Associates, Inc.

ph: (770) 969-0488
fax: (770) 969-7277
email: pace@pacereps.com
territory: Georgia, Alabama, Tennessee
(Central and Eastern),
Florida (panhandle)

13 Unisource Marketing Group

ph: (954) 785-0034
fax: (954) 785-0854
email: quotes@unisourcemarketing.com
territory: Florida (except the panhandle)

14 Marketing Agents South

ph: (601) 956-4661
fax: (601) 956-4726
email: sales@masouth.com
territory: Mississippi, Western Tennessee,
Arkansas, Louisiana

15 E-Source Miller

ph: (214) 614-0215
fax: (214) 614-0213
email: leads@esourcemiller.com
territory: Oklahoma, Texas (except El Paso County)

16 Kain McArthur

ph: (913) 829-3700
email: info@kainmcarthur.com
territory: Missouri, Kansas, Iowa, Nebraska,
Illinois (Southern two thirds of state)

17 Zink Foodservice

ph: (800) 492-7400
email: info@zinkfsg.com
territory: Illinois (Central & Northern)

19 The YES Group

ph: (651) 452-9889
fax: (651) 452-3804
email: sales@theyesgroup.com
territory: Minnesota, North Dakota,
South Dakota, Wisconsin

20 The Redstone Group

ph: (800) 338-8131
email: quotes@theredstonegroup.net
territory: Arizona, Colorado, New Mexico,
Utah, Wyoming,
Texas (El Paso County only)

22 Curate

ph: (516) 694-0300
fax: (516) 694-1234
email: WestQuotes@CurateTeam.com
territory: Nevada (Clark County),
California (CA/Mexico border and
southern third of state)

24 Walter Zebrowski Associates

ph: (415) 883-3222
fax: (415) 883-9332
email: tom@walterzebrowskiassoc.com
territory: Nevada (entire state except Clark County),
California (Northern two thirds of state)

25 Kelly-Mincks

ph: (425) 481-9036
fax: (425) 806-5283
email: james@kelly-mincks.com
territory: Washington, Oregon, Alaska,
Montana, Idaho

Western Pacific Distributors

ph: (808) 501-0100
email: scott@teamwpd.com
territory: Hawaii

26 Garland

Services 26a - 26f
ph: (905) 624-1419
fax: (905) 624-5669
email: garland.canadaorders@garland-group.com
territory: Canada

International:

Foodservice Latino

ph: (561) 304-8956
email: info@foodservicelatino.com
territory: Central America, Mexico, South America

H.D. Sheldon & Co Inc

ph: (212) 924-6920
fax: (212) 627-1759
email: sales@hdsheldon.com
territory: Caribbean, Puerto Rico,
Virgin Islands

Factory Headquarters Sales Office

3779 Champion Blvd
Winston-Salem, NC 27105
Phone: (336) 245-6400
Fax: (336) 245-6453
Email: sales@bevair.com
Web: www.beverage-air.com

Food Service Manufacturing Facility

Parts RG's:
1082 Route 28
Brookville, PA 15825

Equipment RG's:
1082 Route 28
Brookville, PA 15825

Warranty Service

(877) 866-1223


Factory Technical Service

Phone: (800) 684-1199
Fax: (800) 262-9381

Factory Customer Service

Phone: (888) 845-9800
Fax: (800) 253-5168

For warranty services
please call Warranty Dispatch
at (877) 866-1223 or you can
email dispatch@alirefna.com
M-F 8am-5pm EST.

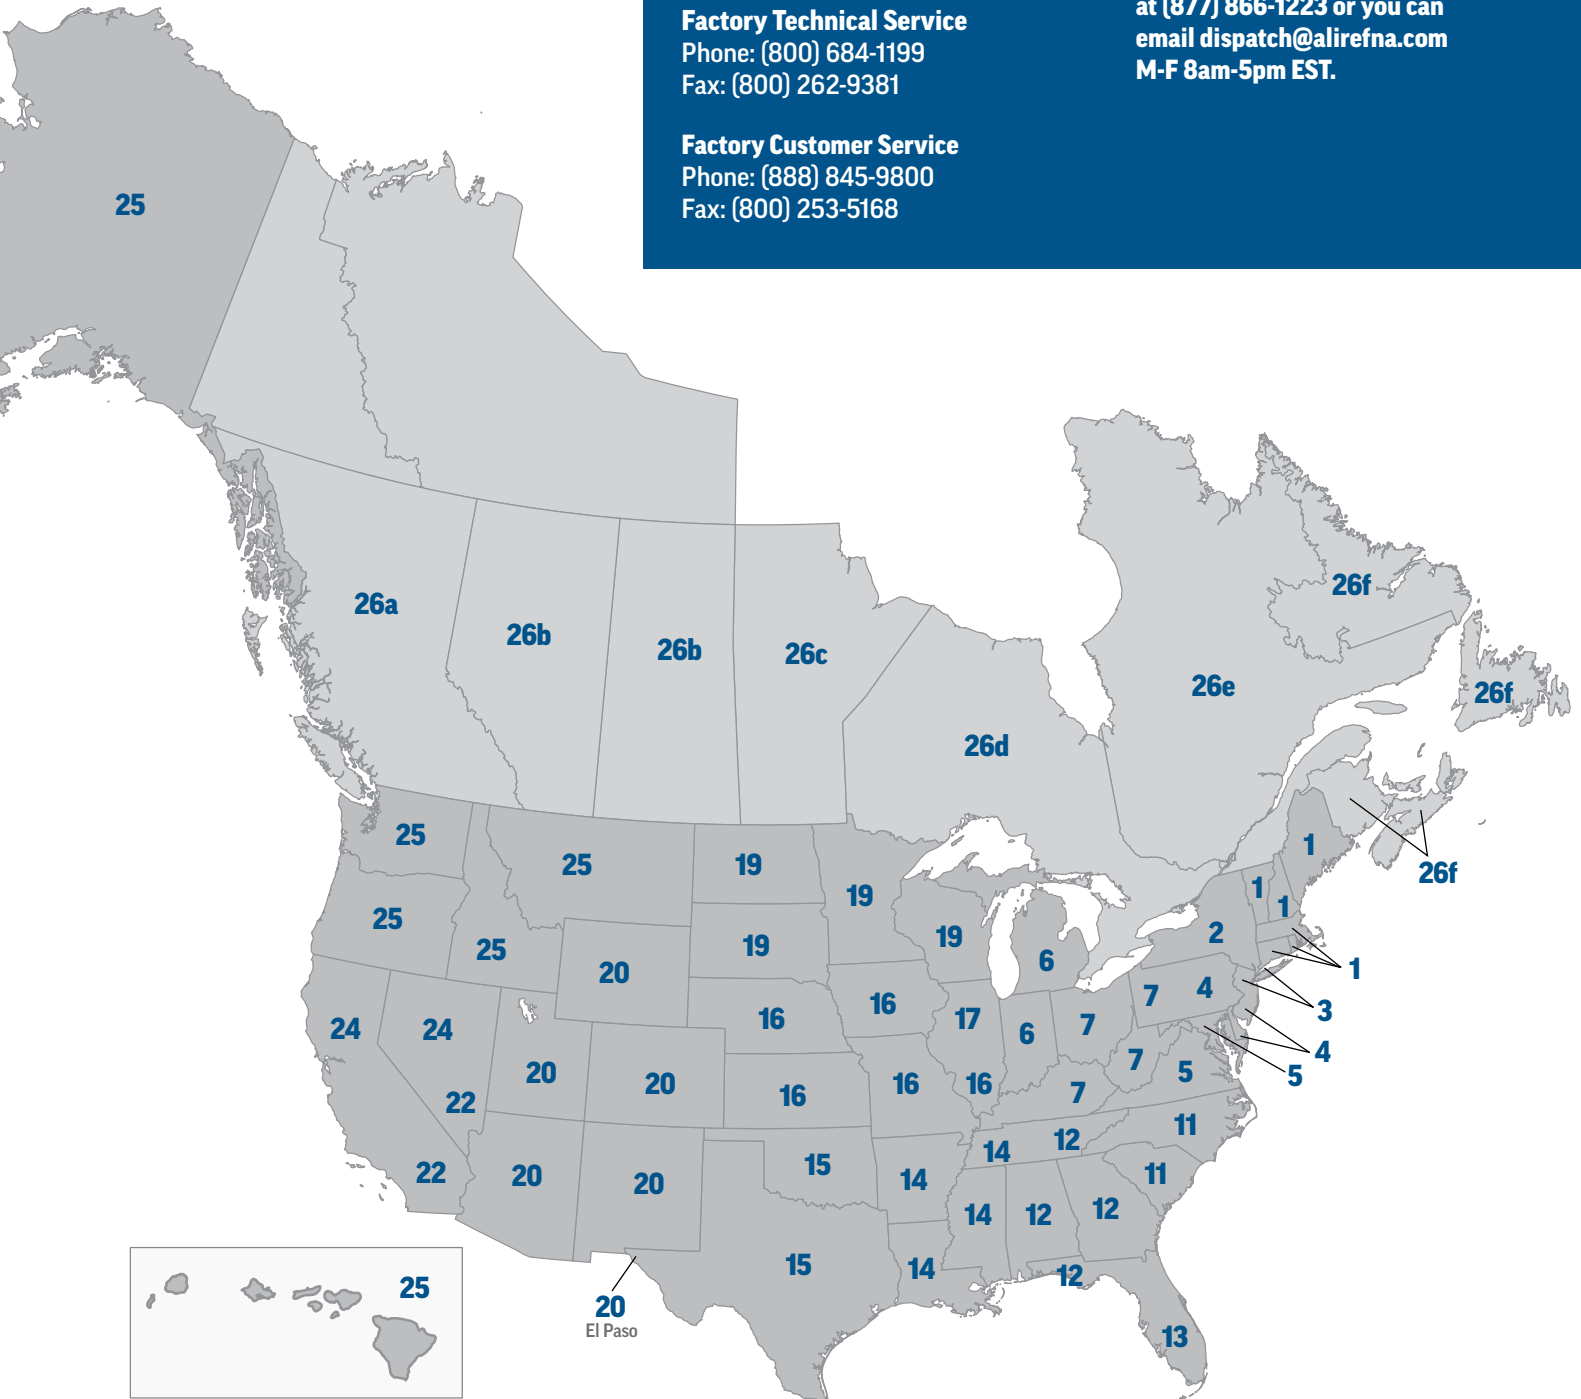

SOLUTION BASED INNOVATION

Whether it's market-wide initiatives or custom development, Beverage-Air is focused on designing solutions to the real-world challenges kitchens face today.

REACH OUT TODAY TO SEE HOW BEVERAGE-AIR CAN HELP WITH

- Maximizing workspace
- Improving workflow
- Increasing storage
- Enhancing cooling
- Ergonomics



BEVERAGE-AIR®
YOUR COMPLETE REFRIGERATION SOURCE

MASTER20250115

2025-BEVERAGE-AIR-CATALOG-888-45-9800 beverage-air.com

