



and commercial facilities with high ceilings up to 70 feet. Full operating temperature is reached within 2 minutes making it the ideal choice for supplying total building heat, spot heating, and work level heating.

The unique and patented ceramic tile design of the **ecoSchwank** increases radiant efficiency and reduces fuel cost up to 50% over conventional heating systems and is suitable for industrial and commercial applications.

**Experience Counts:** Schwank is the worldwide market leader and most trusted brand with over 2 million heating appliances sold.

**Features** 

- Aluminized steel burner housing to resist corrosion and withstand high temperature
  - Green technology: fuel costs and CO2 emissions reduced up to 50%
  - Direct spark ignition ensures ultimate safety and fuel economy


Optional Accessories See back for more details.

- ThermoControl Plus TruTemp Lion Chain
- Also Available in double burner model

Contact us today for a FREE design and quote!

# ecoSchwank - Economical High Intensity Heater

Information below is intended only as a reference and should not be used when installing equipment. Please ensure you locate the most recent instruction manual for accurate and up to date information.

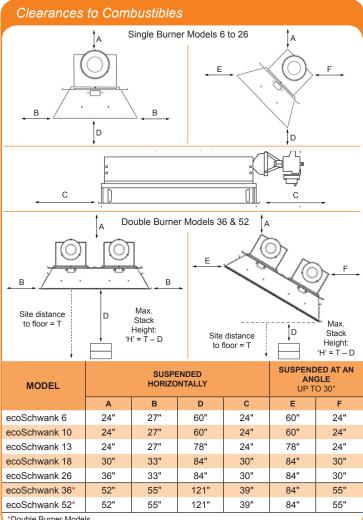

ecoSchwank 52*	52"	55"	121"	39"	84"	55"				
*Double Burner Models										
Optional Acc	cessorie	s								
Flexible Gas Connecto	JL-077	JL-0771-XX								
#2 Lion Chain, roll 200	JL-080	JL-0800-XX								
Safety Snap Hooks 2"	JL-080	JL-0800-SH								
Safety Snap Hooks 2"	JL-080	JL-0800-SH-B								
Consult your local authorized dealer for other Schwank accessories:  Line-voltage and 24V thermostat and controls Side reflector extensions										







Installation Manua



#### Distributor Information:

# Dimensions and Specifications Single Burner Models 6 to 26 В-6.5" C Supension Points (o.c.) 12.5" Double Burner Models 36 & 52 14.5" (suspension holes o.c.) 4.75" 8-1/2 8-3/4"

· · · · · · · · · · · · · · · · · · ·								
MODEL	DIMENSIONS			INPUT	WEIGHT	ELECT.		
	Α	В	С	BTU/HR	LBS.			
ecoSchwank 6	13.50"	24"	11.28"	21,500	22	24 VAC 60 Hz 0.55 A		
ecoSchwank 10	20.50"	30.25"	15.50"	35,000	26			
ecoSchwank 13	28.00"	38.50"	18.50"	50,000	31			
ecoSchwank 18	38.75"	48.50"	29.5"	65,000	38			
ecoSchwank 26	53.25"	63.75"	44"	100,000	45			
ecoSchwank 36*	39.75"	48.50"	36.50"	143,000	65			
ecoSchwank 52*	54.25"	63.00"	51.00"	200,000	75			
*Double Burner Models								

### Heater Controls & Thermostats



#### ThermoControl Plus

## Intelligent Infrared Heater Control

- Easy to use menu and graphical interface
- Minimal set up and configuration
- Handles up to 8 control zones for single and two-stage applications
- 8 programmable holiday periods per heating zone Data acquisition software offers reporting and analysis capabilities



#### **TruTemp**

#### Infrared Setback Thermostat

- Setback reduces control temperature by 9°F [13°C] when a building is unoccupied
- Setback is activated at night time by turning off lights
- Mounts on standard 4" [10cm] electrical box or directly to wall
- Tamper-proof option











20"













