



BREAD SLICERS

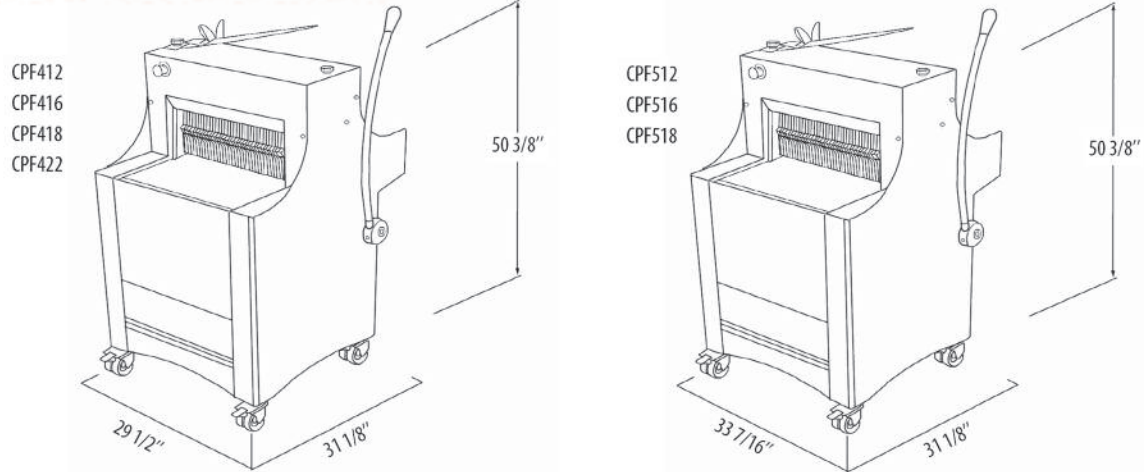

CPF SPECIFICATIONS

Model	Grated Weight lb (kg)	Dimensions			Slices thickness (inch)	Bread max length (inch)	Bread max width (inch)	Bread max height (inch)	Motor HP	Electrical system				
		W (inch)	D (inch)	H (inch)						Volts	Amps	Phases	Hz	NEMA
CPF412	580 lb (263)	29 1/2" (750)	31 1/8" (790)	50 3/8" (1280)	1/2" (12)	17 5/16" (440)	12 3/16" (310)	6 5/16" (160)	2/3	120	6	1	60	5-15P
CPF416	580 lb (263)	29 1/2" (750)	31 1/8" (790)	50 3/8" (1280)	5/8" (16)	17 5/16" (440)	12 3/16" (310)	6 5/16" (160)	2/3	120	6	1	60	5-15P
CPF418	580 lb (263)	29 1/2" (750)	31 1/8" (790)	50 3/8" (1280)	3/4" (18)	17 5/16" (440)	12 3/16" (310)	6 5/16" (160)	2/3	120	6	1	60	5-15P
CPF422	580 lb (263)	29 1/2" (750)	31 1/8" (790)	50 3/8" (1280)	7/8" (22)	17 5/16" (440)	12 3/16" (310)	6 5/16" (160)	2/3	120	6	1	60	5-15P
CPF512	660 lb (300)	33 7/16" (850)	31 1/8" (790)	50 3/8" (1280)	1/2" (12)	20 1/2" (520)	12 3/16" (310)	6 5/16" (160)	2/3	120	6	1	60	5-15P
CPF516	660 lb (300)	33 7/16" (850)	31 1/8" (790)	50 3/8" (1280)	5/8" (16)	20 1/2" (520)	12 3/16" (310)	6 5/16" (160)	2/3	120	6	1	60	5-15P
CPF518	660 lb (300)	33 7/16" (850)	31 1/8" (790)	50 3/8" (1280)	3/4" (18)	20 1/2" (520)	12 3/16" (310)	6 5/16" (160)	2/3	120	6	1	60	5-15P

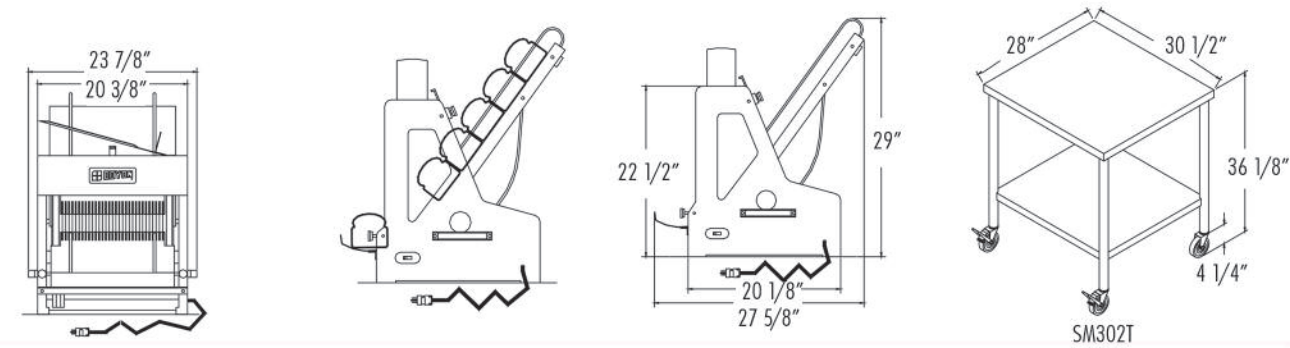

SM SERIES SPECIFICATIONS

Model	Grated Weight lb (kg)	Dimensions			Slices thickness (inch)	Bread max length (inch)	Bread max height (inch)	Motor HP	Electrical system				
		W (inch)	D (inch)	H (inch)					Volts	Amps	Phases	Hz	NEMA
SM302	200 lb (91)	23 7/8" (606)	27 5/8" (702)	29" (737)	5/8" (16)	15" (381)	5" (127)	1/4 HP	120	6	1	60	5-15P
SM302A	200lb (91)	23 7/8" (606)	27 5/8" (702)	29" (737)	3/4" (19)	15" (381)	5" (127)	1/4 HP	120	6	1	60	5-15P
SM302B	200lb (91)	23 7/8" (606)	27 5/8" (702)	29" (737)	1/2" (13)	15" (381)	5" (127)	1/4 HP	120	6	1	60	5-15P
SM302C	200lb (91)	23 7/8" (606)	27 5/8" (702)	29" (737)	1" (25)	15" (381)	5" (127)	1/4 HP	120	6	1	60	5-15P



\* Note: Not available in the province of Quebec.



USA Office  
5600 13th Street  
Menominee, MI 49858  
sales@nu-vu.com

1-800-338-9886 Toll Free  
1-906-863-4401 Phone  
1-906-863-5889 Fax  
www.nu-vu.com

Canada Office  
1255 Rue Principale  
Linière, QC. G0M 1J0  
sales@doyon.qc.ca

1-800-463-4273 Toll Free  
1-418-685-3431 Phone  
1-418-685-3948 Fax  
www.doyon.qc.ca



BREAD SLICERS



MODELS:  
SM  
CPF



# SM SERIES BREAD SLICER

## DESCRIPTION

The Doyon SM Series bread slicer is simply your best buy for slicing up to 240 loaves per hour and saving space. It comes with a standard packing shelf on top and a loaf pusher. Loaves are fed through the slicer by a weight assisted gravity chute.

## FEATURES, BENEFITS & WARRANTY

- Tabletop model
- Includes device for bagging breads
- Crumb tray included
- Capacity of up to 240 loaves per hour
- 22" (559mm) long gravity infeed chute)
- Slices thickness:
  - **SM302:** 5/8" (16mm)
  - **SM302A:** 3/4" (19mm)
  - **SM302B:** 1/2" (13mm)
  - **SM302C:** 1" (25mm)
- Two year parts and one year labor limited warranty

## OPTIONAL

- Additional bread pusher (PPTMT)
- Stainless steel table on casters (SM302T)



# CPF SERIES BREAD SLICER

## DESCRIPTION

Doyon's CPF Series are the most effective bread slicer on today's market. Slice up to 100 loaves per hour. It comes with a standard packing shelf and crumb drawer. Push the handle, put your bread and release the handle, slicer blades automatically start, breads are pushed through with a safety loaf pusher that passes each loaf completely through the slicer blades. The motor stops automatically when the loaf is sliced.

## FEATURES, BENEFITS & WARRANTY

- Slices thickness:
  - Bread maximum length 17 5/16" (440mm)
    - **CPF412:** 1/2" (12mm)
    - **CPF416:** 5/8" (16mm)
    - **CPF418:** 3/4" (19mm)
    - **CPF422:** 7/8" (22mm)
  - Bread maximum length 20 1/2" (520mm)
    - **CPF512:** 1/2" (12mm)
    - **CPF516:** 5/8" (16mm)
    - **CPF518:** 3/4" (18mm)
- Floor model
- Crumb drawer is included
- Includes device for bagging breads
- Capacity of up to 100 loaves per hour
- 4 casters (2 with locks)
- Motor only operates while cutting and automatically stops after bread has been cut
- Mechanically assisted infeed
- Progressive traction level
- Two years parts and one year labor warranty



CPF412



CPF416



CPF422



CPF512



CPF516



CPF518