

COXREELS® V Series spring driven and hand crank vacuum hose reels are available in both vacuum only and vacuum/pneumatic combinations. Both are designed to extract unwanted fumes, particles and by-products from your work area. The vacuum/pneumatic models have dual plumbing for vacuum extraction while simultaneously powering pneumatic tools such as grinders and sanders in an enclosed efficient system.

V SERIES

HOSE						LESS HOSE			SIZE INDEX
MODEL	DESCRIPTION	VACUUM			APRX. LBS.	MODEL	APRX. LBS.		
		INLET	CAP.	VAC. HP					
V100 SERIES									
V-112H-730	Vacuum Only, Direct Crank	1½" - 2"Cuff	30' of 1¼" Vac hose	Less than 5HP	24	V-112-730	19	1	
V-117H-835	Vacuum Only, Direct Crank	1½" - 2"Cuff	35' of 1½" Vac hose	Less than 5HP	35	-	-	2	
V-117H-850	Vacuum Only, Direct Crank	1½" - 2"Cuff	50' of 1½" Vac hose	5HP or more	38	V-117-850	30	2	
LESS HOSE									SIZE INDEX
MODEL	DESCRIPTION	VACUUM		AIR		APRX. LBS.			
		INLET	CAP.	INLET	CAP.				
V1175 SERIES									
V-1175-850	Vacuum Only, Direct Crank	1½" NPT	50'	-	-	118	3		
V-1175-850-C	Vacuum Only, Bevel Front Crank	1½" NPT	50'	-	-	121	4		
V-1175-850-T	Vacuum Only, Bevel Top Crank	1½" NPT	50'	-	-	121	4		
VA-1175-850*	Vacuum & Air, Rim Rewind	1½" NPT	50'	1½" NPT	50'	123	5		
VA-1175-850-C*	Vacuum & Air, Bevel Front Crank	1½" NPT	50'	1½" NPT	50'	126	5		
VA-1175-850-T*	Vacuum & Air, Bevel Top Crank	1½" NPT	50'	1½" NPT	50'	126	5		
V SERIES									
V-SLPL-825	Vacuum Only, Spring Rewind	1½" NPT	25'	-	-	102	6		
VA-DLPL-825*	Vacuum & Air, Spring Rewind	1½" NPT	25'	1½" NPT	25'	107	7		

*VA models have dual plumbing for both vacuum & air applications, pneumatic swivel inlet is solid brass 1/2" NPT 300 PSI swivel

REEL DIMENSIONS


Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	Ø	Dw
1	23 1/8"	13"	12"	14 1/8"	6"	5 1/2"	12 1/2"
2	23 5/8"	18"	17"	15"	6"	6 3/4"	13 1/2"
3	24 7/8"	26 1/8"	24"	17 1/8"	20 1/4"	10 1/2"	11 5/8"
4	22"	26 1/8"	24"	17 1/8"	20 1/4"	10 1/2"	11 5/8"
5	21 3/4"	26 1/8"	24"	17 1/8"	20 1/4"	10 1/2"	11 5/8"
6	17 1/2"	24 1/2"	26 3/8"	15 3/8"	25"	10 1/2"	7 1/2"
7	20 1/8"	24 1/2"	26 3/8"	15 3/8"	25"	10 1/2"	7 1/2"

Overall Dimensions

Base

Drum

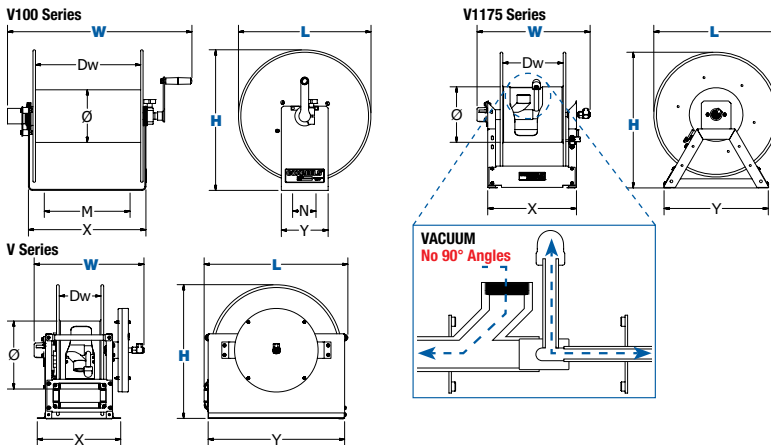

V SERIES :: REEL SPECIFICATIONS

V100 SERIES

- Direct hand crank reel with a solid one piece steel "U" shaped frame design
- Lightweight & compact design makes this reel the ideal solution for commercial vacuum systems
- Direct connect port for vacuum hose with bullet cuffs
- Adjustable tension brake to prevent "free-wheeling" during operation, transport or storage
- Swivel allows for the connection of 1 1/2" and 2" hose on the inlet.

V1175 SERIES

- Sturdy all welded "A" frame base with a double supported steel axle
- Bevel gear hand crank (Removable handle for compact storage)
- Low profile outlet riser & open drum slot design, provide a non-crimping, flat smooth hose wrap

V SERIES

- Enclosed factory tuned & matched cartridge-style spring motor
- Sturdy box-style frame with heavy duty steel cross supports to all four corners for extra rigidity
- Low profile outlet riser & open drum slot design, provide a non-crimping, flat smooth hose wrap
- Self-lubricated flange bearings & multi-position lock ratchet
- Lubricated factory matched cartridge-style spring motor
- Heavy duty 1" O.D non-corrosive stainless steel rollers
- Cast iron lock ring with non-sparking bronze pawl

SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

POSSIBLE FIELDS OF APPLICATION

- Vacuum Operation
- General Industrial
- Manufacturing Plants & Facilities
- Maintenance, Repair & Operations
- Construction Sites

ACCESSORIZE YOUR REEL :: Pg 56

- O-Rings & Swivels
- Roller Brackets
- Hoses
- Assorted Reel Accessories



WARNING: Cancer and reproductive Harm – See page 63 for more information – www.P65Warning.ca.gov