

Two Handle Deck-Mount Faucet

COMMERCIAL



SPECIFICATION: (EXAMPLE)

- **HEAVY DUTY CAST BRASS** sink faucet
- 4" (102mm) center two handle
- Polished chrome-plated finish
- **BRASS** swing spout or 3/8" IPS **BRASS PIPE** Rigid/Swivel Gooseneck Spout
- Metal hold-down package
- Designed for routine 180°F (82°C) disinfection cycles up to 30 mins
- **CER-TECK®** 1/4 turn ceramic structures


OPTIONAL FEATURES

- 120° Limited swing gooseneck
- Color indexed metal handles with vandal resistant screws
- Copper Defense™ technology with CuVerro Shield™ alloys
 - Safe to use, no harmful chemicals
 - Efficacy for life of the product
 - Durable materials
 - Laboratory testing has shown that when cleaned regularly this surface:
 - Reduces bacteria contamination, achieving 99.9% reduction within 2 hours of exposure
 - Delivers continuous and ongoing antibacterial action

MODEL NUMBER EXAMPLE:

Configurations vary, see below for availability.

27C4944-TI

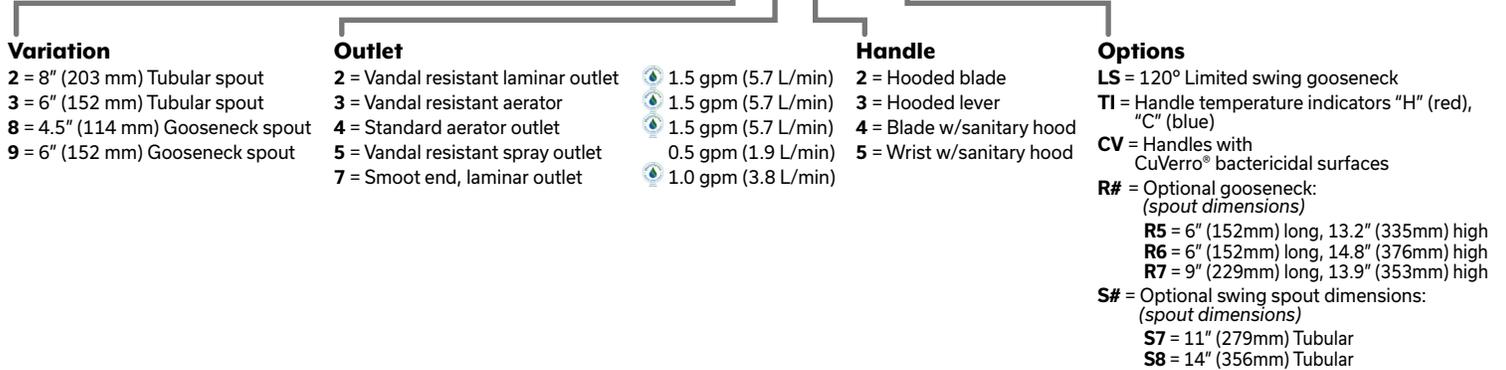

AVAILABLE MODELS		VARIATIONS						
		2 Tubular S5 Spout 8" (203 mm)	3 Tubular S3 Spout 6" (152 mm)	8 Gooseneck R2 Spout 4.5" (114 mm) long, 11.75" (298 mm) high	9 Gooseneck R4 Spout 6" (152mm) long, 11.8" (295mm) high			
2 Hooded Blade 4" (102 mm)		27C4222 27C4232 27C4242 27C4242-S7	27C4332 27C4342	27C4822 27C4832 27C4842	27C4842-TI 27C4852 27C4872	27C4922 27C4922-LS-TI 27C4922-R7 27C4932 27C4932-R7	27C4942 27C4942-LS 27C4942-R6 27C4952 27C4952-LS	27C4972
3 Hooded Lever 3" (76 mm)		27C4223 27C4233 27C4243 27C4243-S8 27C4253	27C4323 27C4333 27C4343 27C4353	27C4823 27C4833 27C4833-TI 27C4843	27C4843-TI 27C4853 27C4873	27C4923 27C4933 27C4933-LS 27C4933-R7	27C4943 27C4943-R7 27C4953 27C4973-TI	
4 Blade with Sanitary Hood 4" (102 mm)		27C4224 27C4234 27C4244 27C4254	27C4324 27C4344	27C4824 27C4834 27C4834-TI 27C4844	27C4844-TI 27C4854 27C4874 27C4874-TI	27C4924 27C4924-LS 27C4924-R5 27C4924-R7 27C4924-TI 27C4934 27C4934-LS 27C4934-TI	27C4934-LS-TI 27C4934-R7 27C4944 27C4944-LS 27C4944-LS-TI 27C4944-R5 27C4944-R7	27C4944-TI 27C4954 27C4954-LS-TI 27C4954-R7 27C4974 27C4974-R7 27C4974-TI
5 Wrist with Sanitary Hood 6" (152 mm)		27C4235		27C4835 27C4845		27C4925 27C4925-R7 27C4955	27C4975 27C4975-CV	

Suffix "CV" models:

Clean and sanitize according to standard practice. Healthcare facilities must maintain the product in accordance with infection control guidelines. The use of this surface is a supplement to and not a substitute for standard infection control practices; users must continue to follow all current infection control practices, including those practices related to cleaning and disinfection of environmental surfaces. This surface has been shown to reduce microbial contamination, but does not necessarily prevent cross contamination.

CuVerro® and CuVerro Shield™ are registered trademarks of Wieland North America, Inc. and are used with permission. Watersense® is a registered trademark of the U.S. Environmental Protection Agency.

Delta Faucet reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

Flow Rates are at 60 PSI.

NOTICE Use all pages as product submittal sheets.

DSP-27C45, Rev. K

Two Handle Deck-Mount Faucet

COMMERCIAL

APPROVALS:

- Complies to ASME A112.18.1/CSA B125.1
- Indicates compliance to ICC / ANSI A117.1
- Outlet options 2, 3, 4 and 7 are EPA WaterSense listed
- Verified compliant with 0.25% weighted average Pb content regulations
- Suffix "-CV" models are surfaced with CuVerro® alloys which are registered with Health Canada PMRA and the EPA

HANDLE TEMPERATURE INDICATORS

- Suffix "-TI" signifies handle temperature indicators "H" (red), "C" (blue). Available on selected models.



COPPER DEFENSE™ HANDLES WITH CUVERRO® BACTERICIDAL SURFACES

(Available for separate order)

- 061392A Convert to "-CV" #2, 4" hooded blade handles
- 061393A Convert to "-CV" #3, 3" hooded lever handles
- 061394A Convert to "-CV" #4, 4" blade handles with sanitary hood
- 061395A Convert to "-CV" #5, 6" wrist handles with sanitary hood

LIMITED SWING GOOSENECK

- Suffix "-LS" signifies 120° Limited Swing. Available on selected models.


FOR OPTIONAL RIGID/SWIVEL & LIMITED SWING SPOUTS

- See DSP-R/S for detailed specification.

FOR OPTIONAL SWING SPOUTS

- See DSP-S/S for detailed specification.

FLOW RATE vs PRESSURE:

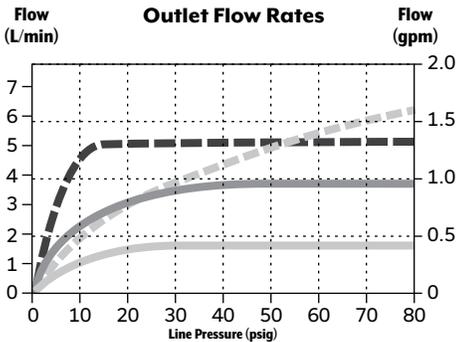


Spout Outlets	
	No. 2 Laminar Flow Outlet
	No. 3 & 4 Aerator
	No. 5 Low Flow Outlet
	No. 7 Flow Control

NOTICE Measurements may vary ± 0.25" (6mm)

Suffix "-CV" models:

Clean and sanitize according to standard practice. Healthcare facilities must maintain the product in accordance with infection control guidelines. The use of this surface is a supplement to and not a substitute for standard infection control practices; users must continue to follow all current infection control practices, including those practices related to cleaning and disinfection of environmental surfaces. This surface has been shown to reduce microbial contamination, but does not necessarily prevent cross contamination.

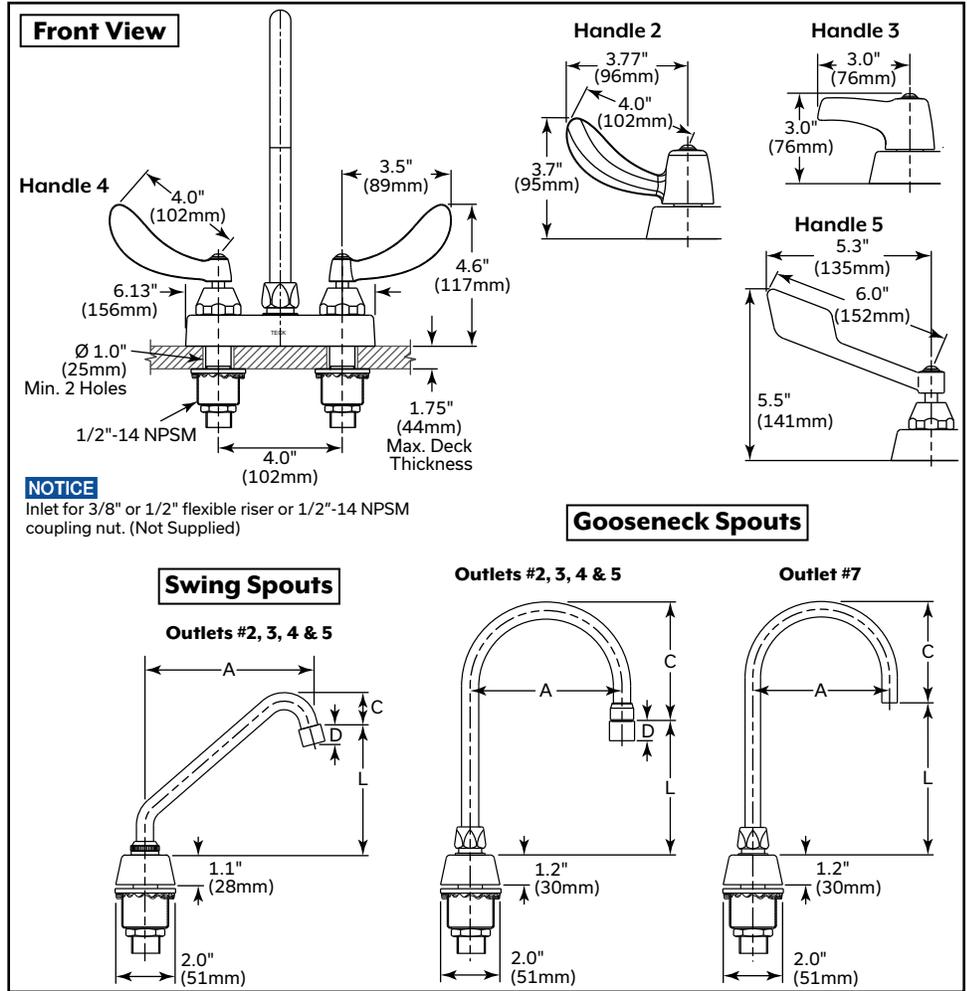

Outlet No.	"D"	
	in.	mm
2	0.69	18
3	0.69	18
4	0.67	17
5	0.69	18

Swing Spout Assemblies							
Spout No.	Spout Type/Outlet	"A"		"C"		"L"	
		in.	mm	in.	mm	in.	mm
2	8" Tubular Spout (S5)/Outlets #2, 3, 4 & 5	8.25	210	2.0	51	5.8	147
3	8" Tubular Spout (S3)/Outlets #2, 3, 4 & 5	6.4	163			4.2	107

Gooseneck Spout Assemblies							
Spout No.	Spout Type/Outlet	"A"		"C"		"L"	
		in.	mm	in.	mm	in.	mm
8	Gooseneck Spout (R2)/Outlets #2, 3, 4 & 5	4.5	114	4.1	104	6.7	170
	3.8			97	7.0	178	
9	Gooseneck Spout (R4)/Outlets #2, 3, 4 & 5	6.0	152	4.9	124	5.8	146
	4.6			117	6.0	152	

Engineer/Architect Approval	
Model Specified:	
Approval:	Date: