



Justrite Safety Group

Since 1894 / PROTECTING PEOPLE, PROPERTY AND THE PLANET® / eagle-mfg.com





Product Catalog

SAFETY CABINETS
SAFETY CANS
SPILL CONTAINMENT
POLY DRUMS
MATERIAL HANDLING





Eagle Manufacturing Company

eagle-mfg.com / 304.737.3171







Our Story

For over 125 years, Eagle Manufacturing Company has provided innovative quality industrial safety products to customers. Our legacy is built around our employees' hard work and the quality of our products.

Eagle was built around three principles—integrity, innovation and customer service. Our product offering and processes have changed since 1894, but our early mission of Protecting People, Property and the Planet® remains steadfast. The center of Eagle's mission is, and always has been, our loyal customers.

Since its inception, all of Eagle's products are USA Made and by the best craftsmen in the industry. Eagle customers are assured they have the highest quality of products, with the most innovative features, at the best value on the market—and all supported by exceptional customer service.

Eagle manufactures the world's largest lines of industrial safety products, including safety cabinets, safety cans, spill containment, poly drums, guards/protectors and traffic safety products. Our newest line of products comprises models of poly drums, flexible containment berms, metal spill pallets, lightweight security bollards, machine guards, poly rack guards, poly spill kits, industrial waste carts and modular poly cabinets.

Eagle's production capacity has evolved over more than a century and has required new manufacturing, storage, and distribution space to accommodate innovation and growth. Since 2013, we've grown our plastics production capacity and distribution center by nearly 100,000 square feet and added a 50,000-square-foot fabrication center with an engineering testing lab.

In 2018, Justrite Safety Group acquired Eagle. Portfolio companies within the Justrite Safety Group offer a wide range of workplace safety products designed with regulatory compliance in mind. Our partnership has allowed for further opportunities to expand Eagle's safety compliance solutions and material handling product lines in markets worldwide. This effort has proven to fuel revenue growth, create additional job opportunities and provide for greater economic impact in our community, state and region—and it's something we're all very proud of.

The entire Justrite Safety Group shares the same dedication to protecting where the world works and ensuring every customer achieves and maintains compliance. Our combined family offers an unrivaled portfolio of essential industrial safety solutions with equipment, systems and technologies ranging from the basic to the highly complex.

On behalf of all of us here at Eagle and Justrite Safety Group, we sincerely thank each of our customers for your loyalty, support and trust as we continue to work together for many years to come in our mission to Protect People, Property and the Planet®.



"Our Goal is to Excel in Manufacturing and Marketing and to be the Supplier of Choice to our Customers."

Mark McElhinny, President, CEO, Justrite Safety Group

"Product quality is the foundation to achieve our vision of Protecting People, Property and the Planet. Every day we commit to a process to meet our objectives of ensuring best-in-class products and customer experience. Eagle manufactures and designs with compliance in mind. Our products meet or exceed regulatory and third-party standards. Our dedication to quality, continual improvement and a readily available product line, makes us the supplier of choice for our customers."

-Dave Harvey, Vice President of Operations

SAFETY CABINETS

- 4 Standard Cabinet Features
- 6 Flammable Storage Cabinets
- 8 Tower™ Cabinets
- 9 Paint & Ink Tower™ & Paint & Ink Cabinets
- 10 Drum Safety & Haz-Mat Cabinets
- 11 Pesticide Cabinets
- 12 Metal Acid & Corrosive Cabinets
- 13 Poly Acid & Corrosive Cabinets
- 14 Modular *Quik-Assembly*™ Poly Cabinets
- 16 Office Supply Cabinets
- 17 Cabinet Accessories

SAFETY CANS

- 19 Cantastic Standard Safety Can Features
- 20 Type I Galvanized Safety Cans Flammables & Diesel
- 21 Type I Galvanized Safety Cans Kerosene & Combustibles
 22 Type II Safety Cans Flammables, Diesel, Kerosene & Combustibles
- 23 Lab & Faucet Cans & DOT Cans
- 24 Disposal Cans Poly, Galvanized, Stainless & Specialty Use Cans
- 25 Plunger, Bench, Daub Cans
- 26 Poly Waste Cans
- 27 Standard Cigarette Receptacle, Butt Cans & SafeSmoker™

SPILL CONTAINMENT

- 29 Spill Containment Features
- 30 Budget Basin Platforms
- 31 Spill Pallets
- 32 Modular Spill Platforms
- 34 Metal Spill Pallets & Drum Stackers
- 36 Outdoor Drum Storage & Workstations
- 37 IBC Containment Units, Boxes & e-CARTS
- 38 Spill Containment Sumps
- 39 Drum Dollie, Bogie & eCart
- 40 Utility Tray, Single Drum Containment Unit
- 41 Mobile Spill Platform and Drum Accessories

©EAGLE MANUFACTURING COMPANY, 2019 Eagle Manufacturing Company reserves the right to change construction, specifications, prices and terms without notice, and without obligation as to products already shipped.

FLEXIBLE SPILL CONTAINMENT

- 42 SpillNEST™ Quik-Deploy & Folding
- 44 Spill*NEST*™ Berm with Removable Sidewalls
- 46 Talon™ SX & Spill Berm & Spill NEST™ Drip Pads
- 48 Talon™ Drive-In/Out, Spill*NEST™* Rail Containment & Pools
- 49 Drip NEST™ Leak Diverter, Hose Wraps & Bibbs
- 50 Storm NEST™ Basin Inserts, Drain Covers & Berm Accessories

POLY DRUMS

- 52 Poly Drum Features
- 53 10-Gallon (37.9 L) Drums
- 54 14-Gallon (53 L) Drums
- 55 20-Gallon (75.7 L) Drums
- 56 30-Gallon (113.6 L) Drums
- 57 40-Gallon (151.4 L) Drums
- 58 55-Gallon (208.2 L) Drums
- $60\,$ 65-Gallon to 95-Gallon (246 L 359.6 L) Drums

MATERIAL HANDLING

- 62 Guards & Protectors Features
- 64 Bollard Posts, Machine Guards, Wall & Corner Protectors
- 65 Column Protectors & Rack Guard
- 66 Bollards, Bumper Post Sleeves & e-CARTS
- 68 Parking Stops, Poly Guide-Post Delineators™, Bollard Post Sleeves & Combos
- 70 Portable Dockplate & Ramps, Fixed Dockplates, Airplane Service Ramp

NOTICE:

According to California Health and Safety Code section 25249.5 et seq. ("Prop 65") and one of its enabling regulations at 27 CCR § 25600.2(b), California law requires any company to declare if their products contain certain substances, as so listed on https://oehha.ca.gov/proposition-65/proposition-65-list for products sold in California.

Please note this catalog now identifies Eagle products requiring this notification as shown in the specification charts with the following symbol:

Many products have a very small percentage of the overall components that requires a Prop 65 warning, such as self-closing safety cabinets. The small fusible link that holds the doors open contains lead. This is less than 1% of the total cabinet construction.

2 sales@eagle-mfg.com







A leader in the manufacturing of Safety Cabinets for nearly 50 years, Eagle Manufacturing has set the industry standard for high-quality Safety Cabinets for the storage of flammables and other liquids. In 2011, Eagle designed a new state-of-the-art production facility and created a cabinet design incorporating improved convenience and safety features. Our Safety Cabinet product line is designed and manufactured to best meet the ever-changing needs of today's business, industrial and laboratory environments and is made in the USA.

Eagle Steel Safety Cabinet features include:

- Reinforced double wall construction with 1½ in. (3.8 cm.) air space on sides, top, bottom, back and doors
- Constructed of 18-gauge steel
- Lead-free, high-gloss, baked-on powder finish
- Continuous piano hinges
- Ground connection
- Four adjustable galvanized leveling legs
- Trilingual warning labels
- 2 in. (5.1 cm.) raised leakproof sill
- Patented, adjustable galvanized steel shelves direct spills to back and bottom of leakproof sump and hold 350 lbs. (158.8 kg.) Uniform Distributed Load (UDL)
- Internal and external welded construction
- Two 2 in. (5.1 cm.) internal vents with fire baffle and cap
- Flush mounted door handle with key lock

- Three-point stainless steel bullet latching system provides fail-safe, positive door closure with increased heat and corrosion resistance
- 3 in. (7.6 cm.) centers for shelf brackets
- Self-latching doors
- Door closings: Manual Close (180° Opening) Self-Closing (135° Opening)
- Self-closing cabinets only:
- Concealed self-close mechanism provides obstruction-free access to top shelf space
- Self-indexing doors close in sequence and ensure a tight closure from top to bottom

(Available in 2- (7.6 L) to 110- (426.4 L) gallon sizes. Manual Close or Self-Closing.)






	FLAMMABI	E LIQUID SA	AFETY CABINE	ETS				+					1 1 1		
NEV Senter	NI Z	Second 1		Manage of the Control	A THE STATE OF THE	Supply A =		A TOTAL STATE OF THE PARTY OF T	TANKARI A =			A CONTROLLAR		A TOTAL STATE OF THE PARTY OF T	
Capacity (Gal.)	7.6 L 2 gal.	15.2 L 4 gal.	45.5 L 12 gal.	56.7 L 15 gal.	60.6 L 16 gal.	83.3 L 22 gal.	90.9 L 24 gal.	90.9 L 24 gal.	113.6 L 30 gal.	170.4 L 45 gal.	181.7 L 48 gal.	227.2 L 60 gal.	227.2 L 60 gal.	227.2 L 60 gal.	340.7 L 90 gal.
Common Name	Bench Top	Bench Top	Space Saver	Add On	Space Saver	Under Counter	Wall- Mount	Space Saver	Standard 30	Standard 45	Deep Space Saver	Single Door 60	Standard 60	Work Bench	Standard 90
Model Numbers Door Self Close: Styles Manual Close: Sliding Self Close:	1900X <u>^</u> 1901X -	1903X <u>↑</u> 1904X –	1924X <u>↑</u> 1925X –	ADD14X <u>↑</u> ADD15X –	1905X 🛧 1906X –	1970X <u>↑</u> 1971X –	1975X <u>↑</u> 1976X –	2310X <u>↑</u> 1923X –	3010X ▲ 1932X 1930X ▲	4510X <u>↑</u> 1947X 1945X <u>↑</u>	4610X <u>↑</u> 1946X –	6110X <u>↑</u> 1961X –	6010X <u>↑</u> 1962X –	6410X <u>↑</u> 1964X –	9010X <u>↑</u> 1992X –
Outside Width: Dimensions Depth: Height:	cm. 43.2 17 43.2 17 45.7 18	cm. 43.2 17 43.2 17 55.9 22	cm. in. 59.1 23¼ 45.7 18 88.9 35	cm. in. 109.2 43 45.7 18 61 24	cm. in. 59.1 23½ 45.7 18 111.8 44	cm. in. 88.9 35 55.9 22 88.9 35	cm. in. 109.2 43 30.5 12 111.8 44	cm. in. 59.1 231/4 45.7 18 165.1 65	cm. in. 109.2	cm. in. 109.2 43 45.7 18 165.1 65	cm. in. 59.1 23½ 86.4 34 165.1 65	cm. in. 86.4 34 86.4 34 165.1 65	cm. in. 86.4 34 86.4 34 165.1 65	cm. in. 109.2 43 86.4 34 111.8 44	cm. in. 109.2 43 86.4 34 165.1 65
Inside Width: Dimensions Depth: Height:	cm. 34.9 13¾ 34.9 13¾ 36.8 14½		cm. 50.8 20 37 14.6 77.5 30½	cm. in. 100.3 39½ 37 14.6 49.5 19½	cm. in. 50.8 20 37 14.6 100.3 39½	cm. in. 80.6 31¾ 47.6 18¾ 67.3 26½	cm. in. 101 39¾ 22.2 8¾ 100.3 39½	cm. in. 50.8 20 37 14.6 153.7 60½	cm. in. 100.3 39½ 37 14.6 100.3 39½	cm. in. 100.3 39½ 37 14.6 153.7 60½	cm. in. 50.8 20 77.1 30.3 153.7 60½	cm. in. 78.1 30¾ 77.1 30.3 153.7 60½	em. in. 78.1 30 % 77.1 30.3 153.7 60 ½	cm. in. 100.3 39½ 77.1 30.3 100.3 39½	cm. in. 100.3 39½ 77.1 30.3 153.7 60½
No. of Shelves Extra Shelf Model No.	1 29935	1 29935	1 29936	1 29937	1 29936	1 29939	3 29938	3 29936	1 29937	2 29937	3 29941	2 29944	2 29944	1 29945	2 29945
Shelf Depth	33 cm. 13 in.	33 cm. 13 in.	35.6 cm. 14 in.	35.6 cm. 14 in.	35.6 cm. 14 in.	45.7 cm. 18 in.	21.9 cm. 8 5% in.	35.6 cm. 14 in.	35.6 cm. 14 in.	35.6 cm. 14 in.	73.7 cm. 29 in.	73.7 cm. 29 in.	73.7 cm. 29 in.	73.7 cm. 29 in.	73.7 cm. 29 in.
Maximum Weight	27.7 kg. 61 lbs.	30.8 kg. 68 lbs.	60.8 kg. 134 lbs.	76.7 kg. 169 lbs.	70.8 kg. 156 lbs.	88 kg. 194 lbs.	102.5 kg. 226 lbs.	95.3 kg. 210 lbs.	111.6 kg. 246 lbs.	145.1 kg. 320 lbs.	142.4 kg. 314 lbs.	172.8 kg. 381 lbs.	212.7 kg. 469 lbs.	189.6 kg. 418 lbs.	218.2 kg. 481 lbs.
Compliance	OSHA	OSHA	OSHA	SHA	NEPA OSHA	AHEO GEES	SEPA OSHA	AHRO SHA	AHRO M	SHA OSHA	SHA OSHA	NEFA OSHA	NEPA OSHA	NEED OSHA	NEES OSHA
Approvals	_	-	FM	FM	FM	FM	FM	FM	FM	FM	FM	FM	FM	FM	FM



Did you know?

Improper storage and handling of flammable liquids is the leading cause of industrial fires. All steel cabinets meet NFPA Code 30 and OSHA specifications. Self-closing models meet Uniform Fire Code and NFPA Code One requirements.

Three door styles to choose from:



1947X Door **Manual Close**



1945X Sliding Door Self-Closing (30-& 45-gallon only)





4510X Door **Self-Closing**





	TOWER [™] SA	FETY CABINET	rs [Yellow only	1			PAINT & INK	TOWER [™] SAF	ETY CABINETS		PAINT &	& INK SAFETY CABINETS				
NE STATE OF THE ST	W!			A ==	A DESCRIPTION OF THE PROPERTY				•	PANNAD?		Control of the contro	•	*		
		KIE			SON SON			100 100 100 100 100 100 100 100 100 100		Accepted to the second			東京 ででは 東京 東京 東京 東京 東京 東京 東京			
Capacity (Gal.)	45.5 L 12 gal.	60.6 L 16 gal.	113.6 L 30 gal.	170.4 L 45 gal.	227.2 L 60 gal.	340.7 L 90 gal.	151.4 L 40 gal.	227.2 L 60 gal.	363.4 L 96 gal.	90.8 L / 24 gal. (168 Aerosol Cans)	113.6 L / 30 gal. (252 Aerosol Cans)	151.4 L 40 gal.	227.2 L 60 gal.	363.4 L 96 gal.		
Common Name	Space Saver	Space Saver	Standard 30	Standard 45	Standard 60	Standard 90	Standard 40	Standard 60	Standard 96	Aerosol Can Storage	Aerosol Can Storage	Standard 40	Standard 60	Standard 96		
Model Numbers Door Styles Manual Close: Sliding Self Close:	1924XLEGS <u>A</u> 1925XLEGS –	1905XLEGS <u>↑</u> 1906XLEGS	3010XLEGS <u>↑</u> 1932XLEGS –	4510XLEGS <u>↑</u> 1947XLEGS –	6010XLEGS <u>↑</u> 1962XLEGS -	9010XLEGS <u>↑</u> 1992XLEGS –	PI32XLEGS**	Cabinets are available PI47XLEGS -	e in yellow - when ord - PI62XLEGS -	ering add a "Y" before mode 1975XRED ⚠ 1976XRED —	l number (to order 1975 or PI7710X <u>↑</u> PI77X –	PI3010X A PI30X A PI30X A	ED from the model number PI4510X 🛦 PI47X PI45X 🔥	PI6010X <u>↑</u> PI62X -		
Door Self Close: Manual Close:				1947XLEGS	1962XLEGS	1992XLEGS - cm. in. 109.2 43 86.4 34 175.3 69	PI32XLEGS*** cm. in.	-	_	1975XRED <u> </u>	P17710X <u>↑</u> P177X	PI3010X <u>↑</u> PI32X	PI4510X <u> </u>	PI62X		
Door Self Close: Styles Manual Close: Sliding Self Close: Outside Width:	1925XLEGS - cm. in.	1906XLEGS – cm. in. 59.1 231/4	1932XLEGS – cm. in. 109.2 43 45.7 18	1947XLEGS - <u>em.</u> <u>in.</u> 109.2 43 45.7 18	1962XLEGS - cm. in.	1992XLEGS - cm. in. 109.2 43 86.4 34	cm. in. 109.2 43 45.7 18	_ PI47XLEGS	PI62XLEGS - cm. in. 86.4 34 86.4 34	1975XRED <u>↑</u> 1976XRED - cm. in.	PI7710X	PI3010X A PI32X PI30X A III. 109.2 43 45.7 18	PI4510X A PI47X PI45X A cm. in. 109.2 43 45.7 18	PI62X -		
Door Self Close: Styles Manual Close: Sliding Self Close: Outside Width: Dimensions Depth: Height: Inside Width: Dimensions Depth: Depth: Depth: Depth: Depth: Depth:	1925XLEGS	1906XLEGS	1932XLEGS - cm. in. 43 445.7 18 121.9 48 cm. in. 100.3 39½ 37 14.6	1947XLEGS - <u>cm.</u> in. 109.2 43 45.7 18 175.3 69 <u>cm.</u> in. 100.3 39½ 37 14.6	1962XLEGS - cm. in. 86.4 34 86.4 34 175.3 69 cm. in. 78.1 3034	1992XLEGS - cm. in. 109.2 43 86.4 34 175.3 69 cm. in. 100.3 39½ 77.1 30.3	cm. in. 109.2 43 45.7 18 121.9 48 cm. in. 100.3 39½ 37 14.6	- PI47XLEGS - in. 109.2 43 45.7 18 175.3 69	PI62XLEGS - cm. in. 86.4 34 86.4 34 175.3 69 cm. in. 78.1 3034 77.1 30.3	1975XRED	PI7710X ▲ PI77X - in. 109.2 43 30.5 12 165.1 65 cm. in. 100.3 39½ 21.7 8.66	PI3010X A PI32X PI30X A Cm. in. 109.2 43 45.7 18 111.8 44 Cm. in. 100.3 39½ 37 14.6	PI4510X A PI47X PI45X A cm. in. 109.2 43 45.7 18 165.1 65 cm. in. 100.3 39½ 37 14.6	PI62X - cm. in. 86.4 34 86.4 34 165.1 65 cm. in. 78.1 3034		
Door Self Close: Styles Manual Close: Sliding Self Close: Outside Dimensions Depth: Height: Inside Dimensions Depth: Height: No. of Shelves	1925XLEGS	1906XLEGS	1932XLEGS - cm. in. 109.2 43 45.7 18 121.9 48 48 48 48 48 48 48 4	1947XLEGS - cm. in. 109.2 43 45.7 18 175.3 69 cm. in. 100.3 39½ 37 14.6 153.7 60½	1962XLEGS	1992XLEGS - cm. in. 109.2	cm. in. 109.2 43 45.7 18 121.9 48 cm. in. 100.3 39½ 37 14.6 100.3 39½	PI47XLEGS - Cm. in. 109.2 43 45.7 18 175.3 69 Cm. in. 100.3 39½ 37 14.6 153.7 60½	PI62XLEGS - cm. in. 86.4 34 86.4 34 175.3 69 cm. in. 78.1 3034 77.1 30.3 153.7 60½	1975XRED ↑ 1976XRED −	PI7710X ♠ PI77X - cm. in. 109.2 43 30.5 12 165.1 65 cm. in. 100.3 39½ 21.7 8.6 153.7 60½	PI3010X A PI32X PI30X A Em. in. 109.2 43 45.7 18 111.8 44 Em. in. 100.3 39½ 37 14.6 100.3 39½ 3	PI4510X ▲ PI47X PI45X ▲ cm. in. 109.2 43 45.7 18 165.1 65 cm. in. 100.3 39½ 37 14.6 153.7 60½	PI62X - cm. in. 86.4 34 34 165.1 65 cm. 78.1 3034 77.1 30.3 153.7 60½		
Door Self Close: Styles Manual Close: Sliding Self Close: Outside Dimensions Depth: Height: Inside Dimensions Depth: Depth: Height: No. of Shelves Extra Shelf Model No.	1925XLEGS	1906XLEGS - cm. in. 59.1 23¼ 45.7 18 121.9 48 cm. in. 50.8 20 37 14.6 100.3 39½ 1 29936 35.6 cm.	1932XLEGS - cm. in. 109.2 43 45.7 18 121.9 48 48 48 48 48 48 48 4	1947XLEGS - cm. in. 109.2 43 45.7 18 175.3 69 cm. in. 100.3 39½ 37 14.6 153.7 60½ 2 29937 35.6 cm.	1962XLEGS - cm. in. 86.4 34 86.4 34 175.3 69 cm. in. 78.1 30.34 77.1 30.3 153.7 60½ 2 29944 73.7 cm.	1992XLEGS - cm. in. 109.2 43 86.4 34 175.3 69 cm. in. 100.3 39½ 77.1 30.3 153.7 60½ 2 29945 73.7 cm.	cm. in. 109.2 43 45.7 18 121.9 48 cm. in. 100.3 39½ 37 14.6 100.3 39½ 3 29937 35.6 cm.	PI47XLEGS - cm. in. 109.2 43 45.7 18 175.3 69 cm. in. 100.3 39½ 37 14.6 153.7 60½ 5 29937 35.6 cm.	PI62XLEGS - m. in. 86.4 34 86.4 34 175.3 69 m. in. 78.1 303/4 77.1 30.3 153.7 60½ 5 29944 73.7 cm.	1975XRED ↑ 1976XRED	PI7710X ▲ PI77X - In	PI3010X A PI32X PI30X A III. III. III. III. III. III. III. I	PI4510X A PI47X PI45X A Sem. In. 109.2 43 45.7 18 165.1 65 Sem. In. 100.3 39½ 37 14.6 153.7 60½ 5 29937 35.6 cm.	PI62X - cm. in. 86.4 34 86.4 34 165.1 65 cm. in. 78.1 3034 77.1 30.3 153.7 60½ 5 29944 73.7 cm.		
Door Self Close: Styles Manual Close: Sliding Self Close: Outside Dimensions Depth: Height: Inside Dimensions Depth: Height: No. of Shelves Extra Shelf Model No. Shelf Depth	1925XLEGS	1906XLEGS - cm. in. 59.1 23¼ 45.7 18 121.9 48 cm. in. 50.8 20 37 14.6 100.3 39½ 1 29936 35.6 cm. 14 in. 76.2 kg.	1932XLEGS - cm. in. 109.2 43 45.7 18 121.9 48 cm. in. in. 100.3 39½ 37 14.6 100.3 39½ 14.6 100.3 39½ 14.6 100.3 39½ 14.6 100.3 14.6 100.3 14.6 100.3 14.6 100.3 14.6 100.3 14.6 100.3 14.6 100.3 14.6 100.3 14.6 100.3 14.6 100.3 14.6 100.3 14.6 100.3 14.6 100.3 14.6 100.3 14.6 100.3 14.6 100.3 14.6 100.3 14.6 100.3 14.6 100.3 100.	1947XLEGS - cm. in. 109.2 43 45.7 18 175.3 69 cm. in. 100.3 39½ 37 14.6 153.7 60½ 2 29937 35.6 cm. 14 in. 143.8 kg.	1962XLEGS - cm. in. 86.4 34 86.4 34 175.3 69 cm. in. 78.1 30.3 77.1 30.3 153.7 60½ 2 29944 73.7 cm. 29 in. 182.2 kg.	1992XLEGS - cm. in. 109.2 43 86.4 34 175.3 69 cm. in. 100.3 39½ 77.1 30.3 153.7 60½ 2 29945 73.7 cm. 29 in.	cm. in. 109.2 43 45.7 18 121.9 48 6 100.3 39½ 37 14.6 100.3 39½ 37 29937 35.6 cm. 14 in. 119.7 kg.	PI47XLEGS - cm. in. 109.2 43 45.7 18 175.3 69 cm. in. 100.3 39½ 37 14.6 153.7 60½ 5 29937 35.6 cm. 14 in. 153.3 kg.	PI62XLEGS - m. in. 86.4 34 86.4 34 175.3 69 m. in. 78.1 30.3 77.1 30.3 153.7 60½ 29944 73.7 cm. 29 in. 187.8 kg.	1975XRED ↑ 1976XRED ← 1976XRED ← cm. in. 109.2 43 30.5 12 111.8 44 cm. in. 101 39¾ 22.2 8¾ 100.3 39½ 3 29938 21.9 cm. 8 5% in. 102.5 kg.	PI7710X ▲ PI77X —	PI3010X A PI32X PI30X A PI32X PI30X A A A A A A A A A A A A A A A A A A A	PI4510X A PI47X PI45X A PI45X	PI62X - cm. in. 86.4 34 86.4 34 165.1 65 cm. in. 78.1 30.3 77.1 30.3 153.7 60½ 5 29944 73.7 cm. 29 in. 191.4 kg.		
Door Styles Manual Close: Manual Close: Sliding Self Close: Outside Dimensions Inside Dimensions Width: Depth: Height: No. of Shelves Extra Shelf Model No. Shelf Depth Maximum Weight	1925XLEGS	1906XLEGS - cm. in. 23¼ 45.7 18 121.9 48 cm. in. 50.8 20 37 14.6 100.3 39½ 1 29936 35.6 cm. 14 in. 76.2 kg. 168 lbs.	1932XLEGS - cm. in. 43 445.7 18 121.9 48 cm. in. in. 100.3 39½ 37 14.6 100.3 39½ 1 29937 35.6 cm. 14 in. 114.8 kg. 253 lbs.	1947XLEGS -	1962XLEGS - cm. in. 86.4 34 175.3 69 cm. in. 78.1 30.3 77.1 30.3 153.7 60½ 2 29944 73.7 cm. 29 in. 182.2 kg. 403 lbs.	1992XLEGS - cm. in. 109.2 43 43 44 44 44 44 44 4	cm. in. 109.2 43 45.7 18 121.9 48 cm. in. 100.3 39½ 37 14.6 39½ 3 29937 35.6 cm. 14 in. 119.7 kg. 264 lbs.	PI47XLEGS - cm. in. 109.2 43 45.7 18 175.3 69 cm. in. 100.3 39½ 37 14.6 153.7 60½ 5 29937 35.6 cm. 14 in. 153.3 kg. 338 lbs.	PI62XLEGS - m. in. 86.4 34 86.4 34 175.3 69 m. in. 78.1 30.3 153.7 60½ 5 29944 73.7 cm. 29 in. 187.8 kg. 414 lbs.	1975XRED ↑ 1976XRED ← 1976XRED ← cm. in. 109.2 43 30.5 12 111.8 44 cm. in. 101 39¾4 22.2 8¾4 100.3 39½ 3 29938 21.9 cm. 8 ½8 in. 102.5 kg. 226 lbs.	PI7710X ▲ PI77X —	PI3010X A PI32X PI30X A PI32X PI30X A A A A A A A A A A A A A A A A A A A	PI4510X	PI62X - cm. in. 86.4 34 86.4 34 165.1 65 cm. in. 78.1 3034 77.1 30.3 153.7 60½ 5 29944 73.7 cm. 29 in. 191.4 kg. 422 lbs.		

Tower cabinets include 4-inch adjustable legs for the added benefits of:

- Placing cabinets over floor or wall ventilation
- Providing easy cleaning under cabinet
- Protecting the cabinet in areas where floor moisture is a concern
- Moving with a forklift or pallet jack

Did you know?

The use of approved safety cans is your first layer of protection against fire. Storage of safety cans in approved safety cabinets provides your second layer of protection.

Paint & Ink cabinets include:

- Additional shelves for storage of one-gallon (3.8 L) paint or ink cans, or for aerosol cans
- Capacity based on the number of one-gallon (3.8 L) paint cans
- Aerosol cabinets include wall-mounting brackets. 24-gallon (90.8 L) cabinet is designed to hold up to 168 12-oz. aerosol cans and the 30-gallon (113.6 L) cabinet is designed to hold up to 252 12-oz. aerosol cans







	DRUM SAFETY	CABINETS		HAZ-MAT SAFET	Y CABINETS			PESTICIDE SAFETY O	CABINETS			
NE Enth	W! 7			A TO		100 100 100 100 100 100 100 100 100 100	NEV Entant Cabine	VI. A ced the ced to t	PLANNING OF THE PARTY OF THE PA	A AMERICAN DE LA CONTRACTOR DE LA CONTRA		The state of the s
-	200.2	200.2	A1C A I	200.2	ALC AL		A FORMACION AND AND AND AND AND AND AND AND AND AN		112.01	170.41	200.2	207.21
Capacity (Gal.)	208.2 L 55 gal.	208.2 L 55 gal.	416.4 L 110 gal.	208.2 L 55 gal.	416.4 L 110 gal.	227.2 L 60 gal.	Capacity (Gal.)	45.5 L 12 gal.	113.6 L 30 gal.	170.4 L 45 gal.	208.2 L 55 gal.	227.2 L 60 gal.
Common Name	One Drum Vertical	One Drum Horizontal	Two Drum Vertical	HAZ One Drum Vertical	HAZ Two Drum Vertical	HAZ Two Drum (30 gal. Drums)	Common Name	Space Saver	Standard 30	Standard 45	One Drum Vertical	Standard 60
Model Numbers Door Self Close: Styles Manual Close:	2610X <u>↑</u> 1926X	2810X <u>↑</u> 1928X	5510X <u>↑</u> 1955X	HAZ2610X <u>↑</u> HAZ1926X	HAZ5510X <u> </u>	HAZ9010X <u>↑</u> HAZ1992X	Model Numbers Door Styles	PEST24X <u>↑</u> PEST25X	PEST3010X 🔥 PEST32X	PEST4510X ⚠ PEST47X	PEST2610X 🗥 PEST26X	PEST6010X ▲ PEST62X
Outside Width: Dimensions Depth: Height:	cm. in. 86.4 34 86.4 34 165.1 65	cm. in. 76.2 30 121.9 48 127 50	cm. in. 149.9 59 86.4 34 165.1 65	cm. in. 86.4 34 86.4 34 165.1 65	cm. in. 149.9 59 86.4 34 165.1 65	cm. in. 109.2	Outside Dimensions	cm. in. 59.1 23 1/4 45.7 18 88.9 35	cm. 109.2 43 45.7 18 111.8 44	cm. in. 109.2 43 45.7 18 165.1 65	cm. in. 86.4 34 86.4 34 165.1 65	cm. in. 86.4 34 86.4 34 165.1 65
Inside Width: Dimensions Depth: Height:	cm. in. 78.1 30¾ 77.1 30.3 153.7 60½	cm. in. 67.9 2634 113.7 4434 115.6 451⁄2	cm. in. 142.2 56 77.1 30.3 153.7 60½	cm. in. 78.1 30¾ 77.1 30.3 153.7 60½	em. in. 142.2 56 77.1 30.3 153.7 60½	cm. in. 100.3 39½ 77.1 30.3 153.7 60½	Inside Dimensions	cm. in. 50.8 20 37 14.6 77.5 30½	em. in. 100.3 39½ 37 14.6 100.3 39½	cm. in. 100.3 39½ 37 14.6 153.7 60½	cm. in. 78.1 30¾ 77.1 30.3 153.7 60½	cm. in. 78.1 30¾ 77.1 30.3 153.7 60½
No. of Shelves Extra Shelf Model No.	1 29946	_	1 29947	1 29946	1 29947	1 29945	No. of Shelves Extra Shelf Model No.	1 29936	1 29937	2 29937	1 29946	2 29944
Shelf Depth	35.6 cm. 14 in.	-	73.7 cm. 29 in.	35.6 cm. 14 in.	73.7 cm. 29 in.	73.7 cm. 29 in.	Shelf Depth	35.6 cm. 14 in.	35.6 cm. 14 in.	35.6 cm. 14 in.	35.6 cm. 14 in.	73.7 cm. 29 in.
Maximum Weight	178.3 kg. 393 lbs.	164.7 kg. 363 lbs.	269.9 kg. 595 lbs.	196.4 kg. 433 lbs.	293.5 kg. 647 lbs.	239.5 kg. 528 lbs.	Maximum Weight	60.8 kg. 134 lbs.	108.9 kg. 240 lbs.	140.6 kg. 310 lbs.	178.3 kg. 393 lbs.	175.1 kg. 386 lbs.
Compliance	NEPA OSHA	NEPA OSHA	NEPA OSHA	NEPA OSHA	STA OSHA	AHRO MAN	Compliance	NETA OSHA	OSHA	SEP OSHA	MEPS OSHA	NEPA OSHA
Approvals	FM	FM	FM	FM	FM	FM	Approvals	FM	FM	FM	FM	FM
	ALL CABINETS I	NCLUDE STANDAR	RD FEATURES & BENEFITS S	HOWN ON PAGE 5								1



Drum safety cabinets include:

- Drum support guides in the bottom and one shelf (vertical cabinets only)
- Roller conveyors in the bottom, one shelf and hazardous waste labels on Haz-Mat safety cabinets

Did you know?

Regulations require not more than 60 gal. (227.2 L) of Class II liquids and not more than 120 gal. (454.2 L) of Class III liquids in any one safety cabinet.



Pesticide safety cabinets:

- Offer safe, secure, lockable storage of pesticides including herbicides, insecticides, fungicides and other poisons
- Provide excellent protection for companies specializing in lawn care, golf course or agricultural management
- Include poly shelf and bottom trays to help contain small spills and provide extra corrosion protection
- Are available in 100 percent polyethylene construction for storage of highly corrosive pesticides or poisons





	METAL ACID & CORROS	IVE SAFETY CABINETS				CONTRACTORIS		control contro	
Tajel	N! Z					COMMISSION			
Enhar Cabin	nced at Line	COMMONTAL	antides of the second	Constitute	mattern of the second		CONTRACTOR		
		**************************************			oic t&				
Capacity (Gal.)	15.2 L 4 gal.	45.5 L 12 gal.	56.7 L 15 gal.	60.6 L 16 gal.	83.3 L 22 gal.	90.9 L 24 gal.	113.6 L 30 gal.	170.4 L 45 gal.	227.2 L 60 gal.
Common Name	Bench Top	Space Saver	Add-On	Space Saver	Under Counter	Space Saver	Standard 30	Standard 45	Standard 60
Model Numbers									
Door Self Close: Styles Manual Close: Sliding Self Close:	CRA1903X <u>↑</u> CRA1904X -	CRA1924X <u>↑</u> CRA1925X –	ADDCRA14X <u>^</u> ADDCRAX −	CRA1905X <u>↑</u> CRA1906X -	CRA70X 🛧 CRA71X	CRA2310X <u>↑</u> CRA1923X -	CRA3010X <u>↑</u> CRA32X CRA30X <u>↑</u>	CRA4510X <u>↑</u> CRA47X CRA45X <u>↑</u>	CRA6010X <u>↑</u> CRA62X —
Outside Width: Depth: Height:	cm. in. 43.2 17 43.2 17 55.9 22	cm. in. 59.1 23½ 45.7 18 88.9 35	cm. in. 109.2 43 45.7 18 61 24	cm. in. 59.1 23 ¼ 45.7 18 111.8 44	cm. in. 88.9 35 55.9 22 88.9 35	cm. in. 59.1 231/4 45.7 18 165.1 65	cm. in. 109.2 43 45.7 18 111.8 44	cm. 109.2 43 45.7 18 165.1 65	cm. in. 86.4 34 86.4 34 165.1 65
Inside Width: Depth: Height:	cm. in. 34.9 13¾ 34.9 13¾ 44.5 17½	em. in. 50.8 20 37 14.6 77.5 30 ½	em. in. 100.3 39½ 37 14.6 49.5 19½	cm. in. 50.8 20 37 14.6 100.3 39½	cm. in. 80.6 31¾ 47.6 18¾ 67.3 26½	em. in. 50.8 20 37 14.6 153.7 60½	em. in. 100.3 39½ 37 14.6 100.3 39½	em. in. 100.3 39½ 37 14.6 153.7 60½	cm. in. 78.1 30¾ 77.1 30.3 153.7 60½
No. of Shelves Extra Shelf Model No.	1 29935	1 29936	1 29937	1 29936	1 29939	3 29936	1 29937	2 29937	2 29944
Shelf Depth	33 cm. 13 in.	35.6 cm. 14 in.	35.6 cm. 14 in.	35.6 cm. 14 in.	45.7 cm. 18 in.	35.6 cm. 14 in.	35.6 cm. 14 in.	35.6 cm. 14 in.	73.7 cm. 29 in.
Maximum Weight	30.8 kg. 68 lbs.	60.8 kg. 134 lbs.	78.9 kg. 174 lbs.	70.8 kg. 156 lbs.	89.4 kg. 197 lbs.	95.7 kg. 211 lbs.	122 kg. 269 lbs.	140.6 kg. 310 lbs.	173.3 kg. 382 lbs.
Compliance	AFR OSHA	OSHA	OSHA	OSHA	OSHA	NEPE OSHA	AHRO MEN	SEPA OSHA	OSHA
Approvals	-	FM	FM	FM	FM	FM	FM	FM	FM





- Special corrosion-resistant powder coat finish on internal and external cabinet surfaces
- Poly shelf and bottom trays to help contain small spills and provide extra corrosion protection
- Steel cabinets are not recommended for the storage of aggressive acids such as nitric, sulfuric and hydrochloric
- Also available in 100 percent polyethylene construction for storage of aggressive acids

Did you know?

Approved safety cabinets are designed to protect the contained flammable liquids for a period of 10 minutes, giving personnel time to exit in case of fire.







Two 2 in. (5.1 cm.)

Can be assembled with poly vents with caps

MODULAR QUIK-ASSEMBLY™ POLY ACID & CORROSIVE SAFETY CABINETS



Capacity (Gal.)

Model Numbers

Description

Outside

Inside

Dimensions

Dimensions

No. of Shelves

Shelf Depth

Weight

15.2 L

4 gal.

Bench Top

M04CRA

45.8 45.8 55.9

35.6 38.1 40

14 15

15¾

2

38.8 cm./15 1/4 in.

14.6 kg./32 lbs.



45.5 L

12 gal.

12-Gal. Modular

M12CRA

18 22 36

14 19

293/4

48.9 cm./19 1/4 in.

20.5 kg./45 lbs.

cm.

45.8 55.9 91.5

35.6 48.3

75.6



90.9 L

24 gal.

24-Gal. Modular

(Space Saver)

M24CRA

cm. 45.8 18 55.9 22 182.9 72

75.6 293/4

4

48.9 cm./19 1/4 in.

40.9 kg./90 lbs.

14 19

(X2)

45.8 55.9 182.9

<u>cm.</u>

35.6 48.3



90.9 L

24 gal.

24-Gal. Modular

(Under-the-Counter)

M24CRA

36 22 36

14 19

75.6 293/4

48.9 cm./19 1/4 in.

40.9 kg./90 lbs.

(X2)

cm.

91.5 55.9 91.5

35.6 48.3







M48CRA

cm. | **in.** 91.5 36 55.9 22 182.9 72 91.5 55.9 182.9

35.6 48.3 14 19 (X4)

75.6 293/4

81.7 kg./180 lbs.

48.9 cm./19 ½ in.

MODULAR *QUIK-ASSEMBLY*™ **POLY CABINETS**

Eagle introduces a new line of Modular *Quik-Assembly*™ Poly Cabinets ideal for lab or industrial settings. Made of heavy duty High Density Polyethylene, these models can be assembled in minutes without tools. The 4-gallon (15.2 L) model is a stand-alone unit, while the 12-gallon (45.5 L), 24-gallon (90.9 L) and 48-gallon (181.7 L) models can be linked and stacked to create additional vertical or horizontal units. Models can be assembled with the option of the lockable doors opening to the left or right.

Features:

- Ideal for labs and industrial settings
- Assembles in minutes, no tools required
- Lockable doors open to 180°
- Doors can be assembled to open to the left or right
- 100 percent HDPE construction
- Adjustable shelves, 38 lbs. (17.3 kg.) shelf (UDL)
- Sealed internal containment sump
- Two 2 inch (5.1 cm.) poly vents with caps
- "Caution Corrosives" label included
- Modular linkage brackets included • Additional color options on pg. 14-15

Modular Designs



lockable doors opening to

Space Saver Build 48-Gallon (181.7 L) Modular Cabinet in: 18W x 22D x 72H **cm:** 45.8W x 55.9D x 182.9H in: 36W x 22D x 72H

Model M24CRA 24-Gallon (90.9 L) Modular Cabinet

per shelf

Under-the-Counter in: 36W x 22D x 36H **Model M12CRA cm:** 91.5W x 55.9D x 91.5H 12-Gallon (45.5 L)










Sealed internal


cm: 91.5W x 55.9D x 182.9H

containment sump

Quik-Assembly[™] in minutes (No tools required)



M12CRA 12-Gallon Modular

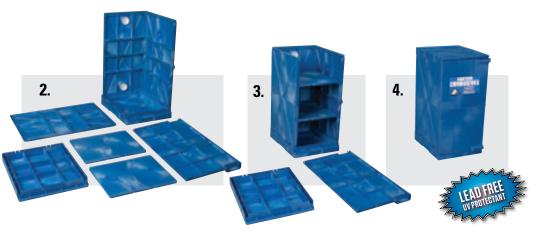

Modular Cabinet





OFFICE SUPPLY CABINET

Safety Cabinet Combos!

These combos bring you Eagle's best-selling Safety Cabinets filled



CABINET COMBOS



Capacity (Gal.) 21.5 cu. ft./ 0.6 cu.m.

Office Supply Cabinet **Common Name**

Model 19474XBE 19474XGR Numbers

cm. 109.2 43 45.8 18 165.1 65 Outside Dimensions

cm. in. Inside 100.3 39.5 37 14.6 153.7 60.5 **Dimensions**

No. of Shelves Extra Shelf Model No. 1915XBEIGE & 1915XGRAY

Shelf Depth 35.6 cm./14 in.

Maximum Weight

Compliance

Approvals

Office Supply

Cabinets require

flammable labels

to comply with NFPA Code 30.

NOTE:

Office Supply Cabinets:

 Provide secure, fire-resistant storage of software, financial records, supplies, toner, adhesives, etc.

134.3 kg./296 lbs.

- · Have four painted shelves
- · Are not fireproof

Compliance solution combos for the handling & storage of flammable liquids

with Eagle's market-leading 5-gallon (18.9 L) Type I Safety Cans with funnels! Now, one easy purchase can meet your compliance needs.



Capacity (Gal.)	113.6 L / 30 gal.	170.4 L / 45 gal.	227.2 L / 60 gal.		
Common Name	30-Gallon Standard	45-Gallon Standard	60-Gallon Standard		
Model Numbers Door Manual Close: Styles Self Close:	(Includes 6 UI50FS Cans) 1932XSC6 3010XSC6 ▲	(Includes 9 UI50FS Cans) 1947XSC9 4510XSC9 ▲	(Includes 12 UI50FS Cans) 1962XSC12 6010XSC12 ▲		
Outside w. Dimensions D:	cm. in. 109.2 43 45.7 18 111.8 44	cm. in. 109.2 43 45.7 18 165.1 65	cm. in. 86.4 34 86.4 34 165.1 65		
Inside w. Dimensions D. H:	cm. in. 100.3 39½ 37 14.6 100.3 39½	cm. in. 100.3 39½ 37 14.6 153.7 60½	cm. in. 78.1 30% 77.1 30.3 153.7 60½		
No. of Shelves Extra Shelf Model No.	1 29937	2 29937	2 29944		
Shelf Depth	35.6 cm./14 in.	35.6 cm./14 in.	73.7 cm./29 in.		
Maximum Weight	122 kg./269 lbs.	166 kg./366 lbs.	212.7 kg./469 lbs.		
Compliance	OSHA	OSHA	SHA OSHA		

CABINET ACCESSORIES

PLEASE CALL EAGLE CUSTOMER SERVICE AT 304.737.3171

3045XKIT Polyethylene Tray Kit 38.5 in. (97.8 cm.) x 14.25 in. (36.2 cm.) x 1.2 in. (3.1 cm.)



39-3/8 in. (100 cm.) x 14 in. (35.6 cm.) x 1-7/16 in. (3.7 cm.) 24.5 in. (62.2 cm.) x 28 in. (71.1 cm.)



25932 Vertical Drum Cabinet Ramp



84001 Cabinet Dolly Cart



08800 Drum Craddle



08500/08501 Bonding Wires (3 ft./91.5 cm.) **1794** Poly Drum Cabinet Ramp

08300 Brass Horizontal Drum Vent **1974B** Brass Faucet (3/4 in./1.90 cm.)



29985 Shelf Dividers **08800** Horizontal Drum Cradle



25922 Roller Conveyors

Cabinet Accessories, Shelves & Parts For use only on new X model cabinets.


. 0. 400	only on how it model capillots.	
08800	Cradle for Horizontal Drum Cabinets	
25920	2 in. Roller Conveyor HAZ1926X & HAZ2610X	⚠
25922	2 in. Roller Conveyor HAZ1955X & HAZ5510X	
25923	2 in. Roller Conveyor HAZ1992X & HAZ9010X	
25998	Key Set (2 keys) (Key #CH545)	
29050	Poly Shelf/Bottom Tray for 2- & 4-gallon cabinets	
29051	Poly Shelf/Bottom Tray for 12-, 16- & 24-gallon cabinets	
29052	Poly Shelf/Bottom Tray for CRA70X & CRA71X	
29053	Poly Shelf/Bottom Tray for 15-, 30- & 45-gallon cabinets	
29054	Poly Shelf/Bottom Tray for 60-gallon cabinets	
29157	Paddle Latch Door Lock with Keys (flush mount)	
29935	Metal Shelf for 2- and 4-gallon cabinets, including CRA models	
29936	Metal Shelf for 12-, 16- & 24-gallon cabinets, including CRA models	
29937	Metal Shelf for 15-, 30- & 45-gallon cabinets	
29938	Metal Shelf for Wall Mount/Aerosol Can Cabinets	
29939	Metal Shelf for Under Counter Cabinets, including CRA models	
29941	Metal Shelf for 48-gallon cabinets	
29944	Metal Shelf for 60-gallon cabinets, including CRA cabinets	
29945	Metal Shelf for 60-gallon work bench, and 90-gallon cabinets	
29946	Metal Half-Depth Shelf for HAZ1926X & HAZ2610X	
29947	Metal Half-Depth Shelf for HAZ1955X	
29985	2 in. Divider for cabinets with 14 in. (D) shelves	
29988	Fusible Link for all self-closing cabinet models	⚠
29990	2 in. Divider for cabinets with 18 in. (D) shelves	
3045XKIT	Universal Poly Tray Kit 3 trays	
Ган	on analytical arisinal and navy V model ashina	

For use on specified original and new X model cabinets.

1794	Poly Ramp for use with Vertical Drum Cabinets	
1933	Cabinet Wheel Kit for 30-gallon or less	
8300	Brass Horizontal Drum Vent	
8500	Grounding Wire w/Alligator Clips 36 in. length	
8501	Bonding Wire w/C Clip 36 in. length	
25932	Vertical Drum Cabinet Ramp	
84000	Cabinet Earthquake Kit all cabinets	
84001	Cabinet Dolly Cart for 15- & 30-gallon cabinets	
1974B	Brass Faucet	<u> </u>



1933 Cabinet Wheel Kit (Fits 30 gal./113.6 L and smaller)



84000 Cabinet Earthquake Kit

(FM)

⟨FM⟩

FM

Approvals







SAFETY CANS


For nearly 60 years, our Safety Can product line has been an industry leader of galvanized Type I and Type II Safety Cans that meet OSHA and NFPA Code 30 requirements, and are UL and ULC listed and FM Approved for safe storage and handling of flammable liquids. Eagle offers FM Approved Compliance Solutions in a variety of poly and stainless cans lab cans, faucet cans, disposal cans, plunger, bench & daub cans, and poly oily waste cans to help keep your personnel and facilities protected. Made in the USA.

Safety Can options:

- Type I Safety CansType II Safety Cans
- Type I Poly Cans
- Lab Cans
- Faucet Cans - DOT Cans - Disposal Car
- · Plunger Can
- Daub Cans
 Daub Cans
 Cans
 Poly Oily W
 Cans
 Biohazardo




Patented comfort grip trigger release plus spring closing lid with nitrile gasket that vents at 5-PSI internal pressure



Double interlock no-weld bottom seam is the only deep drawn seamless can made









eagle-mfg.com 19

18 sales@eagle-mfg.com





TYPE I SAFETY CANS FLAMMABLES Model Numbers UI4S 🔥 UI10S \Lambda **UI20S** 🔥 **UI50S** 🔥 Model-w/Funnel UI4FS 🗥 UI10FS \Lambda UI20FS \Lambda UI25FS^{*} ⚠ UI50FS \Lambda Capacity 2 qt./2 L 1 gal./3.8 L 2 gal./7.6 L 2½ gal./9.5 L 5 gal./18.9 L 111/:- /00.0 9 in./22.9 cm. 9 in./22.9 cm. Dimensions 55/16 in./13.5 cm. 8 in./20.4 cm. Weight 2.25 lbs./1.1 kg. 3.52 lbs./1.6 kg. Construction **Galvanized** Galvanized TYPE I SA

11¼ in./28.6 cm. 9½ in./24.2 cm.	11¼ in./28.6 cm. 10 in./25.4 cm.	12½ in./31.8 cm. 13½ in./34.3 cm.
5.25 lbs./2.4 kg.	5.7 lbs./2.6 kg.	7 lbs./3.2 kg.
Galvanized	Galvanized	Galvanized
TY CANS		
SAFE OF SAFE	SAFE	
UI20SY 🛕	UI25SY* <u> </u>	UI50SY 🛦
UI20FSY 🛕	UI25FSY* <u>∧</u>	UI50FSY 🔥
2 nal /7 6 l	21/ gal /9.5.1	5 gal /18 9 l

	O wil	0.5	e ul	9
UI4SY 🛕	UI10SY 🗘	UI20SY 🛕	UI25SY* <u> </u>	UI50SY 🗘
UI4FSY 🔥	UI10FSY 🔥	UI20FSY 🛕	UI25FSY* <u></u> ▲	UI50FSY 🗘
2 qt./2 L	1 gal./3.8 L	2 gal./7.6 L	2½ gal./9.5 L	5 gal./18.9 L
9 in./22.9 cm. 5‰ in./13.5 cm.	9 in./22.9 cm. 8 in./20.4 cm.	11¼ in./28.6 cm. 9½ in./24.2 cm.	11¼ in./28.6 cm. 10 in./25.4 cm.	12½ in./31.8 cm. 13½ in./34.3 cm.
2.25 lbs./1.1 kg.	3.52 lbs./1.6 kg.	5.25 lbs./2.4 kg.	5.7 lbs./2.6 kg.	7 lbs./3.2 kg.
Galvanized	Galvanized	Galvanized	Galvanized	Galvanized

Type I Safety Cans

DIESEL

Model Numbers

Model-w/Funnel

Capacity

Weight

Dimensions

Construction

- Eagle Type 1 Safety Cans are constructed of 24-gauge hot dipped galvanized steel, whereas other manufacturers' safety cans use lead-coated terne steel
- These safety cans are accepted under CARB, meet OSHA and NFPA Code 30 requirements, and are UL, ULC and FM Approved for safe handling and storage of gasoline and other flammable liquids
- Available in a variety of colors for the safe handling and storage of kerosene (blue), diesel (yellow) and combustible liquids such as oils (green)
- Meets the New York City Fire Code Title 29 FC 2204.4.4.1.1 Maximum 2.5 gallon (9.5 L) container regulations

Compliance: OSHA 29 CFR 1910.106, 1926.152 and NFPA Code 30

















Model Numbers Model-w/Funnel Capacity

Dimensions Weight

Construction



Model Numbers Model-w/Funnel Capacity

Dimensions

Weight Construction



UI4SB 🔨

UI4FSB 🗘

2 qt./2 L

9 in./22.9 cm.

51/4 in./13.5 cm.

2.25 lbs./1.1 kg.

Galvanized

UI4SG 🔨

UI4FSG

2 qt./2 L

9 in./22.9 cm.

5% in./13.5 cm.

2.25 lbs./1.1 kg.

Galvanized





9 in./22.9 cm.

8 in./20.4 cm.

3.52 lbs./1.6 kg.

Galvanized

1 gal./3.8 L

9 in./22.9 cm.

8 in./20.4 cm.

3.52 lbs./1.6 kg.

Galvanized

TYPE I SAFETY CANS

TYPE I SAFETY CANS



Galvanized



10 in./25.4 cm. 13½ in./34.3 cm. 5.7 lbs./2.6 kg. 7 lbs./3.2 kg. Galvanized Galvanized



UI25SG* ▲ UI10SG \Lambda UI20SG \Lambda UI10FSG \Lambda UI20FSG \Lambda UI25FSG* 🔥

2 gal./7.6 L

11¼ in./28.6 cm.

9½ in./24.2 cm.

5.25 lbs./2.4 kg.

Galvanized

UI50FSG \Lambda 2½ gal./9.5 L 5 gal./18.9 L 11¼ in./28.6 cm. 12½ in./31.8 cm. 13½ in./34.3 cm. 10 in./25.4 cm. 5.7 lbs./2.6 kg. 7 lbs./3.2 kg.

TYPE I POLY CANS







14169

Poly



14545 🗘



14261

Poly



14561

Poly





14540 🗘

Poly

Galvanized



Stainless




UI50SG 🔥

Galvanized

au.	
Capacity	
Dimensions	Diamete Heigh
Weight	

Construction

1 gal./4 L	5 gal./19 L
7¼ in./184 mm. 1½ in./292 mm.	11½ in./292 mr 17 in./432 mm
3 lbs./1 kg.	10 lbs./4 kg.



Poly





14535 🗘

Poly



11¼ in./28.6 cm. 11¼ in./28.6 cm. 9% in./24.5 cm. 15% in./39.7 cm. 8 lbs./3.7 kg. 10 lbs./4.6 kg.

Stainless

Mode Mode Capac

Dimer


Weig Consti





				TYPE II SA	FETY CANS					STAINLESS		POLY		
A (A)	FLAMMABLES		KERO	KEROSENE		DIESEL		STIBLES	⊘ Justrite	1.625" mouth	Ode		O-	
FM														
del 7/8" Spout	U226S <u>∧</u>	U251S <u>∧</u>	U226SB <u>▲</u>	U251SB <u>∧</u>	U226SY <u></u>	U251SY 🔥	U226SG <u></u> ▲	U251SG <u></u> ▲	Model Numbers	1301	12162	14065	14160	
del 5/8" Spout	U226SX5 <u>∧</u>	U251SX5 <u></u> ▲	U226SX5B <u>∧</u>	U251SX5B <u></u> ▲	U226SX5Y <u></u>	U251SX5Y <u>∧</u>	U226SX5G <u>∧</u>	U251SX5G <u></u> ▲	Approvals	FM	FM	FM	FM	
acity	2½ gal./9.5 L	5 gal./19 L	Capacity	1 gal./3.8 L	1 gal./4 L	½ gal./2 L	1 gal./4 L							
	11¼ in./28.6 cm. 9½ in./24.2 cm.	12½ in./31.8 cm. 15½ in./40.4 cm.	11¼ in./28.6 cm. 9½ in./24.2 cm.	12½ in./31.8 cm. 15% in./40.4 cm.	11¼ in./28.6 cm. 9½ in./24.2 cm.	12½ in./31.8 cm. 15½ in./40.4 cm.	11¼ in./28.6 cm. 9½ in./24.2 cm.	12½ in./31.8 cm. 15½ in./40.4 cm.	Dimensions Width Depth Height	4¼ in./10.8 cm. 8 in./20.4 cm. 13 in./33.1 cm.	4% in./117 mm. 7% in./194 mm. 12% in./324 mm.	4½ in./117 mm. 7½ in./194 mm. 9½ in./241 mm.	4½ in./117 mn 7½ in./194 mn 12½ in./324 mr	
ight	8 lbs./3.7 kg.	10 lbs./4.6 kg.	Weight	3.75 lbs./1.7 kg.	2 lbs./1 kg.	2 lbs./1 kg.	2 lbs./1 kg.							
struction	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized	Galvanized	Construction	Stainless	Poly	Poly	Poly	
-						_		_		EALICET CANS		DOT CANS		

PAGLE SAL				
Model 7/8" Spout	U211S 🔥	U211SB <u>▲</u>	U211SY <u>▲</u>	U211SG 🛕
Model 5/8" Spout	U211SX5 <u></u> ▲	U211SX5B <u></u> ▲	U211SX5Y <u> </u>	U211SX5G <u>▲</u>
Capacity	1 gal./3.8 L	1 gal./3.8 L	1 gal./3.8 L	1 gal./3.8 L
Dimensions Diameter Height	11¼ in./28.6 cm. 7¼ in./18.4 cm.	11¼ in./28.6 cm. 7¼ in./18.4 cm.	11¼ in./28.6 cm. 7¼ in./18.4 cm.	11¼ in./28.6 cm. 7¼ in./18.4 cm.
Weight	7 lbs./3.2 kg.	7 lbs./3.2 kg.	7 lbs./3.2 kg.	7 lbs./3.2 kg.
Construction	Galvanized	Galvanized	Galvanized	Galvanized
			THE RESERVE THE PARTY OF THE PA	



 Flame arrestors in filler opening and pour spout Compliance: OSHA 29 CFR 1910.106, 1926.152 and NFPA Code 30











• Metal Safety Cans are FM, UL and ULC Approved and meet OSHA and NFPA Code 30 requirements. Poly Cans are FM Approved.



K	







1215 🗘

5 gal./19 L



1215SX5 🔥

5 gal./19 L

12½ in./31.8 cm.

15¾ in./40 cm.

DOT Transport Type II Safety Cans:

- Reduce the danger of explosion while dispensing flammable liquids through a flexible metal spout
- · Have double-walled flame arrestors in filler opening and pour spout
- · Heavy duty roll bars protect both spouts, and a thumb screw mechanism assures the filler opening stays closed while being transported
- Meet DOT requirements Compliance: OSHA 29 CFR 1910.106, 1925.152 & NFPA Code 30 - UN/DOT-1A1/Y1.2/100/08/USA/M4990/0.6mm



Model Numbers

Approvals

Capacity

Weight

Dimensions


Construction

• Laboratory Safety Cans reduce the danger of explosions resulting from the ignition of vapors of flammable liquids

Galvanized

 Cans are available in coated metal, stainless steel and high-density polyethylene for safe storage and handling of most chemical compounds

Compliance: OSHA 29 CFR 1910.106, 1925.152 & NFPA Code 30



1215YSX5 🗘

5 gal./19 L

12½ in./31.8 cm.

15¾ in./40 cm.

13 lbs./5.9 kg

Galvanized

1215Y 🔥

5 gal./19 L

12½ in./31.8 cm.

15¾ in./40 cm.





			DISPOSAL CA	ANS						PLUNGE	R CANS		
& Justrita.									METAL			POLY	
Model Numbers	14762	14765	12751	12754	14565	12772	Model Numbers	P701 <u>∧</u>	P702 <u>↑</u>	P704 <u>∧</u>	P711 <u>∧</u>	P712 <u>∧</u>	P714 ▲
Approvals	FM	FM	FM	FM	FM	FM	Approvals	FM	FM	FM	FM	FM	FM
Capacity	2 gal./7.5 L	5 gal./19 L	2 gal./7.5 L	5 gal./19 L	5 gal./19 L	5 gal./19 L	Capacity	1 qt./1 L	2 qt./1.9 L	4 qt./3.8 L	1 qt./1 L	2 qt./1.9 L	4 qt./3.8 L
Dimensions Diameter Height	12 in./305 mm. 14¾ in./375 mm.	12 in./305 mm. 20 in./508 mm.	12 in./305 mm. 14¾ in./375 mm.	12 in./305 mm. 20 in./508 mm.	12 in./305 mm. 20 in./508 mm.	12 in./305 mm. 20 in./508 mm.	Dimensions Diameter Height	6¼ in./15.9 cm. 8 in./20.4 cm.	8 in./20.4 cm. 8½ in./21.6 cm.	8 in./20.4 cm. 10¾ in./27.3 cm.	5¼ in./13.4 cm. 9¼ in./24.8 cm.	6½ in./16.6 cm. 11 in./28 cm.	7¾ in./19.7 cm. 13 in./33 cm.
Weight	7 lbs./3 kg.	11 lbs./5 kg.	7 lbs./3 kg.	11 lbs./5 kg.	11 lbs./5 kg.	12 lbs./6 kg.	Weight	2.34 lbs./1.1 kg.	3 lbs./1.4 kg.	3.67 lbs./1.7 kg.	2 lbs./0.9 kg.	3 lbs./1.4 kg.	4 lbs./1.9 kg.
Construction	Poly	Poly	Poly	Poly	Poly	Poly	Construction	Galvanized	Galvanized	Galvanized	Poly	Poly	Poly
		DISPOSAL	CANS		SPECI	AL CANS				BENCH 8	DAUB CANS		



Approvals

Dimensions

Construction

Capacity

Weight



1423 🗥

⟨FM⟩

2½ gal./9.5 L

11¼ in./28.6 cm.

12 in./30.5 cm.

8 lbs./3.7 kg.

Galvanized





1425 🗘

⟨FM⟩

5 gal./19 L

11¼ in./28.6 cm. 18 in./45.8 cm.

10 lbs./4.6 kg

Galvanized



⟨FM⟩

2½ gal./9.5 L

11¼ in./28.6 cm. 12 in./30.5 cm.

8 lbs./3.7 kg.

Stainless



1325 🗘

⟨FM⟩

5 gal./19 L

111/4 in./28.6 cm.

18 in./45.8 cm.

10 lbs./4.6 kg.

Stainless



Tallow Pot

4 pt./3.4 L

5¼ in./13.3 cm. 7½ in./19 cm.

2 lbs./.9 kg.

Coated Metal





Construction





4¼ in./10.8 cm.

3 lbs./1.4 kg.

Galvanized



6½ in./16.6 cm.

3.5 lbs./1.6 kg.

Galvanized





Optional cleanir is available fo	ng basket shown or both models			
B602	B604	B606	B606NL	B608
FM	FM	FM	FM	FM
2 qt./1.9 L	4 qt./3.8 L	6 qt./5.7 L	6 qt./5.7 L	8 qt./7.6 L
8 in./20.4 cm.	8 in./20.4 cm.	7¾ in./19.7 cm.	7¾ in./19.7 cm.	11¼ in./28.6 c

7 in./17.8 cm. 9½ in./24.2 cm. 9½ in./24.2 cm. 3.67 lbs./1.7 kg. 3.67 lbs./1.7 kg. 8.25 lbs./3.8 kg. Galvanized Galvanized Galvanized

Metal & Polyethelene Disposal Safety Cans:

- Disposal Safety Cans provide an intermediate station for temporary storage of liquid wastes
- Spout cap opens to a wide 80° angle and can be locked open for conveniently emptying various types of containers
- Cans are equipped with a flame arrestor
- · Cap assembly opens automatically to relieve excessive internal vapor pressures
- FM Approved



Plunger & Bench Safety Cans:

B600D

⟨FM⟩

½ pt./0.2 L

Galvanized

• Eagle Safety Plunger Cans are ideal for cleaning with flammable or volatile fluids

B601

⟨FM⟩

1 qt./1 L

6¼ in./15.9 cm.

3% in./9.2 cm.

2.17 lbs./1 kg.

Galvanized

- Feature flame arrestor dasher screens, brass pump assemblies, and comply with OSHA standards
- When the dasher plate is pushed down, the safety can dispenses a small amount of liquid to easily moisten sponges or rags without messy or dangerous spills
- Polyethylene and coated metal models available

- FM Approved
- · Eagle Safety Bench Cans are designed for safer cleaning of small parts or swabbing of larger ones
- Dasher screens act as a fire baffle






POLY WASTE CANS



BIOHAZARDOUS POLY WASTE CANS



Model Numb	ers	
Approvals		
Capacity		
Dimensions	Width Depth	





⟨FM⟩

6 gal./22.8 L

16½ in./42 cm.

13½ in./34.3 cm.

16 in./40.7 cm.

9 lbs./4.1 kg



935FLBK

⟨FM⟩

10 gal./37.9 L

22 in./55.9 cm.

18 in./45.8 cm.

18 in./45.8 cm.

14 lbs./6.4 kg.

POLY WASTE CANS







9 lbs./4.1 kg.





<u>\$</u>	

16 lbs./7.3 kg.

937FLBK	943BIO	945BIO	947BIO
FM	FM	FM	FM
14 gal./53 L	6 gal./22.8 L	10 gal./37.9 L	14 gal./53 L
22 in./55.9 cm. 18 in./45.8 cm. 21 in./53.4 cm.	16½ in./42 cm. 13½ in./34.3 cm. 16 in./40.7 cm.	22 in./55.9 cm. 18 in./45.8 cm. 18 in./45.8 cm.	22 in./55.9 cm. 18 in./45.8 cm. 21 in./53.4 cm.

14 lbs./6.4 kg.

Polyethylene Oily Waste Cans:

 Fire-safe temporary storage of solvent rags, waste rags, shavings and other materials

Compliance: OSHA 29 CFR 1910.125(e)(4)(ii) and OSHA 29 CFR 1910.125(e)(4)(iii)

Polyethylene Biohazardous Waste Cans:

 Advise workers of potential biohazards and meet OSHA requirements for exposures to blood borne pathogens

Compliance: OSHA 29 CFR 1910.1030

Can be used with or without a liner

16 lbs./7.3 kg.

Fire-safe temporary storage of solvent rags, waste rags, shavings and other materials subject to spontaneous combustion

Polyethylene construction won't rust or dent and is resistant to most chemical compounds - heavy-wall HDPE construction

> Meets OSHA and NFPA Code 30 requirements and are accepted for temporary storage of oily waste

> > Flared base for added stability



Self-closing lid

Molded handles for easy handling

No seam leakproof construction

Exceeds FM standards for impact, stability & fire testing

Exceeds performance standards at temperatures between -40° F (4.4° C) & 140° F (54 4° C)

Hands-free foot lever

SAFESMOKER™ & Butt Cans

SAFESMOKER™ Cigarette Receptacle

is made of high-density polyethylene with UV inhibitors, with a galvanized steel collection bucket inside. Design restricts oxygen to quickly extinguish burning butts. Top of container removes easily to access and empty internal bucket. Rain-protective design keeps water out and eliminates odor. Includes integrated hold-down tabs for security and wind protection.

Eagle Butt Cans are ideal for "designated smoking areas" inside or outside. Features poly tube and galvanized can base. Yellow for in-plant use and beige for office or commercial areas.

Original Butt Cans

This all-metal galvanized steel can is excellent for smoking areas in industrial settings. 5-gallon (18.9 L) capacity in yellow or beige.

7 lbs./3.2 kg.

7 lbs./3.2 kg.

7 lbs./3.2 kg.

1202BLK 5 lbs./2.3 kg.

1205BLK 7 lbs./3.2 kg

2 gal./7.58 L



1206BLACK 5 qt./4.7 L in: 151/4 x 373/4 cm: 38.8 x 95.9

SHIPPING SIZES:

1200 in: 13 x 13 x 20 cm: 33.1 x 33.1 x 50.8

1202 in: 13 x 13 x 28

1206 in: 16 x 16 x 21

All cans are FM Approved.

1208 in: 17½ x 17½ x 25 cm: 44.5 x 44.5 x 63.5

1205 in: 13 x 13 x 28 cm: 33.1 x 33.1 x 71.2

LxWxH

cm: 33.1 x 33.1 x 71.2

cm: 40.7 x 40.7 x 53.4


1208BLACK 4 gal./15.2 L in: 17¼ x 43¼ cm: 43.8 x 109.9


1213BLACK 2 gal./7.58 L in: 12½ x 37 cm: 31.8 x 94

Container top removes easily to empty internal galvánized steel bucket







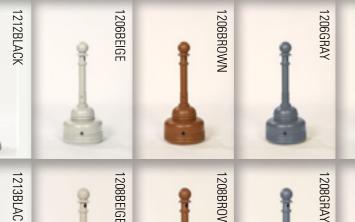

SafeSmoker™-Beige in: 17¼ x 43¼ cm: 43.8 x 109.9 4 gal./15.2 L 10 lbs./4.5 kg.

SafeSmoker[™]-Gray in: 17¼ x 43¼ cm: 43.8 x 109.9 4 gal./15.2 L 10 lbs./4.5 kg

SafeSmoker[™]-Black in: 17¼ x 43¼ cm: 43.8 x 109.9 4 gal./15.2 L 10 lbs./4.5 kg.

1200YFLL0W

in: 121/2 x 37

in: 121/2 x 441/2 cm: 31.8 x 111.8

1202BEI

1200BFIGE

1208BROWN SafeSmoker™-Brown in: 171/4 x 431/4 cm: 43.8 x 109.9 4 gal./15.2 L 10 lbs./4.5 kg.

SafeSmoker[™]-Beige in: 15¼ x 37¾ cm: 38.8 x 95.9 5 qt./4.7 L

SafeSmoker™-Brown in: 15¼ x 37¾ cm: 38.8 x 95.9 5 qt./4.7 L

SafeSmoker[™]-Gray in: 15¼ x 37¾ cm: 38.8 x 95.9 5 gt./4.7 L

SafeSmoker[™]-Black in: 15¼ x 37¾ cm: 38.8 x 95.9 5 gt./4.7 L



2 gal./7.58 L in: 11 x 35 cm: 27.9 x 88.9

in: 12 x 40 cm: 30.5 x 101.6

in: 12 x 33 cm: 30.5 x 83.8

SafeSmoker™-Hitching Post

5 gal./18.9 L

5 gal./18.9 L

1213BLACK









1205BLACK







eagle-mfg.com 27 **26** sales@eagle-mfg.com







Since the 1980s, Eagle Manufacturing has had the most flexible and comprehensive spill containment and storage product line available. As the market leader, we have trusted Compliance Solutions to help keep your personnel and facilities protected. All of our products are 100 percent made in the USA, and are constructed of high-density polyethylene (HDPE) for excellent chemical resistance and maximum performance to meet EPA and SPCC compliance. This product line includes Budget Basins, Modular Platforms, Pallets, Sumps, IBC Containment Units, Outdoor Storage, Workstations and Spill Containment Boxes.

Eagle offers 3 Spill Containment options: Rigid, Flexible and Steel



Modular Platform easy to connect with a built-in U-channel



Poly Pallet Ramp for easier loading and unloading All Eagle Basins, Pallets and Platforms feature high-performance engineered plastic construction for excellent chemical resistance and impact durability for long life. Pallets and Platforms are also UV Protected.

Removable grating for easy cleaning

Forklift pockets

Removable flat top grating

Modular platforms easy to connect with built-in U-channel

Most models available with and without drain





1636

1 Drum Budget Basin

26¼ in./66.7 cm. 26¼ in./66.7 cm.

6½ in./16.6 cm.

17.5 gal./66.3 L

Optional

12 lbs./5.5 kg.

5,000 lbs./2,268 kg.

No

No









Compliance





1631

•
· m
_

_	1038
-	_
-	_
2 Drum Budget Basin	4 Drum Budget Basin
26½ in./66.7 cm. 51½ in./130.9 cm. 6½ in./16.6 cm.	51½ in./130.9 cm. 51½ in./130.9 cm. 8 in./20.4 cm.
34 gal./128.7 L Optional	66 gal./249.9 L Optional
20 lbs./9.1 kg.	25 lbs./11.4 kg.
5,000 lbs./2,268 kg.	5,000 lbs./2,268 kg.
No	No



-	
1638	
-	
-	
4 Drum Budget Basin	
51½ in./130.9 cm. 51½ in./130.9 cm. 8 in./20.4 cm.	
66 gal./249.9 L Optional	

No



Yellow No Drain

Black No Drain

Yellow Drain

Black Drain



1620ND	
1620	
1620BND	
1620B	
2 Drum Pallet	4





1640BND

1640ND	
1640	1



in	1620B	1645B	1640B	_
lame	2 Drum Pallet	4 Drum Pallet	4 Drum Pallet	4 Drum Nestable Pallet
Width S Depth Height	51 in./129.6 cm. 26¼ in./66.7 cm. 13¼ in./35 cm.	51½ in./130.9 cm. 51½ in./130.9 cm. 8 in./20.4 cm.	52½ in./133.4 cm. 51 in./129.6 cm. 13¾ in./35 cm.	58½ in./148.6 cm. 58½ in./148.6 cm. 7¾ in./19.7 cm.
acity	66 gal./249.9 L	66 gal./249.9 L	132 gal./499.7 L	66 gal./249.9 L
	52 lbs./23.6 kg.	67 lbs./30.4 kg.	104 lbs./47.2 kg.	72 lbs./32.7 kg.
city ad (UDL)	4,000 lbs./1,814 kg.	8,000 lbs./3,628.8 kg.	8,000 lbs./3,628.8 kg.	6,000 lbs./2,721.6 kg.

⊕EPA





Yes

Yes





Yes

No

Yes

Yes

Eagle Tarps are designed to fit Eagle's Spill Containment Products. Tarps help prevent contamination of drums and sump area, permit easy visual inspection, and keep rainwater and debris out when stored outdoors.

Yes

No

- Elasticized bottom with adjustable straps
- Attached document pouch for holding chemical information, MSDS sheets and other documents

Model No.	Description	Color	Weight	Dimensions		
T8603 Tarp Cover for 2 Drum		Yellow	5 lbs. 2.3 kg.	in: 60L x 39.25W x 43.31H cm: 152.4L x 99.7W x 106.7H		
T8604	Tarp Cover for 4 Drum	Yellow	7 lbs. 3.2 kg.	in: 56.5L x 56.5W x 44H cm: 143.6L x 143.6W x 111.8H		
T8605	Tarp Cover for Single IBC Containment Unit	Yellow	11 lbs. 5 kg.	in: 80L x 76W x 73.75H cm: 203.2L x 193.1W x 187.4H		
T8609	Tarp Cover for Drum Dollie	Yellow	4 lbs. 1.9 kg.	in: 71L x 34W x 26H cm: 180.4L x 86.4W x 66.1H		



ADD LOW COST SPILL PROTECTION TO YOUR WORKPLACE

No


Designed for Eagle spill containment platforms and pallets that have built-in drain plugs. The 16DRAIN connects into the 3/4 in. (1.905 cm.) port in the side of the tub to allow liquid in the tub to drain through the assembly. The assembly includes a replaceable absorbent sock (Model 16FILTER) to collect oil allowing only water to discharge at the other end of the drain assembly for proper disposal. The assembly also has a plastic mesh screen inside to collect debris. When the absorbent sock in the assembly is fully saturated the liquid flow stops. The threaded drain assembly allows for easy removal and replacement of the absorbent sock. (Replacement sock kit sold separately Model 16FILTER)





MODULAR SPILL PLATFORMS MODULAR SPILL PLATFORMS 1633 1632 16323 1635 1647 1686 1688 1632D 1635D 1647D 1688D 1633D 1686D 1632B 1688B 1633B 1635B 1647B 1686B 1633BD 1632BD 1647BD 1688BD 1635BD 1686BD 1 Drum Modular Platform 2 Drum Modular Platform 3 Drum Modular Platform 4 Drum Modular Platform 4 Drum In-Line Platform 6 Drum Platform 8 Drum Platform 26¼ in./66.7 cm. 26 in./66.1 cm. 26¼ in./66.7 cm. 77½ in./196.9 cm. 51½ in./130.9 cm. 51½ in./130.9 cm. 78¼ in./198.8 cm. 51½ in./130.9 cm. 261/4 in./66.7 cm. 103½ in./262.9 cm. 103 in./261.7 cm. 51½ in./130.9 cm. 26¼ in./66.7 cm. 51½ in./130.9 cm. 6½ in./16.6 cm. 15 gal./56.8 L 30 gal./113.6 L 45 gal./170.3 L 60.5 gal./229.1 L 60.5 gal./229.1 L 88 gal./333.2 L 121 gal./458.1 L (60.5 per side) 16 lbs./7.3 kg. 32 lbs./14.6 kg. 48 lbs./21.6 kg. 65 lbs./29.5 kg. 64 lbs./29.1 kg. 85 lbs./38.6 kg. 112 lbs./50.8 kg. 2,000 lbs./907.2 kg. 5,000 lbs./2,268 kg. 5,000 lbs./2,268 kg. 10,000 lbs./4,536 kg 10,000 lbs./4,536 kg. 10,000 lbs./4,536 kg. 10,000 lbs./4,536 kg. No Yes Yes Yes Yes Yes Yes **⊕EPA \$EPA ⊕**SPCC **SEPA**

Yes

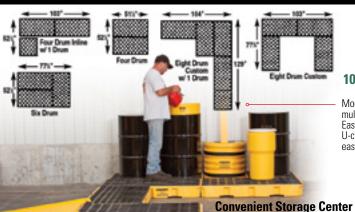

No



100% Recyclable

Modular design allows for multiple configurations. Easy to connect with built-in U-channel. Low profile for easy loading and unloading.

All Eagle Pallets & Platforms feature:

High-performance engineered plastic construction for excellent chemical resistance and impact durability for long life.



EPA 40 CFR 264.175: Container storage areas must have a containment system that has sufficient capacity to contain 10 percent of the volume of containers or the volume of the largest container, whichever is greater.



Yes

This marker indicates compliance with EPA spill prevention, control and countermeasures regulations.

Yes

Did you know?

According to SPCC regulations, containment systems are required by any industry that deals with the storing and transportation of hazardous materials.

Yes

Poly Pallet Ramps Model 1689B Poly Ramp in: 451/₂L x 32W x 8H <u>ر 2</u> ح cm: 115.6L x 81.3W x 20.3H Weight: 32 lbs. (14.6 kg.) HDPE 100% Recyclable

Yes



Yes





		METAL SPILL PALLETS		HORIZONTAL DRUM STACKING SYSTEMS				
No Drain	1611ST	1620ST	1640ST	1605	1606	1607	1608	
Drain	_	-	-	-	_	-	-	
Common Name	1 Drum Steel Pallet	2 Drum Steel Pallet	4 Drum Steel Pallet	Cradle	Single Stacker	Double Stacker	Shelf	
Dimensions Width Depth Height	25¾ in./65.4 cm. 27 in./68.6 cm. 6 in./15.3 cm.	51¼ in./130.2 cm. 27 in./68.6 cm. 13 in./58.5 cm.	54¼ in./137.8 cm. 54 in./137.2 cm. 12 in./30.5 cm.	29 in./73.7 cm. 26¼ in./66.7 cm. 22½ in./57.2 cm.	27 in./68.6 cm. 26¼ in./66.7 cm. 29 in./73.7 cm.	48 in./122 cm. 26½ in./67.4 cm. 13 in./33.1cm.	19 in./48.3 cm. 23 in./106.7 cm. 19 in./48.3 cm.	
Sump Capacity	17 gal./64.4 L	74 gal./280.2 L	92 gal./348.3 L	_	-	-	-	
Weight	60 lbs./27.3 kg.	130 lbs./59 kg.	200 lbs./90.8 kg.	30 lbs./13.6 kg.	30 lbs./13.6 kg.	30 lbs./13.6 kg.	15 lbs./6.8 kg.	
Load Capacity Uniform Distributed Load (UDL)	1,000 lbs./453.6 kg.	2,000 lbs./907.2 kg. (1,000 lbs./453.6 kg. per grate panel)	4,000 lbs./1,814.4 kg. (1,000 lbs./453.6 kg. per grate panel)	2,000 lbs./907.2 kg.	1,000 lbs./453.6 kg.	2,000 lbs./907.2 kg.	100 lbs./45.4 kg.	
Fork Pockets	Yes	Yes	Yes	_	_	Yes	-	
Compliance		⇔EPA SPCC COMPLIANT	⇔EPA ⊕ SPCC	⇔EPA	⇔EPA	EPA SPCC	○EPA	
		Tetal Spill Pallet Features: Constructed of 12 Gauge Cold Rolled Steel	Model 1611STG Grating Panel 25 in. x 26.5 in.	Horizontal Stacking Systems Model	Model 1608	Model 1607 Double Stacker Horizonta	l Drum Stacking	



Metal Spill Pallet Features:

- Constructed of 12 Gauge Cold Rolled Steel
- Fully welded and leak tested
- Blue baked-on powder coat finish
- Fork-lift pockets in the front and back
- Heavy duty and durable
- For drum storage
- Grating has 1/2 in. (1.3 cm.) drain holes
- Grating is constructed of galvanized steel
- Grating removes for easy cleaning
- Load Capacity: 1,000 lbs. (453.6 kg.) (UDL) per grate

63.5 cm. x 67.3 cm.

Model 1608 \ Shelf Model 1605 \ Cradle Model 1632 2 Drum Modular Platform (See pg. 33)

Model 1645 Model 1605 (2) 4 Drum Pallet Platform (See pg. 31)

Horizontal Drum Stacking System Drum Containment

Used in combination with our spill containment platforms, this product meets EPA Secondary Containment Storage requirements (40 CFR 264.175).

designed to lock into spill pallet grating for stable drum storage and are ideal for chemical storage and dispensing. Shelf attaches easily, allows for filling multiple containers at once and can be moved via forklift.





1684

1684D

(Tank not included)

118 in./299.8 cm.

77½ in./196.9 cm

20 in./50.8 cm.

400 gal./1,514.2 L

538 lbs./244 kg.

OUTDOOR DR	RUM STORAGE	WORKS	TATIONS	IBC COI	NTAINMENT UNITS
No.				NE	16















1683STC

Poly Platform

(Tank not included)

84.4 in./214.4 cm.

67.3 in./170.9 cm.

91.9 in./233.4 cm.

400 gal./1,514.2 L

315 lbs./142.9 kg.

No



	1
Yellow No Drain	
Yellow Drain	
Common Name	
Dimensions Width Depth Height	
Sump Capacity	
Weight	
Load Capacity Uniform Distributed Load (UDL)	
Fork Pockets	

_	
1645STC	

Soft Top

Containment Unit

62 in./157.6 cm.

74 in./187.9 cm.

68 in./172.8 cm.



4 Drum Poly

Storage Building

57½ in./146.1 cm.

57½ in./146.1 cm.

72 in./182.9 cm.

66 gal./249.9 L

1626

2 Drum Low-Profile

Workstation

60 in./152.4 cm.

34 in./86.4 cm.

46 in./116.9 cm.

110 gal./416.4 L

Yes

1628

2 Drum High-Profile

Workstation

60 in./152.4 cm.

34 in./86.4 cm.

64 in./162.6 cm.

220 gal./832.8 L

Yellow No Drain Yellow Drain Black No Drain Black Drain

Common Name

Dimensions

1680

IBC Containment Unit

with Steel Platform

67 in./170.2 cm.

67 in./170.2 cm.

26 in./66.1 cm.

400 gal./1,514.2 L

No

IBC Containment Unit with Soft Top Cover and

1683B 1684B 1683BD 1684BD IBC Containment Unit with Poly Platform Double All Poly IBC Containment Unit

1683

1683D

(Tank not included)

67 in./170.2 cm.

67 in./170.2 cm.

26 in./66.1 cm.

400 gal./1,514.2 L

245 lbs./111.1 kg.

No




66 gal./249.9 L
120 lbs./54.4 kg.




Yes











Yes





Fork Pockets

Compliance


Sump Capacity





10,000 lbs./4,536 kg.





Compliance





























Soft Top Containment

The NEW Eagle Soft Top Containment Unit (Model 1645STC) provides protection from the elements for up to four 55-gallon (208.2 L) drums with a durable soft top cover built on a 4-drum HDPE containment pallet. Ships unassembled for reduced shipping costs. Easy step-by-step assembly for a secure and quick weather resistant containment solution. The height of the cover allows storage with drum pumps in place.

The four drum pallet is 100% HDPE construction that resists corrosion and weathering. The flexible soft top is constructed of high-vis yellow PVC fabric over a rugged galvanized steel frame. Access drums through the front or back. For maximum loading and unloading ease use with the Eagle HDPE Poly Ramp (Model 1689 – Sold Separately.)



4 Drum Poly Storage Building

Securely stores up to four 55-gallon (208.2 L) drums. Features four-way forklift pockets, vented door louvers, removable grating and top hooks for moving. **[Note:]** Top hooks are intended only for moving empty building. Door opening accepts up to a 48 in. x 48 in. (122 cm. x 122 cm.) pallet. (Use a cable to lock.)



2 Drum Workstations

A secure way to store drums inside or outside. Available in low (1626) or high (1628) profile for the storage of two drums. Units can be moved via forklift and have optional dolly allowing for easier movement on worksite. Includes locks for secure storage.



Did you know?

Use a 1645STC Kit to convert an Eagle 1645 model into a 1645STC. Use a 1683STC Kit to convert an Eagle 1683 model into a 1683STC. (Kits ship flat. Assembly required.)



- Come with 100 percent polyethylene containment tub and your choice of metal or poly platforms
- Model 1684 includes two front bucket wells for easy dispensing











SPILL CONTAINMENT SUMPS AND SPILL KIT BOXES 1624K 1625K **No Drain** 16275 16550 1624KB 1625KB Drain 16275D 16550D **Horizontal Tank Spill Horizontal Tank Spill Common Name** Spill Kit Box with Lid Spill Kit Box with Lid Containment Sump Containment Sump 62 in./157.5 cm. 88 in./223.6 cm. 60 in./152.4 cm. 60 in./152.4 cm. 44 in./111.8 cm. **Dimensions** 84 in./213.4 cm. 34 in./86.4 cm. 34 in./86.4 cm. 30 in./76.2 cm. 33 in./83.9 cm. 24 in./61 cm. 42 in./106.7 cm. **Sump Capacity** 373 gal./1,412 L 635 gal./2,403.8 L 110 gal./416.4 L 220 gal./832.8 L Weight 96 lbs./43.1 kg. 118 lbs./53.6 kg. 75 lbs./34.1 kg. 110 lbs./49.9 kg. Load Capacity Uniform Distributed Load (UDL) 10,000 lbs./4,536 kg 10,000 lbs./4,536 kg. **Fork Pockets** No No Yes Yes **Compliance** Model 1624K with 1624 Caster Kit



Spill Containment Sumps:

Economical containment solutions for 275- (1,040 L) & 550-gallon (2,081 L) horizontal tanks

• One-piece molded HDPE design that will not rust or corrode



Model 1624CASTER Wheel kit with 6 casters

for 1624K, 1624KB, 1625K,1625KB (Assembly Required) (Kit Sold Separately)

Spill Kit Boxes:

Spill Kit Boxes come in two sizes (110- and 220-gallon/416.4 and 832.8 L) in yellow or black HDPE, and work well for both routine maintenance and emergency spill response. Optional wheel kit (1624CASTER) sold separately. (two locking and two swivel – 6 in. casters)









1697Y

95 e-CART Wheeled Spill Kit Cart

36 in./91.5 cm.

30 in./76.2 cm.

44 in./111.8 cm.

95 gal./359.7 L

38 lbs./17.3 kg.

Model	1617Y	1613	1696Y
ltem	Drum Containment Dollie	Drum Bogie	65 e-CART Wheeled Spill Kit Cart
Dimensions Width Depth Height	31¾ in./81 cm. 69 in./175.2 cm. 26½ in./67 cm.	35¾ in./90 cm. 42in./106 cm. -	26 in./66.1 cm. 30 in./76.2 cm. 42½ in./108 cm.
Sump Capacity	70 gal./266 L	12 gal./45.6 L	65 gal./247 L
Weight	98 lbs./44.5 kg.	30 lbs./13.5 kg.	32 lbs./14.6 kg.
Load Capacity Uniform Distributed Load (UDL)	600 lbs./270 kg.	1250 lbs./526 kg.	-

Drum Containment Dollie

The Eagle Drum Containment Dollie is constructed of Yellow HDPE with double black straps for easy loading, and its lightweight design with rounded handles for easy tipping. The Dollie transports 55-gallon (208.2 L) drums with ease, and tilts to become a self-dispensing unit. It also acts as its own secondary containment unit.

Features

- Tough yellow polyethylene construction with a lightweight design
- Extra large, easy roll 10 in. (25.4 cm.) poly wheels
- · Drain Plug that simplifies removal of contents from sump
- Holds up to 600 lbs. (272.2 kg.) (UDL)
- Double buckle and strap
- · Forkliftable from the rear
- Molded handles
- Rounded handle makes lifting easy

55- (208.2 L) and 95-gallon (359.7 L) drums. The durable polyethylene Bogie resists corrosion; has five swivel casters for maximum stability, load capacity and maneuverability; and features a poly push-pull handle. Ships via UPS.

Mobile dispensing unit protects against

Drum Bogie

incidental spills and leaks for 30- (113.6 L),

Eagle e-CART Wheeled Spill Kit Cart Features:

- Constructed of durable HDPE
- Ergonomically designed handles
- Double-walled hinged lid with a hold-down tab
- Rugged galvanized steel bar handles
- HDPE wheels on a heavy duty steel axle
- Wear tabs on the bottom
- Ergonomically designed



Model T8609 Fitted and durable poly cover available to protect from the elements

Model 1617Y

Drum Containment Dollie





Containment Utility Tray

This HDPE tray is an affordable way to contain small spills up to five gallons. For countertop use for the working storage of lab chemicals, as a drip pan under dispensers, or as a floor tray under machinery. These trays are stackable for easy storage and feature a ribbed bottom.



		p: :	107 : 14
Model No.	Item	Dimensions	Weight
1677	Containment Utility Tray (Yellow)	18 in. x 36 in. x 2 in. 45.8 cm. x 91.5 cm. x 5 cm.	9 lbs./4.1 kg.
1677BLK	Containment Utility Tray (Black)	18 in. x 36 in. x 2 in. 45.8 cm. x 91.5 cm. x 5 cm.	9 lbs./4.1 kg.

Model 1677 (Yellow) Containment Utility Tray 18 in. x 36 in. x 2 in. 45.8 cm. x 91.5 cm. x 5.1 cm.

Model 1677 BLACK Containment Utility Tray 18 in. x 36 in. x 2 in. 45.8 cm. x 91.5 cm. x 5.1 cm.

ELACK tility Tray 2 in. cm. x 5.1 cm.

Pallet Grating Available

For use with pallets and platforms on pages 31-33

Model No. Dimensions		Grating Opening
1642IB	51½ in. x 25¼ in./130.9 cm. x 64.2 cm.	2½ in. x 3¾ in. max./6.4 cm. x 8.1 cm.
1642B	51½ in. x 25¼ in./130.9 cm. x 64.2 cm.	1¾ in. x 1¾ in. max./4.5 cm. x 4.5 cm.
1642IS	25½ in. x 25½ in./64.2 cm. x 64.2 cm.	2½ in. x 3¾ in. max./6.4 cm. x 8.1 cm.

Model 1642IB

Single Drum Containment Unit

The Single Drum Containment Unit (1612) is ideal for not only use as a spill containment unit, but also a mobile pumping station or waste collection station. With the addition of model 1698 overpack dolly, the drum is easy to move for dispensing and collection.

Compliance: EPA 40 CFR 264.175



100% Recyclable

Model No.	Item	Dimensions	Weight	Load Capacity (UDL)
1612	Single Drum Unit	31 in. x 33 in. 78.8 cm. x 83.9 cm.	30 lbs./13.6 kg.	1,000 lbs./453.6 kg.
1954	Vertical Drum Lifter	-	12 lbs./5.5 kg.	1,000 lbs./453.6 kg.
1958	Horizontal Drum Lifter	-	5 lbs./2.3 kg.	1,000 lbs./453.6 kg.
1698	Overpack Dolly	21.5 in. x 7 in. 69.9 cm. x 17.8 cm.	30 lbs./13.6 kg.	1,000 lbs./453.6 kg.

Model 1612 Single Drum Unit can be used with model 1698 overpack dolly

Model 1954 Drum Lifter



Model 1698 Overpack Dolly





Mobile Spill Platform and Drum Accessories

Mobile Spill Control Platform

The safety of a spill containment platform with the convenience of mobility; safely transfer containers between workstations.

Drum Funnel and Cover

The 18 in. (45.8 cm.) wide drum funnel fits both 30- (113.5 L) and 55-gallon (208.2 L) drums. The 6 in. (15.3 cm.) high side walls reduce splashing and spout fits any 2 in. (5.1 cm.) NPT bung. The optional funnel cover keeps out dirt and contaminants.

Compliance: EPA 40 CFR 265.173.

Drum Covers

HDPE construction, covers for closed (1666) or open (1667) head drums.

Drum Tray and Drip Pan

Eagle Poly Drum Tray is ideal under drums where dispensing or filling takes place. The drip pan catches up to one gallon of oils, coolants, water or other non-aggressive liquids. Constructed of high density polyethylene (HDPE). Model 1614 without black HDPE grating, Model 1615 with black HDPE grating. For use with Eagle Model 1618 — Drum Tray Dolly with four 3 inch casters.




Model 1670 Drip Pan Filled with Polypropylene



Model 1666 Drum Covers



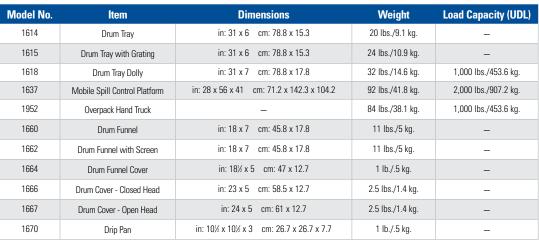

2,000 lb./902.2 kg. load capacity

Model 1637 Mobile Spill Platform - 30-gallon (113.6 L) capacity. Lab Pack and Drum not included (2 locking and 2 swivel casters)



Model 1660 Drum Funnel Model 1664 Drum Funnel Cover



Model 1614 Drum Tray
Model 1618 Drum Tray Dolly with Four 3 in.
(7.7 cm.) casters







Model T8101G

Height 3 in.

(7.6 cm.)



Eagle Quik-Deploy™ Spill NEST™

The Eagle Quik-Deploy^M Spill *NEST* M is a compact and affordable solution for fast response to leaks and drips. This product features a 4 in. low profile sidewall and is available in six sizes, which are leak tested before shipment. Made in the USA.

Perfect for:

- Changing oils and fluids
- Quick use under leaking vehicles
- Protecting bottom surfaces while dispensing
- Performing maintenance on an item with spill potential
- Constructed of PVC Coated Fabric
- Made in the USA



Model No.	Description	Weight	Spill Capacity	Compliance
T8001	Quik-Deploy™ Spill <i>NEST™</i> 2 ft. x 2 ft. x 4 in./.6 m. x .6 m. x 10.2 cm.	1 lb./.5 kg.	10 gal./37.9 L	⊕ SPCC
T8002	Quik-Deploy™ Spill <i>NEST™</i> 2 ft. x 3 ft. x 4 in./.6 m. x .9 m. x 10.2 cm.	3 lbs./1.4 kg.	15 gal./56.8 L	
T8003	Quik-Deploy [™] Spill <i>NEST</i> [™] 2 ft. x 4 ft. x 4 in./.61 m. x 1.3 m. x 10.2 cm.	4 lbs./1.9 kg.	20 gal./75.7 L	and a
T8004	Quik-Deploy™ Spill <i>NEST™</i> 3 ft. x 3 ft. x 4 in./.9 m. x .9 m. x 10.2 cm.	5 lbs./2.3 kg.	22.5 gal./85.2 L	NPDES
T8005	Quik-Deploy [™] Spill <i>NEST</i> [™] 4 ft. x 4 ft. x 4 in./1.22 m. x 1.22 m. x 10.2 cm.	5.5 lbs./2.5 kg.	40 gal./151 L	
T8006	Quik-Deploy™ Spill <i>NEST™</i> 4 ft. x 6 ft. x 4 in./1.22 m. x 1.9 m. x 10.2 cm.	7 lbs./3.2 kg.	60 gal./227 L	 ⊕EPA

Eagle Quik-Deploy[™] Folding Spill*NEST*[™]

The Eagle Quik-Deploy^m Folding Spill*NEST* m has the same durable, high-quality construction as the Quik-Deploym Spill*NEST* m.

Features:

- A thinner 2 in. (5.1 cm.) sidewall width
- A safety-secure strap for easy folding and storage
- An extended 6 in. (15.3 cm.) sidewall height that allows for up to 30 percent more spill capacity
- Conveniently folds saving shipping and storage space
- Constructed of PVC Coated Fabric
- Made in the USA



Model No.	Description	Weight	Spill Capacity	
T8001FS	Quik-Deploy™ Folding Spill NEST™2 ft. x 2 ft. x 6 in./.61 m. x .61 m. x 15 cm.	1 lb./.5 kg.	15 gal./56.8 L	
T8002FS	Quik-Deploy™ Folding Spill <i>NEST™</i> 2 ft. x 3 ft. x 6 in./.61 m. x .91 m. x 15 cm.	3 lbs./1.4 kg.	22 gal./83.3 L	
T8003FS	Quik-Deploy™ Folding Spill <i>NEST™</i> 2 ft. x 4 ft. x 6 in./.61 m. x 1.22 m. x 15 cm.	4 lbs./1.9 kg.	30 gal./113.6 L	
T8004FS	Quik-Deploy™ Folding Spill NEST™3 ft. x 3 ft. x 6 in./.91 m. x .91 m. x 15 cm.	5 lbs./2.3 kg.	34 gal./128.7 L	
T8005FS	Quik-Deploy™ Folding Spill NEST™ 4 ft. x 4 ft. x 6 in./1.22 m. x 1.22 m. x 15 cm.	5.5 lbs./2.5 kg.	60 gal./227.2 L	
T8006FS	Quik-Deploy™ Folding Spill NEST™ 4 ft. x 6 ft. x 6 in./1.22 m. x 1.83 m. x 15 cm.	7 lbs./3.2 kg.	74 gal./280.2 L	



Eagle Spill NEST™

Available with or without grating

The Eagle Spill NEST™ line delivers easy-to-use, affordable, temporary spill containment for drums, machine parts, small equipment and other jobsite needs. This new product is available with or without the classic black HDPE grating used in Eagle's market-leading HDPE Spill Containment Pallets. Available in six sizes.

Features:

- Foam sidewalls that easily spring back into place after pressure is applied
- Folds for easy storage
- Affordable and reusable
- No need for ramps, drive in and drive out with hand trucks
- Constructed of PVC Coated Fabric
- Made in the USA



	Widdel 18101			
Model No.	Description	Weight	Spill Capacity*	Compliance
T8101	1 Drum Spill <i>NEST™</i> 32.25 in. x 32.25 in./.82 m. x .82 m.	2 lbs./.9 kg.	10 gal./37.9 L	
T8101G	1 Drum Spill <i>NEST™</i> with Grate 32.25 in. x 32.25 in./.82 m. x .82 m.	7 lbs./3.2 kg.	10 gal./37.9 L	
T8102	2 Drum Spill <i>NEST™</i> 32.25 in. x 57.75 in./.82 m. x 1.47 m.	4 lbs./1.9 kg.	15 gal./56.8 L	
T8102G	2 Drum Spill <i>NEST™</i> with Grate 32.25 in. x 57.75 in./.82 m. x 1.47 m.	15 lbs./6.8 kg.	15 gal./56.8 L	⊕ SPCC
T8103	4 Drum Spill <i>NEST™</i> 57.75 in. x 57.75 in./1.47 m. x 1.47 m.	8 lbs./3.7 kg.	30 gal./113.6 L	
T8103G	4 Drum Spill <i>NEST™</i> with Grate 57.75 in. x 57.75 in./1.47 m. x 1.47 m.	30 lbs./13.6 kg.	30 gal./113.6 L	
T8104	4 Drum In-Line Spill <i>NEST™</i> 32.25 in. x 107.75 in./.82 m. x 2.74 m.	8 lbs./3.7 kg.	30 gal./113.6 L	Classical Classical Control Co
T8104G	4 Drum In-Line Spill <i>NEST</i> ™ with Grate 32.25 in. x 107.75 in./.82 m. x 2.74 m.	30 lbs./13.6 kg.	30 gal./113.6 L	
T8105	6 Drum Spill <i>NEST™</i> 57.75 in. x 83 in./1.47 m. x 2.10 m.	12 lbs./ 5.6 kg.	45 gal./170.4 L	NPBES
T8105G	6 Drum Spill <i>NEST™</i> with Grate 57.75 in. x 83 in./1.47 m. x 2.10 m.	45 lbs./20.6 kg.	45 gal./170.4 L	
T8106	8 Drum Spill <i>NEST™</i> 57.5 in. x 108.5 in./1.47 m. x 2.76 m.	13 lbs./5.9 kg.	60 gal./227.2 L	
T8106G	8 Drum Spill <i>NEST</i> [™] with Grate 57.5 in. x 108.5 in./1.47 m. x 2.76 m.	57 lbs./25.9 kg.	60 gal./227.2 L	





Model T8101







Eagle Spill NEST™ Berm with Removable Sidewalls

The Eagle Spill*NEST* [™] Berm with Removable Sidewalls assists with safety and compliance on the job site. Available in Economy, Standard and Heavy Duty designs. The sturdy design incorporates high strength connectors and a two-way air relief system to facilitate automatic entry and exit at any angle.

Conveniently folds, stacks and stores on a shelf or in a container for immediate use, setup and reuse. To maintain quality and life of your Spill*NEST*™ Berm, Eagle offers accessories including Ground Pads, Track Mats and Storage Bags.

- For oil and gas sites and other large area applications
- Easy to assemble
- Folds, stacks and stores conveniently
- Ready for immediate setup and use
- Durable and reusable
- 13 sizes available
- Made in the USA
- Available in Economy, Standard and Heavy Duty material variations
- Entry and exit from any point without harming foam logs



Heavy Duty Standard Economy

3 material variations:

- Economy SpillNEST[™] Berm is designed for indoor and temporary outdoor use (Yellow PVC)
 - Standard SpillNEST[™] Berm is designed for indoor and outdoor use with moderate to heavy traffic (Black XR5 Material)
 - Heavy Duty SpillNEST[™] Berm is designed for rugged outdoor use with heavy to extreme traffic (Tan PTFF)

Eagle Spill *NEST™* Berm with Removable Side Walls

	888888 888888888888888888888888888888			8888	
Model	Description	Ship Weight	Ground Pad	Track Mat	Compliance
T8201BK T8201TN T8201YE	505 gal./1,912 L, Standard - 12 ft. x 15 ft. x 4.5 in./3.65 m. x 4.50 m. x 11.43 cm Black 438 gal./1,658 L, Heavy Duty - 12 ft. x 13 ft. x 4.5 in./3.65 m. x 3.96 m. x 11.43 cm Tan 505 gal./1,912 L, Economy - 12 ft. x 15 ft. x 4.5 in./3.65 m. x 4.50 m. x 11.43 cm Yellow	58 lbs./26.3 kg. 61 lbs./27.7 kg. 47 lbs./21.3 kg.	T8201GP T8201GP T8201GP	T8201TM T8201TM T8201TM	≟=== ⊕ ≎EPA
T8202BK T8202TN T8202YE	707 gal./2,676 L, Standard - 12 ft. x 21 ft. x 4.5 in./3.65 m. x 6.40 m. x 11.43 cm Black 640 gal./2,423 L, Heavy Duty - 12 ft. x 19 ft. x 4.5 in./3.65 m. x 5.79 m. x 11.43 cm Tan 707 gal./2,676 L, Economy - 12 ft. x 21 ft. x 4.5 in./3.65 m. x 6.40 m. x 11.43 cm Yellow	70 lbs./31.8 kg. 75 lbs./34.1 kg. 56 lbs./25.4 kg.	T8202GP T8202GP T8202GP	T8202TM T8202TM T8202TM	±===
T8203BK T8203TN T8203YE	1,110 gal./4,202 L, Standard - 12 ft. x 33 ft. x 4.5 in./3.65 m. x 10.06 m. x 11.43 cm Black 1,010 gal./3,823 L, Heavy Duty - 12 ft. x 30 ft. x 4.5 in./3.65 m. x 9.14 m. x 11.43 cm Tan 1,110 gal./4,202 L, Economy - 12 ft. x 33 ft. x 4.5 in./3.65 m. x 10.06 m. x 11.43 cm Yellow	105 lbs./47.6 kg. 112 lbs./50.8 kg. 84 lbs./38.1 kg.	T8203GP T8203GP T8203GP	T8203TM T8203TM T8203TM	<u>≇≡≡≡</u>
T8204BK T8204TN T8204YE	1,310 gal./4,959 L, Standard - 12 ft. x 39 ft. x 4.5 in./3.65 m. x 11.89 m. x 11.43 cm Black 1,380 gal./5,224 L, Heavy Duty - 12 ft. x 41 ft. x 4.5 in./ 3.65 m. x 12.50 m. x 11.43 cm Tan 1,310 gal./4,959 L, Economy - 12 ft. x 39 ft. x 4.5 in./3.65 m. x 11.89 m. x 11.43 cm Yellow	140 lbs./63.5 kg. 150 lbs./68.0 kg. 112 lbs./50.8 kg.	T8204GP T8204GP T8204GP	T8204TM T8204TM T8204TM	±===
T8205BK T8205TN T8205YE	1,715 gal./6,492 L, Standard - 12 ft. x 51 ft. x 4.5 in./3.65 m. x 15.54 m. x 11.43 cm Black 1,750 gal./6,625 L, Heavy Duty - 12 ft. x 52 ft. x 4.5 in./3.65 m. x 12.50 m. x 11.43 cm Tan 1,715 gal./6,492 L, Economy - 12 ft. x 51 ft. x 4.5 in./3.65 m. x 15.54 m. x 11.43 cm Yellow	175 lbs./79.4 kg. 185 lbs./83.9 kg. 140 lbs./63.5 kg.	T8205GP T8205GP T8205GP	T8205TM T8205TM T8205TM	±===
T8206BK T8206TN T8206YE	2,121 gal./8,029 L, Standard - 12 ft. x 63 ft. x 4.5 in./3.65 m. x 19.2 m. x 11.43 cm Black 2,121 gal./8,029 L, Heavy Duty - 12 ft. x 63 ft. x 4.5 in./3.65 m. x 19.2 m. x 11.43 cm Tan 2,121 gal./8,029 L, Economy - 12 ft. x 63 ft. x 4.5 in./3.65 m. x 19.2 m. x 11.43 cm Yellow	210 lbs./95.3 kg. 223 lbs./101.2 kg. 168 lbs./76.2 kg.	T8206GP T8206GP T8206GP	T8206TM T8206TM T8206TM	±===
T8207BK T8207TN T8207YE	2,626 gal./9,941 L, Standard - 24 ft. x 39 ft. x 4.5 in./7.32 m. x 11.89 m. x 11.43 cm Black 2,760 gal./10,448 L, Heavy Duty - 24 ft. x 41 ft. x 4.5 in./7.32 m. x 12.50 m. x 11.43 cm Tan 2,626 gal./9,941 L, Economy - 24 ft. x 39 ft. x 4.5 in./7.32 m. x 11.89 m. x 11.43 cm Yellow	280 lbs./127 kg. 310 lbs./141 kg. 224 lbs./102 kg.	T8207GP T8207GP T8207GP	T8207TM T8207TM T8207TM	≟≡≅ 🎒 ≎EPA
T8208BK T8208TN T8208YE	3,434 gal./12,999 L, Standard - 24 ft. x 51 ft. x 4.5 in./11.89 m. x 15.54 m. x 11.43 cm Black 3,501 gal./ 13, 253 L, Heavy Duty - 24 ft. x 52 ft. x 4.5 in./ 11.98 m. x 15.85 m. x 11.43 cm Tan 3,434 gal./ 12,999 L, Economy - 24 ft. x 51 ft. x 4.5 in./11.89 m. x 15.54 m. x 11.43 cm Yellow	340 lbs./154 kg. 360 lbs./163 kg. 272 lbs./123 kg.	T8208GP T8208GP T8208GP	T8208TM T8208TM T8208TM	±===
T8209BK T8209TN T8209YE	4,241 gal./16,054 L, Standard - 24 ft. x 63 ft. x 4.5 in./11.98 m. x 19.20 m. x 11.43 cm Black 4,241 gal./16,054 L, Heavy Duty - 24 ft. x 63 ft. x 4.5 in./11.98 m. x 19.20 m. x 11.43 cm Tan 4,241 gal./16,054 L, Economy - 24 ft. x 63 ft. x 4.5 in./11.98 m. x 19.20 m. x 11.43 cm Yellow	410 lbs./186 kg. 435 lbs./197 kg. 328 lbs./149 kg.	T8209GP T8209GP T8209GP	T8209TM T8209TM T8209TM	<u>≜≡≡</u>
T8210BK T8210TN T8210YE	3,939 gal./14, 911 L, Standard - 36 ft. x 39 ft. x 4.5 in./10.97 m. x 11.89 m. x 11.43 cm Black 4,140 gal./15,672 L, Heavy Duty - 36 ft. x 41 ft. x 4.5 in./10.97 m. x 12.50 m. x 11.43 cm Tan 3,939 gal./14, 911 L, Economy - 36 ft. x 39 ft. x 4.5 in./10.97 m. x 11.89 m. x 11.43 cm Yellow	385 lbs./175 kg. 403 lbs./183 kg. 308 lbs./140 kg.	T8210GP T8210GP T8210GP	T8210TM T8210TM T8210TM	±===
T8211BK T8211TN T8211YE	5,150 gal./19,495 L, Standard - 36 ft. x 51 ft. x 4.5 in./10.97 m. x 15.54 m. x 11.43 cm Black 5,251 gal./19,877 L, Heavy Duty - 36 ft. x 52 ft. x 4.5 in./10.97 m. x 15.85 m. x 11.43 cm Tan 5,150 gal./19,495 L, Economy - 36 ft. x 51 ft. x 4.5 in./10.97 m. x 15.54 m. x 11.43 cm Yellow	515 lbs./234 kg. 535 lbs./243 kg. 412 lbs./187 kg.	T8211GP T8211GP T8211GP	T8211TM T8211TM T8211TM	<u>≢≡≡</u>
T8212BK T8212TN T8212YE	6,362 gal./24,083 L, Standard - 36 ft. x 63 ft. x 4.5 in./10.97 m. x 19.20 m. x 11.43 cm Black 6,362 gal./24,083 L, Heavy Duty - 36 ft. x 63 ft. x 4.5 in./10.97 m. x 19.20 m. x 11.43 cm Tan 6,362 gal./24,083 L, Economy - 36 ft. x 63 ft. x 4.5 in./10.97 m. x 19.20 m. x 11.43 cm Yellow	650 lbs./295 kg. 690 lbs./313 kg. 520 lbs./236 kg.	T8212GP T8212GP T8212GP	T8212TM T8212TM T8212TM	±===
T8213BK T8213TN T8213YE	8,483 gal./32,112 L, Standard - 48 ft. x 63 ft. x 4.5 in./14.60 m. x 19.20 m. x 11.43 cm Black 8,483 gal./32,112 L, Heavy Duty - 48 ft. x 63 ft. x 4.5 in./14.60 m. x 19.20 m. x 11.43 cm Tan 8,483 gal./32,112 L, Economy - 48 ft. x 63 ft. x 4.5 in./14.60 m. x 19.20 m. x 11.43 cm Yellow	800 lbs./363 kg. 850 lbs./286 kg. 640 lbs./290 kg.	T8213GP T8213GP T8213GP	T8213TM T8213TM T8213TM	≗===
T820064 T820070	Removable Foam Log - 64 in. x 4.5 in. x 4.5 in./162.56 cm. x 11.43 cm. x 11.43 cm Yellow Removable Foam Log - 70 in. x 4.5 in. x 4.5 in./177.80 cm. x 11.43 cm. x 11.43 cm.	8 lbs./3.6 kg. 9 lbs./4.1 kg.	- -	<u>-</u>	≟===









		10.1		
Model No.	Description	Weight	Spill Cap.	
T8421	Talon™ SX Berm - Black 4 ft. x 4 ft. x 8 in./1.22 m. x 1.22 m. x 20 cm.	11 lbs./5 kg.	80 gal./303 L	
T8422	Talon™ SX Berm - Black 4 ft. x 4 ft. x 1 ft./1.22 m. x 1.22 m. x 30 cm.	18 lbs./8.2 kg.	119 gal./451 L	
T8423	Talon™ SX Berm - Black 4 ft. x 6 ft. x 8 in./1.22 m. x 1.83 m. x 20 cm.	25 lbs./11.3 kg.	119 gal./451 L	_ SPCC
T8424	Talon™ SX Berm - Black 4 ft. x 6 ft. x 1 ft./1.22 m. x 1.83 m. x 30 cm.	28 lbs./12.7 kg.	179 gal./678 L	- COMPLINAT
T8425	Talon™ SX Berm - Black 4 ft. x 8 ft. x 8 in./1.22 m. x 2.44 m. x 20 cm.	21 lbs./9.5 kg.	159 gal./602 L	
T8426	Talon™ SX Berm - Black 5 ft. x 10 ft. x 1 ft./1.52 m. x 3.05 m. x 20 m.	45 lbs./20.4 kg.	374 gal./1,416 L	
T8427	Talon™ SX Berm - Black 6 ft. x 6 ft. x 1 ft./1.83 m. x 1.83 m. x 30 cm.	37 lbs./16.8 kg.	269 gal./1,018 L	NPDES
T8428	Talon™ SX Berm - Black 8 ft. x 8 ft. x 8 in./ 2.44 m. x 2.44 m. x 20 cm.	35 lbs./15.9 kg.	319 gal./1,208 L	
T8429	Talon™ SX Berm - Black 10 ft. x 10 ft. x 1 ft./3.05 m. x 3.05 m. x 20 cm.	60 lbs./27.2 kg.	748 gal./2,832 L	≎EPA
T8430	Talon™ SX Berm - Black 12 ft. x 12 ft x 1 ft./3.65 m. x 3.65 m. x 30 cm.	80 lbs./36.3 kg.	1,077 gal. 4,077L	VLIA
T8431	Talon™ SX Berm - Black 16 ft. x 16 ft. x 1 ft./4.87 m. x 4.87 m. x 30 cm.	113 lbs./51.3 kg.	1,914 gal. 7,245 L	
T8432	Talon™ SX Berm - Black 10 ft. x 26 ft. x 1 ft./3.05 m. x 7.93 m. x 30 cm.	122 lbs./55.3 kg.	1,944 gal. 7,359 L	
T8433	Talon™ SX Berm - Black 10 ft. x 40 ft. x 1 ft./3.05 m. x 12.19 m. x 30 cm.	150 lbs./68.0 kg.	2,992 gal. 11,326 L	EPA 40 CFR 264.175, SPCC, NPDES
T8434	Talon™ SX Berm - Black 10 ft. x 45 ft. x 1 ft./3.05 m. x 13.72 m. x 30 cm.	155 lbs./70.3 kg.	3,366 gal. 12,742 L	EPA 40 CFR 264.175, SPCC, NPDES
T8435	Talon™ SX Berm - Black 12 ft. x 20 ft. x 1 ft./3.66 m. x 6.09 m. x 30 cm.	130 lbs./59 kg.	1,795 gal. 6,795 L	EPA 40 CFR 264.175, SPCC, NPDES
T8436	Talon™ SX Berm - Black 12 ft. x 26 ft. x 1 ft./3.66 m. x 7.92 m. x 30 cm.	140 lbs./63.5 kg.	2,334 gal. 8,835 L	N/A
T8437	Talon™ SX Berm - Black 12 ft. x 36 ft. x 1 ft./3.66 m. x 10.97 m. x 30 cm.	165 lbs./74.8 kg.	3,231 gal. 12,231 L	■■■ ©EPA
T8438	Talon™ SX Berm - Black 12 ft. x 50 ft. x 1 ft./3.66 m. x 15.24 m. x 30 cm.	250 lbs./113 kg.	4,488 gal. 16,989 L	EPA 40 CFR 264.175, SPCC, NPDES
T8439	Talon™ SX Berm - Black 15 ft. x 50 ft. x 1 ft./4.57 m. x 15.24 m. x 30 cm.	268 lbs./122 kg.	5,610 gal. 21,236 L	0.0000
T8440	Talon™ SX Berm - Black 14 ft. x 54 ft. x 1 ft./4.27 m. x 16.46 m. x 30 cm.	252 lbs./114 kg.	5,654 gal. 21,402 L	The state of the s
T8441	Talon™ SX Berm - Black 12 ft. x 60 ft. x 1 ft./3.66 m. x 18.29 m. x 30 cm.	285 lbs./129 kg.	5,385 gal. 20,384 L	NUPLES
T8442	Talon™ SX Berm - Black 14 ft. x 66 ft. x 1 ft./4.27 m. x 20.12 m. x 30 cm.	337 lbs./153 kg.	6,911 gal. 26,161 L	≎EPA
T8443	Talon™ SX Berm - Black 14 ft. x 85 ft. x 1 ft./4.27 m. x 25.91 m. x 30 cm.	500 lbs./227 kg.	8,901 gal. 33,694 L	VEFA
T8444	Talon™ SX Berm - Black 20 ft. x 40 ft. x 1 ft./6.09 m. x 12.19 m. x 30 cm.	280 lbs./127 kg.	5,984 gal. 22,652 L	EPA 40 CFR 264.175, SPCC, NPDES
T8445	Talon™ SX Berm - Black 20 ft. x 60 ft. x 1 ft./6.09 m. x 4.57 m. x 30 cm.	600 lbs./272 kg.	8,976 gal. 33,694 L	EPA 40 CFR 264.175, SPCC, NPDES
T8446	Talon™ SX Berm - Black 25 ft. x 40 ft. x 1 ft./7.62 m. x 12.19 m. x 30 cm.	310 lbs./141 kg.	7,480 gal. 28,315 L	EPA 40 CFR 264.175, SPCC, NPDES

Eagle Talon™ SX Berm

The Eagle Talon™ SX Berm features excellent rip, tear and puncture resistance for the most demanding application or terrain. To maintain quality and life of your Talon™SX Berm, Eagle offers accessories including Ground Pads, Track Mats and Storage Bags. See page 51.

- Ideal for fuel use
- Constructed of XR5 Fabric
- Easy to assemble
- Compact storage and transport
- CAD design and cut components
- Lap joint welds for maximum strength
- Snap-up design permits immediate response



Eagle Talon™ SX L-Bracket Berm

- Space saving design
- 2 ft. (61 cm.) wall height
- Quick setup
- Brackets can be mounted inboard or outboard
- Available to match many chemical applications
- Compact shipping and storage

	Model No.	Description	Weight	Spill Cap.	Compliance
,	T8447	Talon™ SX L-Bracket Berm - Black 10 ft. x 10 ft. x 2 ft./3.05 m. x 3.05 m. x 61cm.	180 lbs. 81.7 kg.	1,496 gal. 5,663 L	EPA 40 CFR 264.175, SPCC, NPDES
,	T8448	Talon™ SX L-Bracket Berm - Black 15 ft. x 15 ft. x 2 ft./4.57 m. x 4.57 m. x 61 cm.	360 lbs. 163 kg.	3,366 gal. 12,742 L	EPA 40 CFR 264.175, SPCC, NPDES
	T8449	Talon™ SX L-Bracket Berm - Black 20 ft. x 20 ft. x 2 ft./6.10 m. x 6.10 m. x 61 cm.	380 lbs. 172 kg.	5,984 gal. 22,652 L	EPA 40 CFR 264.175, SPCC, NPDES


Model No.	Description	Weight	Spill Cap.	Compliance
T8401	Talon [™] Spill Berm 4 ft. x 4 ft. x 8 in./1.22 m. x 1.22 m. x 20 cm.	15 lbs./6.8 kg.	80 gal./320 L	EPA 40 CFR 264.175, SPCC, NPDES
T8402	Talon [™] Spill Berm 6 ft. x 6 ft. x 8 in./1.83 m. x 1.83 m. x 20 cm.	24 lbs./10.9 kg.	180 gal./480 L	EPA 40 CFR 264.175, SPCC, NPDES
T8403	Talon [™] Spill Berm 10 ft. x 10 ft. x 8 in./3.05 m. x 3.05 m. x 20 cm.	36 lbs./16.3 kg.	501 gal./2,004 L	EPA 40 CFR 264.175, SPCC, NPDES
T8404	Talon [™] Spill Berm 4 ft. x 6 ft. x 8 in./1.22 m. x 1.83 m. x 20 cm.	18 lbs./8.2 kg.	120 gal./480 L	EPA 40 CFR 264.175, SPCC, NPDES
T8405	Talon™ Spill Berm 4 ft. x 8 ft. x 8 in./1.22 m. x 2.44 m. x 20 cm.	28 lbs./12.7 kg.	160 gal./640 L	EPA 40 CFR 264.175, SPCC, NPDES
T8406	Talon [™] Spill Berm 8 ft. x 8 ft. x 8 in./2.44 m. x 2.44 m. x 20 cm.	31 lbs./14.1 kg.	320 gal./1,280 L	EPA 40 CFR 264.175, SPCC, NPDES
T8407	Talon™ Spill Berm 8 ft. x 10 ft. x 8 in./2.44 m. x 3.05 m. x 20 cm.	38 lbs./17.2 kg.	400 gal./1,600 L	EPA 40 CFR 264.175, SPCC, NPDES

Model No.	Description	Weight	Spill Cap.
T8340	Spill <i>NEST™</i> Drip Pad 22 in. x 22 in./56 cm. x 56 cm. (Small)	7 lbs./3.2 kg.	1 gal./3.8 L
T8340RP 5 pack	Spill <i>NEST™</i> Drip Pad Replacement Pads (Small)	6 lbs./2.7 kg.	1 gal./3.8 L
T8341	Spill <i>NEST™</i> Drip Pad 24 in. x 36 in./61 cm. x 91 cm. (Medium)	8 lbs./3.6 kg.	2 gal./7.6 L
T8341RP 5 pack	Spill <i>NEST™</i> Drip Pad Replacement Pads (Medium)	9 lbs./4.1 kg.	2 gal./7.6 L
T8342	Spill <i>NEST™</i> Drip Pad 24 in. x 54 in./61 cm. x 137 cm. (Large)	9 lbs./4.1 kg.	3 gal./11.4 L
T8342RP 5 pack	Spill <i>NEST™</i> Drip Pad Replacement Pads (Large)	12 lbs./5.4 kg.	3 gal./11.4 L
T8343	Spill <i>NEST™</i> Drip Pad 38 in. x 42 in./96 cm. x 107 cm. (X-Large)	9 lbs./4.1 kg.	4 gal./15.1 L
T8343RP 5 pack	Spill NEST™ Drip Pad Replacement Pads (X-Large)	16.5 lbs./7.5 kg.	4 gal./15.1 L
T8360	Spill $NEST^{M}$ XT Off-Road Drip Pad w/ Grommets 3 ft. x 3 ft./.91 m. x .91 m.	12 lbs./5.4 kg.	4 gal./15.1 L
T8360RP 5 pack	Spill <i>NEST™</i> XT Off-Road Drip Pad Replacement 3 ft. x 3 ft./.91 m x .91 m.	17 lbs./7.7 kg.	4 gal./15.1 L
T8361	Spill <i>NEST™</i> XT Off-Road Drip Pad w/ Grommets 3 ft. x 6 ft./.91 m. x 1.83 m.	15 lbs./6.8 kg.	10 gal./37.9 L
T8361RP 5 pack	Spill <i>NEST™</i> XT Off-Road Drip Pad Replacement 3 ft. x 6 ft./.91 m. x 1.83 m.	34 lbs./15.4 kg.	10 gal./37.9 L
T8362	Spill <i>NEST™</i> XT Off-Road Drip Pad w/ Grommets 4 ft. x 4 ft./1.22 m. x 1.22 m.	19 lbs./8.6 kg.	8 gal./30.3 L
T8362RP 5 pack	Spill <i>NEST™</i> XT Off-Road Drip Pad Replacement 4 ft. x 4 ft./1.22 m. x 1.22 m.	32 lbs./14.5 kg.	8 gal./30.3 L
T8363	Spill <i>NEST</i> ™ XT Off-Road Drip Pad w/ Grommets 4 ft. x 5 ft./1.22 m. x 1.52 m.	21 lbs./9.5 kg.	12 gal./45.4 L
T8363RP 5 pack	Spill <i>NEST™</i> XT Off-Road Drip Pad Replacement 4 ft. x 5 ft./1.22 m. x 1.52 m.	35 lbs./15.9 kg.	12 gal./45.4 L

Eagle Talon™ Spill Berm

The Eagle Talon™ Spill Berm is a lightweight, portable berm constructed of yellow vinyl-coated polyester. Available in seven sizes.

- Snap-up supports
- Folds for compact storage and transport
- Unique and sturdy supports
- Excellent for decontamination applications
- Great addition to a Spill Kit
- Chemical resistant
- Made in the USA
- Constructed of
- **PVC Coated Fabric**



Eagle Spill*NEST*[™] Drip Pads

Eagle Spill NEST™ Drip Pads are used for leaks. Designed to be used as a durable, portable drip pad. Made in the USA.









Eagle Talon™ Drive-In & Drive-Out

The Eagle Talon™ Drive-In and Drive-Out Spill Berm allows the user to drive in and out without having to lower the end walls. Fuel and chemical resistant.

- Ideal for fuel use
- Constructed of XR5 Fabric
- Easy to assemble
- Lap joint welds for maximum strength
- Design permits quick deployment
- Additional sizes available
- Made in the USA

Ground Pads and Track Mats are available for additional protection. See page 51.





Ser and Model T8430DR Shown with Ground Pad, Track Mat and Tie Down Straps

Model No.	Description	Weight	Spill Capacity	Compliance
T8430DR	Talon™ Drive-In & Drive-Out Berm 12 ft. x 18 ft. x 1 ft./3.66 m. x 5.49 m. x 30 cm.	120 lbs. 54.4 kg.	1,615 gal. 6,113 L	N/A
T8432DR	Talon™ Drive-In & Drive-Out Berm 10 ft. x 26 ft. x 1 ft./3.05 m. x 7.92 m. x 30 cm.	142 lbs. 64.4 kg.	1,944 gal. 7,359 L	
T8437DR	Talon™ Drive-In & Drive-Out Berm 12 ft. x 36 ft. x 1 ft./3.66 m. x 10.97 m. x 30 cm.	198 lbs. 89.8 kg.	3,231 gal. 12,231 L	€ SPCC
T8440DR	Talon™ Drive-In & Drive-Out Berm 14 ft. x 54 ft. x 1 ft./4.27 m. x 16.46 m. x 30 cm.	252 lbs. 114.3 kg.	5,654 gal. 21,403 L	NPDES
T8441DR	Talon™ Drive-In & Drive-Out Berm 12 ft. x 60 ft. x 1 ft./3.66 m. x 18.29 m. x 30 cm.	293 lbs. 132.9 kg.	5,385 gal. 20,384 L	≎EPA
T8443DR	Talon™ Drive-In & Drive-Out Berm 14 ft. x 85 ft. x 1 ft./4.27 m. x 25.91 m. x 30 cm.	475 lbs. 215.5 kg.	8,901 gal. 33,694 L	

Eagle Spill NEST™ Rail Containment

Eagle Spill NEST™ Rail Containment provides portable spill containment and control for bottom loading and unloading rail tank cars. The lightweight containment berm (80 lbs./36.29 kg.) is designed to provide a temporary berm containment area around the valves below a rail tank car.



d the	B
	- 3
	Ea
	The

Model T8610

Eagle Spill*NEST*[™]Containment Pools

The Eagle Spill $NEST^{\infty}$ Containment Pool offers excellent resistance to the widest range of chemicals, acids, fuels and other hazardous materials. This lightweight design is durable and fits easily into spill response kits.

Model No.	Description	Capacity	Color	Compliano
T8460RB	Spill <i>NEST</i> ™ Rail Berm 4 ft. x 6 ft. x 1 ft./ 1.22 m. x 1.83 m. x 30 cm.	120 gal. 454.25 L	Black	
T8470RM	Rail Containment Mats Interior: 56 in. x 35 ft., Exterior: 16 in. x	x 35 ft.	Black	⊕EPA

Model No.	Description	Color	Weight	Compliance
T8610	20 gal./75.7 L Spill <i>NEST™</i> Pool	Yellow	2 lbs./.9 kg.	O BRCC
T8611	66 gal./249 L Spill <i>NEST™</i> Pool	Yellow	4 lbs./1.8 kg.	
T8601	100 gal./379 L Spill <i>NEST™</i> Pool	Yellow	4 lbs./1.8 kg.	NPDES
T8612	150 gal./568 L Spill <i>NEST™</i> Pool	Yellow	5 lbs./2.3 kg.	⊕EPA

Drip*NEST*[™] Hose Wraps

The Eagle Drip NEST™ Hose Wraps are made of durable and chemically resistant materials with an integrated sorbent pad. The Hose Wrap can absorb leaks from hoses and fittings from 2 in. to 10 in. (5 cm. x 24 cm.) in size.

Model No.	Description	Color	Weight	Compliance
T8381	25 oz. Drip <i>NEST™</i> Hose Wrap 2 in 3 in./5 cm 8 cm.	Yellow	8 oz. .23 kg.	.≙. SPCC
T8382	25 oz. Drip <i>NEST™</i> Hose Wrap 4 in 5 in./10 cm 13 cm.	Yellow	1 lb. .45 kg.	
T8383	25 oz. Drip <i>NEST™</i> Hose Wrap 6 in 8 in./15 cm 20 cm.	Yellow	1 lb. .45 kg.	NPDES
T8384	25 oz. Drip <i>NEST™</i> Hose Wrap 10 in./25.4 cm.	Yellow	3 lbs. 1.4 kg.	⇔EPA

Drip*NEST™* Maintenance Blanket

The Eagle Drip*NEST*™Maintenance Blanket is designed to be used under vehicles or leaking equipment. Made of a non-woven geo-textile that is backed by a layer of furl/chemical-resistant polyethylene. The blanket provides a protective sorbent pad between the maintenance item and placement area. Can be rolled or folded into a compact lightweight unit. (See image on pg. 55.)

Model No.	Description	Color	Weight	Compliance
T8390	Drip <i>NEST™</i> Maintenance Blanket 3 ft. x 12 ft./122 cm. x 365 cm.	Y/BLK	5 lbs./ 2.3 kg.	_ SPCC
T8391	Drip <i>NEST™</i> Maintenance Blanket 6 ft. x 12 ft./183 cm. x 365 cm.	Y/BLK	11 lbs./ 5.0 kg.	- COLONIARY
T8392	Drip <i>NEST™</i> Maintenance Blanket 9 ft. x 12 ft./244 cm. x 365 cm.	Y/BLK	16 lbs./ 7.3 kg.	NPDES
T8393	Drip <i>NEST™</i> Maintenance Blanket 12 ft. x 12 ft./365 cm. x 365 cm.	Y/BLK	21 lbs./ 9.5 kg.	≎EPA

Eagle Spill*NEST*™Decon Pools

The Eagle Spill NEST™ Decon Pool is an inexpensive and quick deployment pool that is small enough to be stored on any truck or emergency response vehicle. (For reuse or discard according to regulations).

The Eagle Spill NEST™ Decon Pool has an excellent puncture, abrasion and chemical resistance along with - 60° F cold crack resistance. This lightweight design is resistant to a wide range of chemicals, is 8 in. (20.32 cm.) tall and only takes seconds to set up. (Optional drain)

Drip NEST™ Hose Bibbs

Model T8380

The Eagle Drip*NEST*[™] Hose Bibb safely wraps quick-disconnect fittings or other hose attachment ends to absorb small leaks when disconnecting hoses from industrial equipment. Integrated internal sorbent allows for containment of up to 1 pint of oil, hydraulic fluid or other hydrocarbons.

Model No.	Description	Color	Weight	Compliance
T8380	Drip <i>NEST™</i> Hose Bibb	Yellow	8 oz. 237 mL.	A Marrie
T8380BX	Drip <i>NEST™</i> Hose Bibb (5 pack)	Yellow	8 oz. 237 mL. (5)	⊕EPA

Eagle Drip*NEST*™Leak Diverter

Eagle DripNEST[™] Leak Diverters provide an instant drip diversion. Available in various sizes, this funnel style diverter will channel away liquids to minimize the risk of injuries, property damage and contamination. Flow rate: 3 gal. per minute. Includes a garden hose connector with cap for easy set up. Made in the USA.

Model No.	Description	Color	Weight
T8301	Drip <i>NEST</i> ™Leak Diverter 3 ft. x 3 ft./91 cm. x 91 cm.	Yellow	2 lbs./9 kg.
T8302	Drip <i>NEST</i> ™ Leak Diverter 3 ft. x 6 ft./91 cm. x 183 cm.	Yellow	3.5 lbs./1.6 kg.
T8303	Drip <i>NEST™</i> Leak Diverter 3 ft. x 10 ft./91 cm. x 304 cm.	Yellow	5 lbs./2.3 kg.
T8304	Drip <i>NEST</i> [™] Leak Diverter 5 ft. x 5 ft./152 cm. x 152 cm.	Yellow	4 lbs./1.8 kg.
T8305	Drip <i>NEST™</i> Leak Diverter 6 ft. x 6 ft./183 cm. x 183 cm.	Yellow	5 lbs./2.3 kg.
T8306	Drip <i>NEST™</i> Leak Diverter 6 ft. x 10 ft./183 cm. x 304 cm	Yellow	7 lbs./3.2 kg.
T8307	Drip <i>NEST</i> ™ Leak Diverter 6 ft. x 12 ft./183 cm. x 366 cm.	Yellow	9 lbs./4.1 kg.
T8308	Drip <i>NEST™</i> Leak Diverter 10 ft. x 12 ft./304 cm. x 366 cm.	Yellow	9 lbs./4.1 kg.
T8309	Drip <i>NEST™</i> Leak Diverter 12 ft. x 12 ft./366 cm. x 366 cm.	Yellow	10 lbs./4.5 kg.
T8310	Drip <i>NEST</i> ™ Leak Diverter 12 ft. x 20 ft./366 cm. x 610 cm.	Yellow	13.5 lbs./6.1 kg.
T8311	Drip <i>NEST™</i> Leak Diverter 18 ft. x 18 ft./549 cm. x 549 cm.	Yellow	14 lbs./6.4 kg.
T8312	Drip <i>NEST</i> ™Leak Diverter 24 ft. x 24 ft./732 cm. x 732 cm.	Yellow	15 lbs./6.8 kg.

Model T830

Model T8602

Model No.	Description	Color	Weight	
T8602	100-Gallon (378.5 L) Spill <i>NEST™</i> Decon Pool	Yellow	5 lbs./2.3 kg.	EPA 40 CFR 264.175, SPCC, NPDES
T8602D	100-Gallon (378.5 L) Spill NEST™ Decon Pool with drain	Yellow	5 lbs./2.3 kg.	EPA 40 CFR 264.175, SPCC, NPDES









Eagle Storm*NEST*™ Storm Water Control Basin Inserts

The Eagle Storm NEST™Storm Water Control adjustable catch basin inserts to help with NPDES, 40 CFR 122.26 compliance of Stormwater Pollution Prevention Plans when used as Best Management Practices. Designed to protect storm drains and sewers from debris and sediments. Available with or without oilabsorbent bag. Made in the USA.

- Available in rectangular or round designs
- Rectangular models designed to fit catch basins from 16 in. x 20 in. to 42 in. x 42 in.
- Round model designs fit catch basins from 27 in. to 29 in. in diameter
- All models available with or without oil-absorbent feature
- Requires no special tools to install and remove
- Overflow rate of up to 500 gpm helps avoid ponding

Model No.	Description	Weight		Compliance
T8701	500 gpm Basin Insert-Sediment, Round Adjustable 24 in 26 in./61 cm 66 cm Black	2 lbs./.9 kg.		
T8701B	500 gpm Catch Basin Insert - Sediment-Oils, Round 24 in 26 in./61 cm 66 cm Black	2 lbs./.9 kg.	Helps With NPDES, 40 CFR 122.26	≗ SPCC
T8702	500 gpm Catch Basin Insert - Rectangle Adjustable 16 in. x 20 in./41 cm. x 51 cm. to 28 in. x 38 in./71 cm. x 96 cm Black	2 lbs./.9 kg.		No.
T8702B	500 gpm Catch Basin Insert - Sediment-Oils, Rectangle Adjustable 16 in. x 20 in./41 cm. x 51 cm., 28 in. x 38 in./71 cm. x 96 cm Black	2 lbs./.9 kg.		NPDES
T8702XL	500 gpm Catch Basin Insert - Sediment, Rectangle XL Adjustable 25 in 42 in./63.5 cm 107 cm Black	3 lbs./1.4 kg.		
T8702XLB	500 gpm Catch Basin Insert - Sediment-Oils, Rectangle XL 25 in 42 in./63.5 cm 107 cm Black	3 lbs./1.4 kg.		⊕EPA
T8711	500 gpm Drain Dam (2/Pkg) - Black	6 lbs./2.7 kg.	Helps With	
T8712	500 gpm Curb Inlet Insert - Sediment - Black	3 lbs./1.4 kg.	NPDES, 40 CFR 122.26	<u>interni</u> ∰ ⇔EPA
T8713	500 gpm Inlet Insert - Sediment No Frame 36 in. x 48 in./91 cm. x 122 cm Black	2 lbs./.9 kg.		
T8713B	500 gpm Inlet Insert - Sediment-Oils No Frame 36 in. x 48 in./91 cm. x 122 cm Black	2 lbs./.9 kg.	Helps With	
T8714	500 gpm Inlet Insert - Sediment No Frame 60 in. x 60 in./152 cm. x 152 cm Black	3 lbs./1.4 kg.	NPDES, 40 CFR 122.26	Corner
T8714B	500 gpm Inlet Insert - Sediment-Oils No Frame 60 in. x 60 in./152 cm. x 152 cm Black	3 lbs./1.4 kg.		⊕EPA

ance





Eagle Drain Covers

Eagle Drain Covers are durable and chemically resistant. Drain Covers help create a barrier helping to prevent liquids from reaching the drain.

- Available in four sizes
- Easy to use
- Easy to clean
- Reusable
- 100 percent Polyurethane Elastomer

Model No.	Description	Color	Weight	Complia
T8721	Drain Cover 18 in. x 18 in./46 cm. x 46 cm.	Red	7 lbs./3.2 kg.	<u>Q</u> and
T8722	Drain Cover 24 in. x 24 in./61 cm. x 61 cm.	Red	10 lbs./4.5 kg.	
T8723	Drain Cover 36 in. x 36 in./91 cm. x 91 cm.	Red	15 lbs./6.8 kg.	NPDE
T8724	Drain Cover 48 in. x 48 in./122 cm. x 122 cm.	Red	19 lbs./8.6 kg.	≎EP



BERM ACCESSORIES



Berm Repair Kits

Fix or repair your damaged berm with a Berm Repair Kit. Standard option is available for a quick-fix or Deluxe for everything needed to get your job back up and running.



Hose Bridge

Connect containment sumps without damaging sidewalls with the convenient hose bridge.


BERM REPAIR KIT

Model	Description	Ship Weight
82BRK	Berm Repair Kit - Black	1 lb./.45 kg.
82BRKD12	Deluxe Berm Repair Kit -12 in./30 cm Black	15 lbs./6.8 kg.
82BRKD8	Deluxe Berm Repair Kit - 8 in./20 cm Black	15 lbs./6.8 kg.

HOSE BRIDGE

Model	Description	Ship Weight
82BRIDGE	Hose Bridge	38 lbs./17.2 kg.

TRACK MATS



Track Mats for the Eagle Talon™ Series Berms

When used inside the Eagle Talon™ Series Berms, this mat allows trucks to drive in and drive out while helping protect the berm from punctures and tears. Available in sizes to match 6 ft. x 6 ft. (1.82 m. x 1.82 m.) and larger Eagle Talon™ Berms.

	Model	Description	Ship Weight	Compliance
,	T8427TM	Track Mat For 6 ft. x 6 ft./1.83 m. x 1.83 m. Berm - Black	24 lbs./10.9 kg.	
	T8429TM	Track Mat For 10 ft. x 10 ft./3.05 m. x 3.05 m. Berm - Black	40 lbs./18.1 kg.	
	T8430TM	Track Mat For 12 ft. x 12 ft./3.66 m. x 3.66 m. Berm - Black	48 lbs./21.8 kg.	
	T8431TM	Track Mat For 16 ft. x 16 ft./4.88 m. x 4.88 m. Berm - Black	64 lbs./29.0 kg.	# RE-04
	T8432TM	Track Mat For 10 ft. x 26 ft./3.05 m. x 7.92 m. Berm - Black	84 lbs./38.1 kg.	
'n	T8437TM	Track Mat For 12 ft. x 36 ft./3.66 m. x 10.97 m. Berm (2, 3 ft. x 36 ft.) - Black	144 lbs./65.3 kg.	-
1	T8439TM	Track Mat For 15 ft. x 50 ft./4.57 m. x 15.24 m. Berm (2, 3 ft. x 50 ft.) - Black	200 lbs./90.7 kg.	(Arough
	T8440TM	Track Mat For 14 ft. x 54 ft./4.27 m. x 16.46 m. Berm (2, 3 ft. x 54 ft.) - Black	216 lbs./98.0 kg.	≎EPA
	T8441TM	Track Mat For 12 ft. x 60 ft./3.66 m. x 18.29 m. Berm (2, 3 ft. x 60 ft.) - Black	223 lbs./101 kg.	VLIA
	T8442TM	Track Mat For 14 ft. x 66 ft./4.27 m. x 20.17 m. Berm (2, 3 ft. x 66 ft.) - Black	263 lbs./119 kg.	
	T8443TM	Track Mat For 14 ft. x 85 ft./4.27 m. x 25.91 m. Berm (2, 3 ft. x 85 ft.) - Black	340 lbs./154 ka.	

Storage and Transport Bag

Heavy duty, durable and chemicalresistant storage and transport bag for ease and storage of Eagle Talon™ Berms.

STORAGE AND TRANSPORT RAGS

Model	Description	Ship Weight	Compliance
T8429BAG	Storage & Transport Bag - Up To 10 ft. x 10 ft./3.05 m. x 3.05 m Black	15 lbs./6.8 kg.	
T8431BAG	Storage & Transport Bag - Up To 16 ft. x 16 ft./4.88 m. x 4.88 m Black	15 lbs./6.8 kg.	2,1000
T8432BAG	Storage & Transport Bag - Up To 10 ft. x 26 ft./3.05 m. x 7.92 m Black	17 lbs./7.7 kg.	
T8437BAG	Storage & Transport Bag - Up To 12 ft. x 36 ft./3.66 m. x 10.97 m Black	21 lbs./9.5 kg.	≎EPA
T8440BAG	Storage & Transport Bag - Up To 14 ft. x 54 ft./4.27 m. x 16.46 m Black	27 lbs./12.2 kg.	

Ground Pad When used under the Eagle Talon™

Series Berms, the ground pad helps protect berms from truck wheels and rough terrain. Place directly on the ground under the Eagle Talon™ Berm to guard against underside punctures.

GROUND PADS

Model	Description	Ship Weight
T8424GP	Ground Pad For 4 ft. x 6 ft./1.21 m. x 1.83 m. Berm - Black	5 lbs./2.3 kg.
T8427GP	Ground Pad For 6 ft. x 6 ft./1.82 m. x 1.83 m. Berm - Black	22 lbs./10 kg.
T8429GP	Ground Pad For 10 ft. x 10 ft./3.05 m. x 3.05 m. Berm - Black	38 lbs./17.2 kg.
T8430GP	Ground Pad For 12 ft. x 12 ft./3.66 m. x 3.65 m. Berm - Black	30 lbs./13.6 kg.
T8431GP	Ground Pad For 16 ft. x 16 ft./4.88 m. x 4.87 m. Berm - Black	55 lbs./24.9 kg.
T8432GP	Ground Pad For 10 ft. x 26 ft./3.05 m. x 7.92 m. Berm - Black	57 lbs./25.9 kg.
T8437GP	Ground Pad For 12 ft. x 36 ft./3.66 m. x 10.97 m. Berm - Black	92 lbs./41.7 kg.
T8439GP	Ground Pad For 15 ft. x 50 ft./4.57 m. x 15.24 m. Berm - Black	104 lbs./47.2 kg.
T8440GP	Ground Pad For 14 ft. x 54 ft./4.27 m. x 16.45 m. Berm - Black	124 lbs./56.2 kg.
T8441GP	Ground Pad For 12 ft. x 60 ft./3.66 m. x 18.29 m. Berm - Black	124 lbs./56.2 kg.
T8442GP	Ground Pad For 14 ft. x 66 ft./4.27 m. x 20.17 m. Berm - Black	140 lbs./63.5 kg.
T8443GP	Ground Pad For 14 ft. x 85 ft./4.27 m. x 25.91 m. Berm - Black	260 lbs./117.9 kg.





Head and Salvage Drums. The 14- (53 L), 20- (75.7 L) 30- (113.6 L) and 55-gallon (208.2 L) Lab Packs and 14- (53 L), 20- (75.7 L), 30- (113.6 L), 55- (208.2 L), 65high-density polyethylene (HDPE) with UV inhibito are durable and lightweight and available in yellow blue and black. All of our products are 100 percent

All drums feature:

- Blow-molded HDPE construction
- Chemical & weather resistant
- HDPE incinerates completely
- United Nations (UN) Certified to HM-181
- Operating temperature range (-40° F/-34° C to 140° F/54° C)
- Drop tested max weight at 0° F/-17° C (48 hrs.)
- Approved for use with Packing Groups I, II and III
- UV Protection Package
- UL 94HB Flammability Rating
- Nestable for ideal storage (except model 1656)
- FDA 21 CFR 177.1520 Food Grade Quality
- Stack tested three high at maximum weight capacity (24 hrs.)

Eagle drums are ideal for:

- Safe storage, handling and transportation of hazardous materials
- Spill containment and cleanup of hazardous materials
- Spill kit containers
- Original shipping containers
- Biowaste disposal and incineration







10 GALLON DRUMS

		CLASSIC BAND		METAL	. BAND	BOLT RING
Model Numbers	1609	1609BLK	1609B	1609M	1609MB	1609MBBR
Style	Lab Pack Open Head Drum					
Closure Type	Plastic Band	Plastic Band	Plastic Band	Metal Band	Metal Band	Metal Bolt Ring
Inside Bottom: Dimensions Height:	14¼ in./35.9 cm. 12¾ in./31.4 cm. 18 in./45.7 cm.	14½ in./35.9 cm. 12¾ in./31.4 cm. 18 in./45.7 cm.	14¼ in./35.9 cm. 12¾ in./31.4 cm. 18 in./45.7 cm.	14¼ in./35.9 cm. 12¾ in./31.4 cm. 18 in./45.7 cm.	14½ in./35.9 cm. 12¾ in./31.4 cm. 18 in./45.7 cm.	14½ in./35.9 cm. 12¾ in./31.4 cm. 18 in./45.7 cm.
Outside Bottom: Dimensions Height:	15 in./38.1 cm. 12¾ in./32.4 cm. 18⅓ in./46.5 cm.					
Maximum Capacity	133 lbs. 60 kg.					
Total Capacity	10 gal. 38 L					
Maximum Container Size (If used as an overpack drum)	5 gal. 18.9 L					
Weight	7.5 lbs. 3.4 kg.					
Pallet Quantity	81	81	81	81	81	81
Truckload Quantity	1,404	1,404	1,404	1,404	1,404	1,404
UN/DOT Rating	1H2/Y60/S	1H2/Y60/S	1H2/Y60/S	1H2/X60/S 1H2/Y75/S	1H2/X60/S 1H2/Y75/S	1H2/X60/S 1H2/Y75/S



Eagle 10-Gallon Poly Drum

Eagle's NEW 10 Gallon Lab Pack / Open Head Drum is blow molded with durable high-density polyethylene (HDPE) for maximum performance and quality. The HDPE is chemical and weather resistant and includes a UV protection package. Available in Yellow, Blue, Black or Natural HDPE, with plastic or metal lever lock, or metal bolt ring. 100 percent made in the USA.

- Constructed of durable HDPE
- Nestable storage to optimize shipping and storage space
- Plastic or Metal Lever Locking Bands, or Bolt Ring
- FDA 21 CFR 177.1520 Food Grade Quality
- Operating Temp range (-30° F to 130° F)
- Drop tested-max weight @ 0° F (48hrs)
- UL 94HB Flammability Rating





14 GALLON DRUMS 20 GALLON DRUMS

BUNG LID / BOLT RING OPTIONS Available for Some Models

NEW! NATURAL COLORS Available for Some Models





















Model Numbers Bung Lid Models	1610	1610BLK	1610M 1610MBGI	1610MB 1610MBBGI	1610MBLK 1610MBKBGI	1652	1654	1623	1623BLK	1623M
Style	Lab Pack Open Head Drum	Lab Pack	Salvage Drum	Lab Pack Open Head Drum	Lab Pack Open Head Drum	Lab Pack Open Head Drum				
Closure Type	Plastic Lever-Lock	Plastic Lever-Lock	Metal Lever-Lock	Metal Lever-Lock	Metal Lever-Lock	Plastic Lever-Lock	Metal Lever-Lock	Plastic Lever-Lock	Plastic Lever-Lock	Metal Lever-Lock
Inside Bottom: Dimensions Height:	13½ in./34.3 cm. 12½ in./31.4 cm. 25 in./63.5 cm.	13½ in./34.3 cm. 12¾ in./31.4 cm. 25 in./63.5 cm.	19 in./48.3 cm. 16‰ in./41.4 cm. 19 in./48.3 cm.	19 in./48.3 cm. 16‰ in./41.4 cm. 19 in./48.3 cm.	15% in./39 cm. 12% in./32.7 cm. 29% in./75.9 cm.	15¾ in./39 cm. 12¼ in./32.7 cm. 29¼ in./75.9 cm.	15% in./39 cm. 12% in./32.7 cm. 29% in./75.9 cm.			
Outside Bottom: Dimensions Height:	15 in./38.1 cm. 12¾ in./32.4 cm. 26½ in./67.3 cm.	15 in./38.1 cm. 12¾ in./32.4 cm. 26½ in./67.3 cm.	15 in./38.1 cm. 12% in./32.4 cm. 26% in./67.3 cm.	15 in./38.1 cm. 12¾ in./32.4 cm. 26½ in./67.3 cm.	15 in./38.1 cm. 12¾ in./32.4 cm. 26½ in./67.3 cm.	20% in./53 cm. 16¹%ն in./42.4 cm. 20%ն in./51.9 cm.	20⅓ in./53 cm. 16¹⅓ in./42.4 cm. 20⅓ in./51.9 cm.	15¾ in./40 cm. 13¼ in./33.7 cm. 30½ in./77.5 cm.	15¾ in./40 cm. 13¼ in./33.7 cm. 30½ in./77.5 cm.	15¾ in./40 cm. 13¼ in./33.7 cm. 30½ in./77.5 cm.
Maximum Capacity	143 lbs. 65 kg.	143 lbs. 65 kg.	220 lbs. 100 kg.	220 lbs. 100 kg.	220 lbs. 100 kg.	88 lbs. 40 kg.	165 lbs. 75 kg.	220 lbs. 100 kg.	220 lbs. 100 kg.	220 lbs. 100 kg.
Total Capacity	14 gal. 52.2 L	20 gal. 77 L	20 gal. 77 L	20 gal. 77 L	20 gal. 77 L	20 gal. 77 L				
Maximum Container Size (If used as an overpack drum)	5 gal. 18.9 L	5 gal. 18.9 L	5 gal. 18.9 L	5 gal. 18.9 L	5 gal. 18.9 L					
Weight	9 lbs. 3.6 kg.	9 lbs. 3.6 kg.	10 lbs. 4.1 kg.	10 lbs. 4.1 kg.	10 lbs. 4.1 kg.	15 lbs. 5.85 kg.	16 lbs. 6.75 kg.	10.25 lbs. 4.65 kg.	10.25 lbs. 4.65 kg.	11.5 lbs. 5.2 kg.
Pallet Quantity	54	54	54	54	54	40	40	42	42	42
Truckload Quantity	1,404	1,404	1,404	1,404	1,404	1,000	1,000	1,092	1,092	1,092
UN/DOT Rating	1H2/X65/S 1H2/Y100/S	1H2/X65/S 1H2/Y100/S	1H2/X65/S 1H2/Y100/S	1H2/X65/S 1H2/Y100/S	1H2/X65/S 1H2/Y100/S	1H2/X40/S	1H2/X75/S	1H2/X75/S 1H2/Y100/S	1H2/X75/S 1H2/Y100/S	1H2/X75/S 1H2/Y100/S



Lab Packs/Open Head — for use with smaller non-damaged bottles, cans, carboys and 5-gallon (18.9 L) pails of non-leaking hazardous materials — if leaking, must pack with sufficient sorbents — NO FREE LIQUIDS.

Salvage Drums – for use with damaged or leaking containers of hazardous materials or used absorbent materials contaminated with a hazardous substance. Require "Salvage Drum" labeling and must pass a 3-PSI pressure test.

Regulatory Compliance:Lab Packs/Open Head: DOT 49 CFR 173.12 / Overpacks: DOT 49 CFR 173.25
Salvage Drums: DOT 49 CFR 173.3

Overpacks – for use with larger non-damaged containers, cans and drums of non-leaking hazardous materials – if leaking, must pack with sufficient sorbents – NO FREE LIQUIDS.

compliance, 4990 -Testing Agency number







20 GALLON DRUMS 30 GALLON DRUMS 40 GALLON DRUMS

BUNG LID / BOLT RING OPTIONS Available for 30 Gallon Eagle Models























Model Numbers	1623MB	1623MBLK	1601	1601BLK	1601 M 1601MBG2 <i>or</i>	1601MB	1601MBLK	1602	1651	1651MB
Bung Lid Models	10201110	TOZOWIDZIK	1001	1601BLKBG	1601BLKBRBG2	1601MBBBG <i>or</i> 1601MBBG2	1601MBLKBG or 1601MBKBG2	1002	AVAILABLE IN	BLACK 1651MBLK
Style	Lab Pack Open Head Drum	Salvage Drum	Lab Pack Open Head Drum	Lab Pack Open Head Drum						
Closure Type	Metal Lever-Lock	Metal Lever-Lock	Plastic Lever-Lock	Plastic Lever-Lock	Metal Lever-Lock	Metal Lever-Lock	Metal Lever-Lock	Metal Lever-Lock	Metal Lever-Lock	Metal Lever-Lock
Inside Top: Dimensions Height:	15% in./39 cm. 12% in./32.7 cm. 29% in./75.9 cm.	15% in./39 cm. 12% in./32.7 cm. 29% in./75.9 cm.	19 in./48.3 cm. 16¼ in./41.3 cm. 26¾ in./67 cm.	19 in./48.3 cm. 16¼ in./41.3 cm. 26¾ in./67 cm.	19 in./48.3 cm. 16½ in./41.3 cm. 26¾ in./67 cm.	19 in./48.5 cm. 16¼ in./41.3 cm. 26¾ in./67 cm.	19 in./48.5 cm. 16¼ in./41.3 cm. 26¾ in./67 cm.	19 in./48.5 cm. 16¼ in./41.3 cm. 26¾ in./67 cm.	22½ in./58.1 cm. 18¾ in./48.3 cm. 29¾6 in./98 cm.	22½ in./58.1 cm. 19 in./48.3 cm. 38% in./98 cm.
Outside Top: Dimensions Height:	15¾ in./40 cm. 13¼ in./33.7 cm. 30½ in./77.5 cm.	15¾ in./40 cm. 13¼ in./33.7 cm. 30½ in./77.5 cm.	21½ in./54 cm. 16½ in./42.2 cm. 28½ in./72.4 cm.	21½ in./54 cm. 16% in./42.2 cm. 28½ in./72.4 cm.	23¾ in./60.3 cm. 19¼ in./49.2 cm. 30¼ in./99.4 cm.	23¼ in./60.3 cm. 19½ in./48.6 cm. 30½ in./77.2 cm.				
Maximum Capacity	220 lbs. 100 kg.	220 lbs. 100 kg.	220 lbs. 100 kg.	220 lbs. 100 kg.	396 lbs. 180 kg.	396 lbs. 180 kg.	396 lbs. 180 kg.	396 lbs. 180 kg.	To Be Determined	To Be Determined
Total Capacity	20 gal. 77 L	20 gal. 77 L	30 gal. 114 L	30 gal. 114 L	30 gal. 114 L	30 gal. 114 L	30 gal. 114 L	30 gal. 114 L	40 gal. 151.4 L	40 gal. 151.4 L
Maximum Container Size (If used as an overpack drum)	5 gal. 18.9 L	5 gal. 18.9 L	16 gal. 60.6 L	16 gal. 60.6 L	16 gal. 60.6 L	16 gal. 60.6 L	16 gal. 60.6 L	16 gal. 60.6 L	30 gal. 113.6 L	30 gal. 113.6 L
Weight	11.5 lbs. 5.7 kg.	11.5 lbs. 5.2 kg.	16 lbs. 6.3 kg.	18 lbs. 7.2 kg.	17 lbs. 7.7 kg.	17 lbs. 7.7 kg.				
Pallet Quantity	42	42	40	40	40	40	40	40	40	40
Truckload Quantity	1,092	1,092	1,000	1,000	1,000	1,000	1,000	1,000	1,000	1,000
UN/DOT Rating	1H2/X75/S 1H2/Y100/S	1H2/X75/S 1H2/Y100/S	1H2/X100/S 1H2/Y180/S	1H2/X100/S 1H2/Y180/S	1H2/X120/S 1H2/Y180/S	1H2/X120/S 1H2/Y180/S	1H2/X120/S 1H2/Y180/S	1H2/X120/S 1H2/Y180/S	To Be Determined	To Be Determined



Benefits of Blow-Molded HDPE Drums

HDPE is a very high molecular weight material, designed for an optimum balance of density, molecular weight and molecular weight distribution, demonstrating maximum property advantages for large products that require high impact resistance. Some of those advantages include: these advantages include:

- Environmental stress crack resistance (ESCR)
- Impact strength even at a low temperature

- Flexural modulus durability and resilience
- Chemical resistance to wide range of chemicals
 Abrasion resistance prevents gouging and scuffing
 Ultraviolet (UV) protection superior blending process
- Plain Lid with gasket to seal lid to drum with drum lever ring
- (lever rings come in powder-coated metal or HDPE plastic)

 Lid with two 2 in. (5.08 cm.) bung lids for drum pump straight thread connections
- Lid with one 2 in. (5.08 cm.) and one 3/4 in. (1.9 cm.) bung lids for drum pump straight thread connections

Lid Styles:

- Lids feature closed cell foam or silicone gaskets
- Lid closure instructions included in each drum
 Salvage Drums pass 3-PSI pressure test

SCREW TOP





55 GALLON DRUMS

BUNG LID / BOLT RING OPTIONS Available for 55 Gallon Eagle Models

NEW! NATURAL COLORS Available for Some Models





















100% Recyclable		
Model Numbers Bung Lid Models		
Style		
Closure Type		
Inside Dimensions	Top: Bottom: Height:	
Outside Dimensions	Top: Bottom: Height:	
Maximum Capacity		
Total Capacity		
Maximum Container Size (If used as an overpack drum)		
Weight		
Pallet Quantity		
Truckload Quantity		

8	Did you know?
83	Eagle HDPE poly drums

with screw tops or plastic lever-lock lid closures can be incinerated completely.

Lab Packs/Open Head — for use with smaller non-damaged bottles, cans, carboys and 5-gallon (18.9 L) pails of non-leaking hazardous materials — if leaking, must pack with sufficient sorbents — NO FREE LIQUIDS.



Overpacks – for use with larger non-damaged containers, cans and drums of non-leaking hazardous materials – if leaking, must pack with sufficient sorbents for – NO FREE LIQUIDS.

Regulatory Compliance: Lab Packs/Open Head: DOT 49 CFR 173.12 Overpacks: DOT 49 CFR 173.25 Salvage Drums: DOT 49 CFR 173.3

Model Numbers Bung Lid Models	1655	1655BLK	1655M 1655MBG	1655MB 1655MBBG	1655MBLK 1655MBLKBG	1656	1656BLK 1656BLKBG	1656M 1656MBG2	1656MB 1656MBBG2	1656MBLK 1656MBLKBG <i>or</i> 1656MBLKBG2
Style	Lab Pack Open Head Drum	Lab Pack Open Head Drum	Lab Pack Open Head Drum	Lab Pack Salvage Drum	Lab Pack	Lab Pack				
Closure Type	Plastic	Plastic	Metal	Metal	Metal	Plastic	Plastic	Metal	Metal	Metal
	Lever-Lock	Lever-Lock	Lever-Lock	Lever-Lock	Lever-Lock	Lever-Lock	Lever-Lock	Lever-Lock	Lever-Lock	Lever-Lock
Inside Top: Dimensions Bottom: Height:	22½ in./58.1 cm.	22% in./58.1 cm.	22½ in./58.1 cm.	22½ in./58.1 cm.	22½ in./58.1 cm.	201/6 in./51.2 cm.	20⅓ in./51.2 cm.	20½ in./51.2 cm.	201/ ₆ in./51.2 cm.	20½ in./51.2 cm.
	19 in./48.3 cm.	221/6 in./56.2 cm.	22⅓ in./56.2 cm.	22½ in./56.2 cm.	221⁄ ₈ in./56.2 cm.	22½ in./56.2 cm.				
	38% in./98 cm.	38% in./98 cm.	38‰ in./98 cm.	38‰ in./98 cm.	38½ in./98 cm.	3513/6 in./91 cm.	35⅓ in./91 cm.	35½ in./91 cm.	35 ¹³ ⁄ ₆ in./91 cm.	35½ in./91 cm.
Outside Top: Dimensions Height:	23¾ in./60.3 cm.	21 in./55.3 cm.	21 in./55.3 cm.	21 in./55.3 cm.	21 in./55.3 cm.	21 in./55.3 cm.				
	19¾ in./49.2 cm.	19% in./49.2 cm.	19% in./49.2 cm.	19¾ in./49.2 cm.	19¾ in./49.2 cm.	22½ in./57.2 cm.	22½ in./57.2 cm.	22½ in./57.2 cm.	22½ in./57.2 cm.	22½ in./57.2 cm.
	39¼ in./99.4 cm.	39% in./99.4 cm.	39% in./99.4 cm.	39¼ in./99.4 cm.	39¼ in./99.4 cm.	36¾ in./92.4 cm.	36¾ in./92.4 cm.	36¾ in./92.4 cm.	36¾ in./92.4 cm.	36¾ in./92.4 cm.
Maximum	220 lbs.	220 lbs.	551 lbs.	551 lbs.	551 lbs.	220 lbs.	220 lbs.	551 lbs.	551 lbs.	551 lbs.
Capacity	100 kg.	100 kg.	250 kg.	250 kg.	250 kg.	100 kg.	100 kg.	250 kg.	250 kg.	250 kg.
Total	55 gal.	55 gal.	55 gal.	55 gal.	55 gal.	55 gal.				
Capacity	212 L	217 L	217 L	217 L	217 L	217 L				
Maximum Container Size (If used as an overpack drum)	30 gal. 113.6 L	30 gal. 113.6 L	30 gal. 113.6 L	30 gal. 113.6 L	30 gal. 113.6 L	30 gal. 113.6 L				
Weight	23.5 lbs.	23.5 lbs.	23.5 lbs.	23.5 lbs.	23.5 lbs.	23.5 lbs.				
	10.7 kg.	10.7 kg.	10.7 kg.	10.7 kg.	10.7 kg.	10.7 kg.				
Pallet Quantity	36	36	36	36	36	8	8	8	8	8
Truckload Quantity	864	864	864	864	864	336 Not Palletized	336 Not Palletized	336 Not Palletized	336 Not Palletized	336 Not Palletized
UN/DOT Rating	1H2/X65/S	1H2/X65/S	1H2/X200/S	1H2/X200/S	1H2/X200/S	1H2/X100/S	1H2/X100/S	1H2/X200/S	1H2/X200/S	1H2/X200/S
	1H2/Y100/S	1H2/Y100/S	1H2/Y250/S	1H2/Y250/S	1H2/Y250/S	1H2/Y100/S	1H2/Y100/S	1H2/Y250/S	1H2/Y250/S	1H2/Y250/S
					888888					






	SCREW-TOP DRUMS					SALVAGE DRUMS	
		AVAILABLE IN BROWN 1600SLBRN					
HDPE 100% Recyclable							
Model Numbers Lid Model Numbers	1650	1600SL	1657	1661	1690	1665	1695
Style	Lab Pack	Lab Pack	Lab Pack	Overpack	Overpack	Salvage Drum	Salvage Drum
Closure Type	Screw-on lid	Metal ring w/bolt	Metal ring w/bolt				
Inside Top: Dimensions Bottom: Height:	19% in./49.3 cm. 16% in./41.6 cm. 20 in./50.8 cm.	19% in./50.5 cm. 16% in./41.3 cm. 27 in./68.6 cm.	23½ in./60.7 cm. 19 in./48.3 cm. 39½ in./99.7 cm.	27¼ in./68.9 cm. 25½ in./65.9 cm. 31¼ in./79.4 cm.	27½ in./68.9 cm. 25% in./65 cm. 39 in./99.1 cm.	27½ in./68.9 cm. 25½ in./64.8 cm. 35% in./91.2 cm.	27½ in./69.9 cm. 25½ in./64.2 cm. 38 in./96.6 cm.
Outside Top: Dimensions Bottom: Height:	20% in./51.8 cm. 16% in./42.6 cm. 20% in./52.7 cm.	22½ in./57.2 cm. 16% in./42.3 cm. 28¼ in./71.8 cm.	26½ in./67.4 cm. 19% in./49.3 cm. 40 in./101.6 cm.	31 in./78.8 cm. 26¼ in./67.2 cm. 33¼ in./85.8 cm.	31 in./78.8 cm. 26⅓ in./66.2 cm. 41¼ in./104.8 cm.	31 in./78.8 cm. 26 in./66.1 cm. 38% in./98.8 cm.	31 in./78.8 cm. 25¾ in./65.4 cm. 44¾ in./112.8 cm.
Maximum Capacity	125 lbs. 57 kg.	396 lbs. 180 kg.	551 lbs. 250 kg.	660 lbs. 300 kg.	660 lbs. 300 kg.	440 lbs. 200 kg.	748 lbs. 340 kg.
Total Capacity	20 gal. 76 L	30 gal. 114 L	55 gal. 217 L	65 gal. 247 L	95 gal. 361 L	65 gal. 247 L	95 gal. 361 L
Maximum Container Size (If used as an overpack drum)	5 gal. 18.9 L	16 gal. 60.6 L	30 gal. 113.6 L	30 gal. 113.6 L	55 gal. 208.2 L	55 gal. 208.2 L	55 gal. 208.2 L
Weight	13 lbs. 5.85 kg.	18 lbs. 6.3 kg.	28 lbs. 6.3 kg.	45 lbs. 20.25 kg.	50 lbs. 22.5 kg.	53 lbs. 23.85 kg.	58 lbs. 26.1 kg.
Pallet Quantity	24	24	5	3	3	4	4
Truckload Quantity	528	720	332	180	180	192	192
UN/DOT Rating	1H2/X57/S	1H2/X120/S 1H2/Y180/S	1H2/X200/S 1H2/Y250/S	1H2/X300/S	1H2/X300/S	1H2/X200/S	1H2/X340/S
	SCREW TOP		METAL RING W/BOLT			UN Markings: UN 1H2/X: 1- Type of Container (drur head/X-Testing performan	340/S/96USA/M4990 n), H-material of construction (plastic), 2-Removable nce (X=Groups I, II, & III), 340-Max. Wt. of Container Manufacture, USA-State Authorization Mark/M -
	33,1217-101	1-4	IVILIALINING VY DOLI	SPCC	Model 1609	(Kg)/S-solids/96/Year of N certification compliance,	Manufacture, USA-State Authorization Mark/M - 4990-Testing Agency number.

60 sales@eagle-mfg.com eagle-mfg.com 61





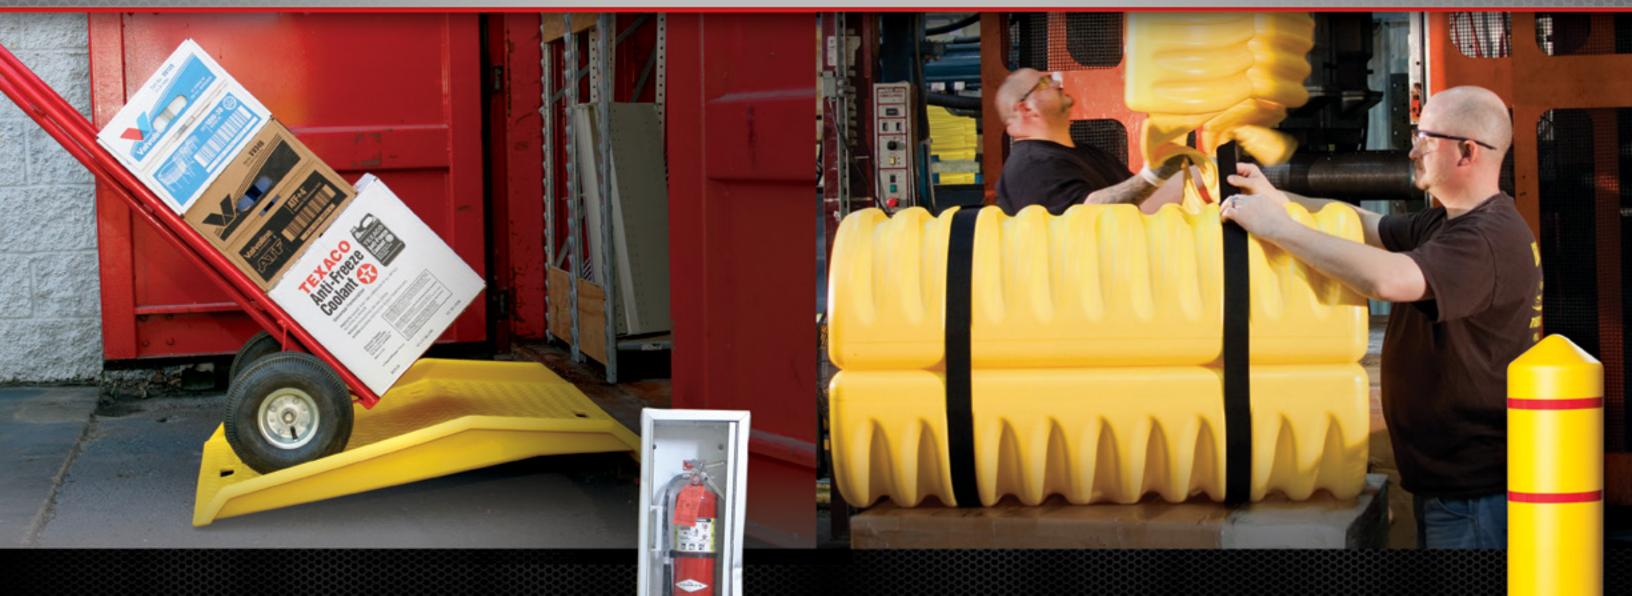

Eagle Manufacturing has offered affordable protection for warehouses, plants, factories, stores and other facilities for more than 20 years. From column protection to maintenance-free post-sleeves to ramps and dockplates, Eagle has the Compliance Solutions to help keep your facility protected. Our Material Handling products are designed to meet your specific needs, and are 100 percent made in the USA.



Multiple products for Material Handling and Facility Protection:

- HDPE Bollard Post Sleeves
- Bollard Posts & Machine Guards
- Wall & Corner Protectors
- Protective Parking Stops
- Poly Guide-Post Delineators
- Safety Clearance Bars
- Decorative Post Sleeves
- Portable & Fixed Dockplates
- I ditable & likea book
- Column Protectors
- Lightweight Poly Curb Ramp
- Lightweight Shipping Container Ramp





GUARDS & PROTECTORS

Bollard Posts and Machine Guards

Bollard Posts add protection to your facility and prevent damage. Posts feature a durable baked-on powder coat in safety vellow to provide high visibility. Each post is made of 1/4 in. (.63 cm.) thick (Schedule 40 or Schedule 10) steel mounted on 3/8 in. (.95 cm.) steel plates, pre-drilled holes (3/4 in./1.9 cm.) for easy installation. The black HDPE post caps are included and can be removed to fill posts with concrete for extra protection.

Machine Guards

Machine guards provide superior protection for facilities and equipment by creating barriers between traffic areas and your valuable machinery. Each guard is made of 1/8 in. (.32 cm.) thick Schedule 10 steel mounted on 3/8 in. (.95 cm.) steel plates, pre-drilled holes for easy installation.

	Во	llard P	osts - Schedule 40 a	and Schedule 10	
Model	Description	Sched.	Dimensions (ht x dia)	Plate Size	Weight
1742	4" Round Bollard Post	40	in: 24 x 4 ¹ / ₂ cm: 61 x 11.5	in: 8 x 8 x 3/8 cm: 20.4 x 20.4 x 1	35 lbs./15.9 kg.
174210	4" Round Bollard	10	in: 24 x 4½ cm: 61 x 11.5	in: 8 x 8 x 3/8 cm: 20.4 x 20.4 x 1	22 lbs./10 kg.
1743	4" Round Bollard Post	40	in: 36 x 4½ cm: 91.5 x 11.5	in: 8 x 8 x 3/8 cm: 20.4 x 20.4 x 1	45 lbs./20.5 kg.
174310	4" Round Bollard	10	in: 36 x 4½ cm: 91.5 x 11.5	in: 8 x 8 x 3/8 cm: 20.4 x 20.4 x 1	28 lbs./12.7 kg.
1744	4" Round Bollard Post	40	in: 42 x 41/2 cm: 106.7 x 11.4	in: 8 x 8 x 3/8 cm: 20.4 x 20.4 x 1	50 lbs./22.7 kg.
174410	4" Round Bollard	10	in: 42 x 41/2 cm: 106.7 x 11.5	in: 8 x 8 x % cm: 20.4 x 20.4 x 1	30 lbs./13.6 kg.
1749	4" Round Post Cap	40	Dia: in: 5 cm: 12.7	NA	2 lbs./1 kg.
1755	5" Round Bollard Post	40	in: 24 x 53/5 cm: 61 x 14.3	in: $10 \times 10 \times \%$ cm: $25.4 \times 25.4 \times 1$	45 lbs./20.5 kg.
1756	5" Round Bollard Post	40	in: 36 x 53/5 cm: 91.5 x 14.3	in: 10 x 10 x 3/2 cm: 25.4 x 25.4 x 1	60 lbs./27.3 kg.
1757	5" Round Bollard Post	40	in: 42 x 53/5 cm: 106.7 x 14.3	in: 10 x 10 x 3/2 cm: 25.4 x 25.4 x 1	67 lbs./30.4 kg.
1758	5" Round Post Cap	40	Dia: in: 57/8 cm: 12.7	NA	2 lbs./1 kg.
1752	5" Square Bollard Post	40	in: 24 x 5 cm: 61 x 12.7	in: 10 x 10 x 3/8 cm: 25.4 x 25.4 x 1	35 lbs./15.9 kg.
1753	5" Square Bollard Post	40	in: 36 x 5 cm: 91.5 x 12.7	in: 10 x 10 x 3/8 cm: 25.4 x 25.4 x 1	47 lbs./21.4 kg.
1754	5" Square Bollard Post	40	in: 42 x 5 cm: 106.7 x 12.7	in: 10 x 10 x 3/8 cm: 25.4 x 25.4 x 1	53 lbs./24.1 kg.
1759	5" Square Post Cap	40	Square: in: 51/4 cm: 13.4	NA	2 lbs./1 kg.
1763	6" Round Bollard Post	40	in: 36 x 6 % cm: 91.5 x 16.9	in: 10 x 10 x % cm: 25.4 x 25.4 x 1	65 lbs./29.5 kg.
176310	6" Round Bollard	10	in: 36 x 6% cm: 91.5 x 16.9	in: 10 x 10 x % cm: 25.4 x 25.4 x 1	40 lbs./18.2 kg.
1764	6" Round Bollard Post	40	in: 42 x 6% cm: 106.7 x 16.8	in: 10 x 10 x 3/8 cm: 25.4 x 25.4 x 1	72 lbs./32.7 kg.
176410	6" Round Bollard	10	in: 42 x 6% cm: 106.7 x 16.9	in: 10 x 10 x % cm: 25.4 x 25.4 x 1	44 lbs./20 kg.
1769	6" Round Post Cap	40	Dia: in: 7 cm: 17.8	NA	2 lbs./1 kg.

Model 1754 5" (12.7 cm.) Model 1764 6" (15.2 cm.) Model 174710 4" (10.2 round 42" (106.7 cm.) x 65/8" (16.8 cm.) . **Model 177010** 4" (10.2 cm.) machine Model 1744 4" round Model 176510 4" (10.2 cm.) 42" (106.7 cm.) x 41/2" (11.4 cm.) 9" (22.9 cm) x 36" (91.4 cm.)

	Machine Guards - Schedule 10							
Model	Description	Sched.	Dimensions (h x w)	Plate Size	Weight			
176510	4" Low Profile Rack Guard	10	in: 9 x 36 cm: 22.9 x 91.4	in: 8 x 8 x 3/8 cm: 20.4 x 20.4 x 1	30 lbs./13.6 kg.			
174510	4" Low Profile Rack Guard	10	in: 9 x 48 cm: 22.9 x 121.9	in: 8 x 8 x 3/8 cm: 20.4 x 20.4 x 1	35 lbs./15.9 kg.			
174610	4" Machine Guard (low)	10	in: 24 x 36 cm: 61 x 91.4	in: 8 x 8 x 3/8 cm: 20.4 x 20.4 x 1	46 lbs./20.8 kg.			
177010	4" Machine Guard (low)	10	in: 24 x 48 cm: 61 x 121.9	in: 8 x 8 x 3/8 cm: 20.4 x 20.4 x 1	51 lbs./23.1 kg.			
177110	4" Machine Guard (high)	10	in: 42 x 36 cm: 106.7 x 91.4	in: $8 \times 8 \times \frac{3}{8}$ cm: $20.4 \times 20.4 \times 1$	60 lbs./27.3 kg.			
174710	4" Machine Guard (high)	10	in: 42 x 48 cm: 106.7 x 121.9	in: 8 x 8 x 3/8 cm: 20.4 x 20.4 x 1	61 lbs./27.7 kg.			
177210	4" Rack Guard	10	in: 16 x 36 cm: 40.6 x 91.4	in: $8 \times 8 \times \frac{3}{8}$ cm: $20.4 \times 20.4 \times 1$	40 lbs./18.2 kg.			
177310	4" Rack Guard	10	in: 16 x 48 cm: 40.6 x 121.9	in: 8 x 8 x 3/8 cm: 20.4 x 20.4 x 1	46 lbs./20.8 kg.			
177410	4" Machine Guard	10	in: 36 x 36 cm: 91.4 x 91.4	in: $8 \times 8 \times \frac{3}{8}$ cm: $20.4 \times 20.4 \times 1$	55 lbs./24.9 kg.			
177510	4" Machine Guard	10	in: 36 x 48 cm: 91.4 x 121.9	in: 8 x 8 x % cm: 20.4 x 20.4 x 1	60 lbs./27.3 kg.			

Wall Protectors and Corner Protectors

Wall Protectors

Our wall protectors help prevent damage to walls in areas with forklift, hand truck or drum traffic. These guards are made of high-visibility yellow, high-density polyethylene; never need painting; and resist cracking and chipping. Can be mounted end to end. and feature unique energy absorbing construction. (Set of two) (Anchors not included)

Corner Protectors

HDPE Corner Protectors deflect the impact, helping to protect plant areas prone to damage by fork truck, hand truck or personnel traffic. Provide easy installation with bolts or optional straps (not provided). Two sizes to meet most needs sold in sets of two, inside measurement 4 in. (10.2 cm.) x 8 in. (20.3 cm.) and outside measurement 6 in. (15.2 cm.) x 10 in. (25.4 cm.).

Model 1726 6 in. (15 cm.) Wall Protector 6 in. x 42 in. x 2 in. (15 cm. x 106.7 cm. x 5.1 cm.) (each) (Sold as set of two) (Anchors not included)





Model 1725 42 in. (106.7 cm.) Corner Protector 42 in. x 6 in. x 10 in.

(106.7 cm. x 15.2 cm. x 25.4 cm.)

IM 4 in. (10.2 cm.) x 8 in. (20.3 cm.)

OM 6 in. (15.2 cm.) x 10 in. (25.4 cm.)

(each) (Sold as set of two)

	Wall Protectors								
Model	Item	Dimensions (w x l x d)	Weight per set						
1726	6" Wall Protector (set of two)	in: 6 x 42 x 2 cm: 15.3 x 106.7 x 5.1 each	8 lbs./3.7 kg.						
1728	10" Wall Protector (set of two)	in: 10 x 42 x 2 cm: 25.4 x 106.7 x 5.1 each	14 lbs./6.4 kg.						

Corner Protectors								
Model	Item	Dimensions (w x I x d)	Weight per set					
1720	21" Corner Protector (set of two) in: 21 x 6 x 10 cm: 53.3 x 15.2 x 25.4 each	10 lbs./4.6 kg.					
1725	42" Corner Protector (set of two) in: 42 x 6 x 10 cm: 106.7 x 15.2 x 25.4 each	20 lbs./9.1 kg.	10				


00% Recyclable

Column Protectors

Affordable protection for warehouse and factory columns, posts and beams. Absorbs impact from tow motors, minimizing column, fork truck, and personnel damage and injury. These blow-molded 100 percent high-density polyethylene protectors are resistant to most chemicals and feature key-lock to prevent slippage and assist with installation alignment. Available to fit 4 in. (10.2 cm.), 6 in. (15.2 cm.), 8 in. (20.3 cm.), 10 in. (25.4 cm.) and 12 in. (30.5 cm.) round or square supports. No tools required. Two halves attach with easy-to-install straps. Protectors come in yellow with black straps, and orange or lime green with high-visibility reflective straps. (Tested with fork truck: 8,500 lbs. (3855.5 kg.) at 5 mph (8 kph). Replace if damaged.)



The 1709 model was designed to fit 9 in. (22.9 cm.) round columns and is available in yellow with black straps, and orange or lime green with high-visiblilty reflective straps.



1712 17120R 72) HDPE

100% Recyclable

Mini Column Protectors

Eagle's 'Mini' Column Protectors (Model 1724) are perfect for affordable warehouse and factory protection under fire extinguishers, and absorb impact from tow motors, minimizing column and fork truck damage. These blow-molded, 100 percent high-density polyethylene protectors feature key-locks to prevent slippage and assist installation alignment.

(10.2-15.2 cm.)

Column V-Profile

Two halves attach with easy-to-use straps with no tools required.

These models are designed to fit 6 in. (15.2) cm.), 8 in. (20.3 cm.), 10 in. (25.4 cm.) and 12 in. (30.5 cm.) round or square supports and are available in yellow or red. (Replace if damaged)

Model	Item	ient veicio Straps
1701	92"/233.7 cm.	Nylon Replacement Strap
1701REFL	92"/233.7 cm.	Reflective Nylon Replacement St



Model 1724-10

Model 172412 RED 12 in. (30.5 cm.)

Column Protector / 24 in. x 24 in. x 24 in. (61 cm. x 61 cm. x 61 cm.)



9" (22.9 cm.)





Model 1706

8" (20.3 cm.) 6" (15.2 cm.) Column

Rack Guard

12"(30.5 cm.)

1703

The NEW Eagle Rack Guard is designed to help prevent rack and shelving damage from forklifts and pallet trucks. With a quick and easy snap on design, these models require no tools to install and can be stacked for a desired height to comply with the international standard of 16" (40.6 cm.). The rack guard's narrow profile minimizes interference with valuable storage space.

10" (25.4 cm.) Column



		O .
Rac	ck Guard	
Dimensions	Fits Racking	Weight
in: 6 x 5 x 8 cm: 15.3 x 12.7 x 20.4	in: 1.5 x 3 cm: 3.8 x 7.6	2 lbs./0.9 kg.
in: 6 x 5 x 8 cm: 15.3 x 12.7 x 20.4	in: 3 x 3 cm: 7.6 x 7.6	2 lbs./0.9 kg.

	Yellow Column Protectors		
Model	Item	Dimensions	Weight
1704	Column Protector for 4-6" Column	in: 13 x 13 x 42 cm: 33.1 x 33.1 x 106.7	16 lbs./7.6 kg.
1706	Column Protector for 6" Column	in: 24 x 24 x 42 cm: 61 x 61 x 106.7	40 lbs./18.2 kg.
1708	Column Protector for 8" Column	in: 24 x 24 x 42 cm: 61 x 61 x 106.7	40 lbs./18.2 kg.
1709	Column Protector for 9" Column	in: 24 x 24 x 42 cm: 61 x 61 x 106.7	40 lbs./18.2 kg.
1710	Column Protector for 10" Column	in: 24 x 24 x 42 cm: 61 x 61 x 106.7	40 lbs./18.2 kg.
1712	Column Protector for 12" Column	in: 24 x 24 x 42 cm: 61 x 61 x 106.7	40 lbs./18.2 kg.
Hi-Vis Column Protectors			
Model	Item	Dimensions	Weight

	Hi-Vis Column F	Protectors	
Model	Item	Dimensions	Weight
1706LM	Column Protector for 6" Column-Lime w/Reflective	in: 24x24x42 cm: 61x61x106.7	40 lbs./18.2 k
1706OR	Column Protector for 6" Column-Orange w/Reflective	in: 24x24x42 cm: 61x61x106.7	40 lbs./18.2 k
1708LM	Column Protector for 8" Column-Lime w/Reflective	in: 24x24x42 cm: 61x61x106.7	40 lbs./18.2 k
17080R	Column Protector for 8" Column-Orange w/Reflective	in: 24x24x42 cm: 61x61x106.7	40 lbs./18.2 l
1709LM	Column Protector for 9" Column-Lime w/Reflective	in: 24x24x42 cm: 61x61x106.7	40 lbs./18.2 k
7090R	Column Protector for 9" Column-Orange w/Reflective	in: 24x24x42 cm: 61x61x106.7	40 lbs./18.2 k
1710LM	Column Protector for 10" Column-Lime w/Reflective	in: 24x24x42 cm: 61x61x106.7	40 lbs./18.2 l
7100R	Column Protector for 10" Column-Orange w/Reflective	in: 24x24x42 cm: 61x61x106.7	40 lbs./18.2 l
712LM	Column Protector for 12" Column-Lime w/Reflective	in: 24x24x42 cm: 61x61x106.7	40 lbs./18.2 k
7120R	Column Protector for 12" Column-Orange w/Reflective	in: 24x24x42 cm: 61x61x106.7	40 lbs./18.2 l

	Mini Column Protectors				
Model	Item	Dimensions	Weight		
17246	Column Protector for 6" Column, Yellow	in: 24 x 24 x 24 cm: 61 x 61 x 61	30 lbs./13.6 kg.		
17246RED	Column Protector for 6" Column, Red	in: 24 x 24 x 24 cm: 61 x 61 x 61	30 lbs./13.6 kg.		
17248	Column Protector for 8" Column, Yellow	in: 24 x 24 x 24 cm: 61 x 61 x 61	30 lbs./13.6 kg.		
17248RED	Column Protector for 8" Column, Red	in: 24 x 24 x 24 cm: 61 x 61 x 61	30 lbs./13.6 kg.		
172410	Column Protector for 10" Column, Yellow	in: 24 x 24 x 24 cm: 61 x 61 x 61	30 lbs./13.6 kg.		
172410RED	Column Protector for 10" Column, Red	in: 24 x 24 x 24 cm: 61 x 61 x 61	30 lbs./13.6 kg.		
172412	Column Protector for 12" Column, Yellow	in: 24 x 24 x 24 cm: 61 x 61 x 61	30 lbs./13.6 kg.		
172412RED	Column Protector for 12" Column, Red	in: 24 x 24 x 24 cm: 61 x 61 x 61	30 lbs./13.6 kg.		





GUARDS & PROTECTORS

Eagle offers the widest selection of HDPE Bollard Post Sleeves available

Eagle's HDPE Bollard Post Sleeves make old bollards look like new. High Density Polyethylene (HDPE) construction with UV inhibitors resist fading, rusting and cracking. The post sleeves are designed to easily fit over 4 in. (10.2 cm.), 6 in. (15.2 cm.) and 8 in. (20.3 cm.) NPT pipe and eliminate the need for annual maintenance, while helping to protect vehicles and the post from impact damage. The unique design allows for easy slide-on installation.

- Improves property appearance at minimal cost
- Saves on annual painting and scraping of old bollards
- Slides over existing posts for easy installation
- High-quality, all-weather HDPE will not rust or dent
- Fade resistant with UV inhibitors
- Colors to match many exteriors
- Sleeve height may be easily trimmed for an exact fit

Original HDPE Bumper Post Sleeves

The Original HDPE Bumper Post Sleeves have a vertical fluted

design to provide extra protection and easier installation. They

come 56 in. (142.24 cm.) in length (to fit 4 in./10.2 cm., 6 in./15.2 cm. and 8 in./20.3 cm. pipe) and are available in yellow, red, blue,

white, green, orange, lime, brown and black. The 72 in. (182.9 cm.) length Bumper Post Sleeves (to fit 6 in./15.2 cm. and 8 in./20.3

cm. pipe) are available in yellow only. Sleeve height may be easily



8" x 72" (20.3 cm. x 182.9 cm.) 6" x 72" (15.2 cm x 182.9 cm.) **Model 1738 Model 1730 Model 1732** (10.2 cm. x 142.3 cm.)

in: 5% cm: 14.6 in: 56 cm: 142.3

in: 43/4 cm: 12.1



in: 57 cm: 144.8

in: 72 cm: 182.9

in: 72 cm: 182.9

1732R

in: 6/s cm: 17.5 in: 7/s cm: 20 in: 56 cm: 142.3 1730R 1730GN 1730GN 1730DR 1730BM 1730BK 1730BLK 1730BL 8 lbs./3.7 kg.



1732 1732GN 1732OR 1732LM 1732BR 1732BLK 1732BL 5 lbs./2.3 kg.

1738GN 17380R 1738LM 1738BR 1738BLK 1738BL 9 lbs./4.1 kg.

Model 1730BR 6" (15.2 cm.) (Brown) **Bollard Post Sleeve** 4" (10.2 cm.) 6" (15.2 cm.)



Model 1732 BASE 1730 BASE

Poly Base


Poly bases available for 4" (10.2 cm.) and 6" (15.2 cm.) post sleeves to convert into poly bollard.



Benefits of all Eagle HDPE Post Sleeves:

- HDPE thickness

trimmed for an exact fit.



HDPE Smooth Bollard Post Sleeves

Eagle's Smooth Bollard Post Sleeves are available to fit over 4 in. (10.2 cm.), 6 in. (15.2 cm.) and 8 in. (20.3 cm.) pipe and are available in red, yellow and blue (available in other colors for quantity orders). The smooth sleeves are 56 in. (142.2 cm.) in length and provide the same maintenance-free protection as the original bumper post sleeves. Sleeve height may be easily trimmed for an exact fit.

Smooth Post Sleeves							
Size	I.D.	0.D.	Height	Red	Yellow	Blue	Weight
4"	in: 43/4 cm: 12.1	in: 51/4 cm: 13.4	in: 56 cm: 142.3	1735R	1735	1735BL	4 lbs./1.8 kg.
6"	in: 61/8 cm: 17.5	in: 7% cm: 18.8	in: 56 cm: 142.3	1736R	1736	1736BL	6 lbs./2.8 kg.
8"	in: 87/ ₈ cm: 22.6	in: 93//6 cm: 23.9	in: 57 cm: 144.8	1737R	1737	-	8 lbs./3.7 kg.



Model 1736 (15.2 cm.) Smooth Post Sleeve 6.875 in. x 56 in. (142.3 cm.)



HDPE Smooth Bollard Post Sleeves with Reflective Stripes

New to the Eagle Bollard Post Sleeve family are the HDPE Smooth Bollard Post Sleeves with reflective stripes. Keep your facility safe and protected with sleeves to fit over 4 in. (10.2 cm.), 6 in. (15.2 cm.) and 8 in. (20.3 cm.) pipe in HDPE yellow with two red stripes, or red with two white stripes. Sleeve height may be easily trimmed for an exact fit.

Smooth Post Sleeves with Reflective Stripes						
Siz	e I.D.	0.D.	Height	Red	Yellow	Weight
4"	in: 43/4 cm: 12.1	in: 51/4 cm: 13.4	in: 56 cm: 142.3	1735RWS	1735YRS	4 lbs./1.8 kg.
6"	in: 67/8 cm: 17.5	in: 73/8 cm: 18.8	in: 56 cm: 142.3	1736RWS	1736YRS	6 lbs./2.8 kg.
8"	in: 8% cm: 22 6	in: 93/cm: 23.9	in: 57 cm: 144.8	1737RWS	1737YRS	8 lhs /3 7 kg

Decorative Post Sleeves

Beautiful HDPE post sleeves slip over 4 in. (10.2 cm.) x 4 in. (10.2 cm.) wooden or steel posts or can be used free standing with optional rubber base. Available in three styles. Includes 6 ft. (182.9 cm.) of poly chain.



Hitching Post

	ArmorKraft® Decorative Post Sleeve		
Model	Description	Dimensions (base dia. x h.)	Weight
1713BLK	Classic	in: 121/2 x 37 cm: 31.8 x 94	10 lbs./4.5 kg.
1715BLK	Hitching Post	in: 121/2 x 43 cm: 31.8 x 109.2	10 lbs./4.5 kg.
1719BLK/1719WHT	Replacement Chain Kit	6 ft. / 182.8 cm. long	1 lb./0.5 kg.
1718BASF	Rubber Base Kit	in: 12 x 234 cm: 30.5 x 10.2	10 lbs /4.5 kg

Eagle e-CART **Features:** Industrial Waste Cart

65 Gallon (246 L)

Constructed of durable HDPE

Ergonomically designed handles

- HDPE wheels on a heavy duty steel axle Model 1696BLK
 - Double-walled hinged lid with a hold-down tab
 - Rugged galvanized steel bar handles
 - Wear tabs on the bottom

Eagle e-	Eagle e-CART Wheeled Industrial Waste Container							
Model	Description	Capacity	Color	Weight				
1696BLK	Eagle e-CART Wheeled Industrial Waste Container	65 gal./246 L	Black	32 lbs./14.5 kg.				
1696GN	Eagle e-CART Wheeled Industrial Waste Container	65 gal./246 L	Green	32 lbs./14.5 kg.				
1697BLK	Eagle e-CART Wheeled Industrial Waste Container	95 gal./359.6 L	Black	38 lbs./17.2 kg.				
1697GN	Eagle e-CART Wheeled Industrial Waste Container	95 gal./359.6 L	Green	38 lbs./17.2 kg.				

Model 1696GN Model 1697BLK





TRAFFIC SAFETY PRODUCTS

Protective Parking Stops & Speed Bump-Cable Protectors

Eagle Parking Stops, designed with safety and durability in mind, eliminate the need for seasonal painting. Flexible enough to fit parking lot contours – the rugged HDPE Stops are weather and chemical resistant. Eagle offers four colors – the high-visibility vellow, blue for handicapped areas, gray and black. Anchor kit with three spikes and tube of asphalt adhesive included.

Eagle Speed Bump-Cable Protectors add safety to your facility. The high-visibility vellow bumps are engineered at the perfect angle. They also act as a dual channel cable protector, feature a non-skid surface, and are weather and chemical resistant. HDPE construction means you eliminate the need to continually paint bumps. The 6 ft. (22.7 cm.) anchor kit includes six spikes and a tube of asphalt adhesive. The 9 ft. (34.1 cm.) anchor kit includes eight spikes and a tube of asphalt adhesive.

		Protective Parking Stops			
Model	Description	Dimensions (w x h x l)	Weight		
1790Y	Parking Stop-Yellow	in: 8 x 4 x 72 cm: 20.3 x 10.2 x 182.9	15 lbs./6.8 kg.		
1790B	Parking Stop-Blue	in: 8 x 4 x 72 cm: 20.3 x 10.2 x 182.9	15 lbs./6.8 kg.		
1790G	Parking Stop-Gray	in: 8 x 4 x 72 cm: 20.3 x 10.2 x 182.9	15 lbs./6.8 kg.		
1790BLK	Parking Stop-Black	in: 8 x 4 x 72 cm: 20.3 x 10.2 x 182.9	15 lbs./6.8 kg.		

		Speed Bump-Cable Protectors						
	Model	Description	Dimensions (w x l x h)	Weight	Load*			
	1792	6' Speed Bump-Cable Guard	in: 10 x 72 x 2 cm: 25.4 x 182.9 x 5.1	20 lbs./9.1 kg.	20,000 lbs./9,071 kg.			
1700 0' Conned Down Calaba Conned in		O' Conned Down Colds Conned	: 10 100 0 0F 4 074 4 F 1	OF II /11 4 I	20 000 II /0 074 I			


Load Tested to 10,000 lbs./4535 kg. per Pneumatic Tire



Model 1790Y Parking Stop - Yellow in: 8W x 4H x 72L/cm: 20.3W x 10.2H x 182.9L



Model 1792 6 ft. Speed Bump -**Inside Channel Dimensions:** Cable Guard/in: 10W x 2H x 72L in: 1.25W x 0.875H/cm: 3.2W x 2.2H cm: 25.4W x 5.1H x 182.9L



*Load Tested to 20,000 lbs./9,061 kg. per Pneumatic Tire Model 1793 9 ft. Speed Bump - Cable Guard Kit/in: 10W x 2H x 108L cm: 25.4W x 5.1H x 274.4L - Two 4.5 ft. (137 cm) sections *Pre-drill concrete for installation

Poly Guide-Post Delineators™ & Poly Bollard Posts

Poly Guide-Post Delineators™

Lightweight, portable, yieldable HDPE posts used to warn, guide and delineate. Feature 3 in. (11.4 cm.) – wide reflective bands for increased visibility and are MUTCD compliant. Posts are mounted on a 10 in. (37.9 cm.) sq. poly plate with anchor slots (3/4 in./2.8 cm.) for permanent use or used with steel base for portable stability.

Poly Bollard Posts

Create a low-cost, maintenance-free caution zone. These 42 in. (159 cm.) – high poly bollards are available in a 5 in. (18.9 cm.) or 7 in. (26.5 cm.) model with a poly base with anchor slots (3/4 in./2.8 cm.) that can be anchored for maximum stability or used with optional weighted steel base.



Poly Guide-Post Delineator-Yellow in: 5.75 x 42 cm: 14.6 x 106.7 6 lbs./2.7 kg. Poly Guide-Post Delineator-Lime in: 5.75 x 42 cm: 14.6 x 106.7 6 lbs./2.7 kg. Poly Guide-Post Delineator-Orange in: 5.75 x 42 cm: 14.6 x 106.7 6 lbs./2.7 kg.

Poly Bollards/Posts					
Model	Description Dimensions (w x h) Weight				
1731	5" Poly Bollard	in: 5 x 42 cm: 12.7 x 106.7	5 lbs./2.3 kg.		
1733	7" Poly Bollard	in: 7 x 42 cm: 17.8 x 106.7	8 lbs./3.6 kg.		
1731BASE	Steel Weighted Base for 1731 1733 & 1734	in: 10 x 10 x 3 75 cm: 25 4 x 25 4 x 9 6	12 lhs /5 4 kg		

All-in-one Steel Bollard Post & Poly Post Sleeve Combos!

These combos bring you the security of our ¼" (.9 cm.) thick steel Bollards, packaged with the protection and zero maintenance of our smooth Poly Post Sleeves. The combos are available in round 4" (15.1 cm.) and 6" (22.7 cm.) bollard/sleeves 36" (136.3 cm.) high and 42" (159 cm.) high. Each combo includes a foam installation kit for a perfect fit! Kit may be ordered separately.







Madal	Bollard Post & Sleeve Combos Description Dimensions (h x dia) Sleeve Dim. (h x dia) Item Weight				
iviodei	Description	Dimensions (n x dia)	Sieeve Dim. (n x dia)	item	vveignt
1743PS	4" Bollard w/Sleeve	in: 36 x 4.5/cm: 91.5 x 11.5	in: 36 x 5/cm: 91.5 x 12.7		50 lbs./22.7 kg
1744PS	4" Bollard w/Sleeve	in: 42 x 4.5/cm: 106.7 x 11.5	in: 42 x 5/cm: 106.7 x 12.7		55 lbs./25 kg.
1763PS	6" Bollard w/Sleeve	in: 36 x 6.6/cm: 91.5 x 16.9	in: 36 x 7/cm: 91.5 x 17.8		70 lbs./31.8 kg
1764PS	6" Bollard w/Sleeve	in: 42 x 6.6/cm: 106.7 x 16.9	in: 42 x 7/cm: 106.7 x 17.8		77 lbs./35 kg.
1739KIT	Installation Kit for Pos	st Sleeves			

5 in./12.7 cm. diameter Model No. 1780

Model No. 1781

7 in./17 cm. diameter

Safety Clearance Bars

Eagle introduces two safety clearance bars for use in drive-thrus, parking garages and much more. Clearance Bars provide an early warning for motorists, reducing structural and vehicle damage. This is even more necessary as SUVs and pickups have grown in size. The Clearance Bars are constructed of high-visibility yellow polyethylene and are available in 76 in. (193 cm.) and 77 in. (195.6 cm.) lengths in either 5 in. (12.7 cm.) or 7 in. (17.8 cm.) outside diameter. Both come with eyebolts for easy installation (chain not included).

Clearance Bars						
Model	Description	Dimensions (dia x I)	Weight			
1780	5" Clearance Bar	in: 5 x 76 cm: 12.7 x 193.1	7 lbs./3.2 kg.			
1781	7" Clearance Bar	in: 7 x 77 cm: 17.8 x 195.6	9 lbs./4.1 kg.			

100% Recyclable



Model 1781 Clearance Bar / in: 7 in. dia. x 77 in. L





POLY DOCKPLATES & RAMPS





1797

Portable Poly Dockplate 48"

in: 48 x 36 x 5 cm: 122 x 91.5 x 12.7

40 lbs./18.2 kg.

750 lbs./340.2 kg.

4 in./10.2 cm.



1796

Fixed Poly Dockplate

in: 35 x 26 x 5 cm: 89 x 66.1 x 12.7

20 lbs./9.1 kg.

1,000 lbs./453.6 kg.

4 in./10.2 cm.



1795CR

Shipping Container Ramp


in: 35 x 36 x 6 cm: 89 x 91.5 x 15.3

25 lbs./11.4 kg.

750 lbs./340.2 kg.

10 in./25.4 cm.





Two integrated handles

Rubber beveled entry and exit edges



Eagle's new Airplane Service Ramp is constructed of durable, lightweight, high-density polyethylene (HDPE) for use in transferring service carts from the service vehicle into the aircraft. This ramp features a lightweight (28 lbs./12.7 kg.) ergonomic design with a raised textured surface, beveled entry and exit edges, high-visibility yellow HDPE, fulllength guardrails with integrated handles for easy handling and a 1,000-lb. (453.6 kg.) load capacity (UDL).100 percent made in the USA.

Height Diff.

Model Numbers	1794	1795
Name	Poly Curb Ramp	Portable Poly Dockplate 35"
Dimension W x L x H	in: 27 x 27 x 4 cm: 68.6 x 68.6 x 10.2	in: 35 x 36 x 5 cm: 89 x 91.5 x 12.7
Weight	9 lbs./4.1 kg.	37 lbs./16.8 kg.
Max Load Uniform Distributed Load (UDL)	1,000 lbs./453.6 kg.	750 lbs./340.2 kg.

For Models 1795 & 1797

- For use with two- and four-wheeled dollies, hand trucks and carts
- Lightweight, ergonomic design is easy to use
- Raised surface for excellent traction in all weather conditions
- Beveled entry and exit edges

4 in./10.2 cm.

- Aluminum legs for durability and strength
- Constructed of yellow HDPE
- Two integrated handles for easy handling
- Available in 35 in. (89 cm.) and 48 in. (122 cm.) widths

Compliance: Meets OSHA 1910.30(a)



- Lift-n-lower ergonomic design helps reduce injuries
- Features molded-in, raised surface and integrated side rails
- Coated steel installation kit installs easily on metal or concrete dock facings
- 6 in. (15.3 cm.) slide bar for easy truck centering or out-of-the-way storage



1796KIT Fixed Poly Dockplate Installation Kit

- For use with hand trucks and dollies for loading and unloading
- Features a hook rail that attaches to the doorkeepers for secure, three-point contact and support across the width of the ramp, as well as a tab that inserts into the keepers to help prevent lateral movement of the ramp during use



For use with hand trucks or wheeled carts

Provides an ergonomically correct method to move heavy loads over curbs or up steps

8 in./20.3 cm.

- Raised surface for excellent traction in all weather conditions
- 1in. (2.5 cm.) side rails
- Constructed of yellow HDPE
- Lightweight (9 lbs./4.1 kg.) with two handles with rounded edges for easy pickup, carrying and handling
- Ramp also used with Eagle Safety -Cabinets as cabinet ramp





Justrite Safety Group



FREE!
COMPLIANCE
SOLUTIONS
GUIDE

C.L.A.W.S. is a compliance evaluation system utilized to promote employee and public safety, property protection and environmental conservation by specifying approved products that meet specific federal regulations concerning containment, liquid handling, waste management and safety storage of hazardous materials. Go to our website to request a **FREE C.L.A.W.S.** guide.

eagle-mfg.com

Eagle Manufacturing Company, established in 1894, is a prime manufacturer of Safety Cans, Safety Cabinets, Secondary Spill Containment, Poly Drums and Material Handling Protective Products. Eagle designs and manufactures all of its own products. Eagle is certified to the ISO-9001 Quality System and is the most respected brand name for consistent quality and value.

Eagle is the leading supplier of these products, offering a large selection of the industrial safety and material handling products for contractors, manufacturers, utilities, military, professional, government, printing, chemical, fabricators, transportation, textile mills, automotive, agricultural, medical, oil and gas, electrical and other industrial and commercial customers.

Eagle products are "Compliance Solutions" that help industry meet strict state and federal regulations concerning the handling and storage of hazardous materials.

Eagle Manufacturing Company > 2400 Charles Street, Wellsburg, WV 26070 P/ 304.737.3171 F/ 304.737.1752 E/ sales@eagle-mfg.com