

MOTORIZED U-BOAT



MOTORIZED U-BOAT



Transaxle can be switched to free-wheel mode when propulsion is not allowed.

Interlock button eliminates unintentional activation of propulsion system.

- Propulsion feature provides assistance for locations with inclines or that cover long distances.
- Improves productivity by maintaining consistent speed throughout a typical delivery
- Propulsion increases efficiency by reducing operator fatigue

Open differential transaxle provides 360-degree maneuverability in both propulsion and free-wheel modes.

MODEL SHOWN

MBT1621

SPECIFICATIONS

| | |
|---------------------------------|---------------------------|
| Deck | 18" wide x 60" long |
| Weight | 145 lbs. |
| Capacity | 1,000 lbs. |
| Handles | 48.5" from top of deck |
| Casters | 6" x 2" |
| Drive wheels | 9" x 3.5" solid pneumatic |
| Speed (fwd & rev) | 0-3 mph variable |
| Voltage | 24 Volts DC |
| Range (continuous/intermittent) | 6-9 hours |
| Recharge time | 4-8 hours |

Features



- Sealed-for-life transaxle requires no maintenance
- Push-too-fast safety helps user maintain control on inclines in free-wheel mode
- Motor equipped with regenerative braking, which uses the DC motor to slow the load forward or reverse and returns some of the charge to the batteries
- Throttle automatically returns to zero to stop and locks the load if the operator loses contact
- Automatic park brake engages when throttle is released, even on inclines

MOTORIZED U-BOAT

Deck Features



- Engineered for durability, longevity and extreme use
- Center tilt allows easy navigation over thresholds and bumps
- High efficiency tires with proprietary solid-fill material reduce push-and-pull effort in free-wheel mode



Robotically welded five-box aluminum construction optimized for over-the-road payload.



FIXED DRIVE HANDLE

- Adjustable U-loop handle with throttle provides maximum comfort and steering ability
- Throttle interlock button protected from accidental impact
- Bottom cross brace rests on deck to provide load containment



REMOVABLE HANDLE

- Modular construction offers service parts versus total handle replacement
- Removable handle allows access to product from three sides
- Bottom cross brace rests on deck to provide load containment

P/N
460033

MOTORIZED U-BOAT

Options

EXTRA DECK SOCKETS



- Additional interior handle socket position better accommodates smaller cube space
- Same superior maneuverability and capacity as standard deck




MAG-LOC®



| P/N | L" | WT.(LBS.) |
|--------|------|-----------|
| 302920 | 5.75 | 0.15 |

Mag-Loc anchors safely secure loads when combined with optional safety straps.



| P/N | W" | L' | WT.(LBS.) |
|--------|----|----|-----------|
| 302960 | 2 | 6 | 1.75 |
| 302922 | 2 | 12 | 2.0 |
| 302924 | 2 | 16 | 2.2 |

Cam buckle has 3,000 lb. break strength and 1,000 lb. working load with 6,000 lb. rated weather-resistant polyester webbing.

Note: 6' strap is long enough for one side of U-Boat; 12' & 16' can wrap around load.

Accessories


CONTAINMENT CURTAIN



| P/N | WT.(LBS.) |
|--------|-----------|
| 306020 | 4.0 |

Containment curtain securely holds product in place during transport.


KEG MOVER

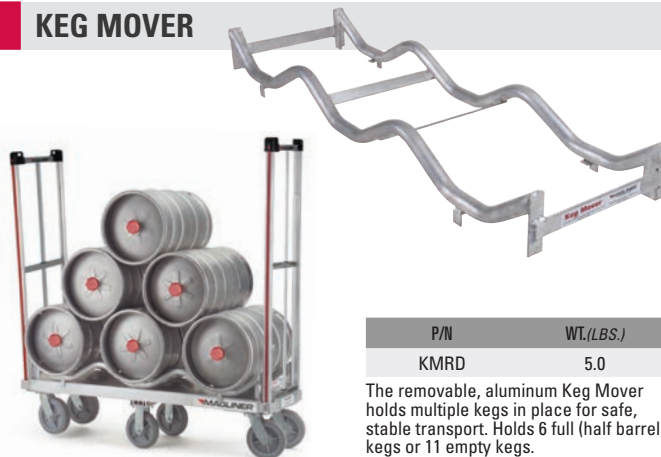

| P/N | WT.(LBS.) |
|------|-----------|
| KMRD | 5.0 |

The removable, aluminum Keg Mover holds multiple kegs in place for safe, stable transport. Holds 6 full (half barrel) kegs or 11 empty kegs.

CURB RAMP



Convenient Carrying Handle

| P/N | W" | L" | WT.(LBS.) |
|------|----|----|-----------|
| RDCR | 29 | 44 | 43.0 |

The 3,000 pound capacity curb ramp has a 9" height range. The twin-tooth deck design offers a 26" usable width that provides traction in either direction.

MAGLINER®

magliner.com

Magline, Inc.
1205 West Cedar Street | Standish, MI 48658
1.800.MAGLINE (624.5463)
(989) 512.1000 (Outside U.S. & Canada)
Fax: (989) 803.5941