


WindSigns

PLASTICADE®

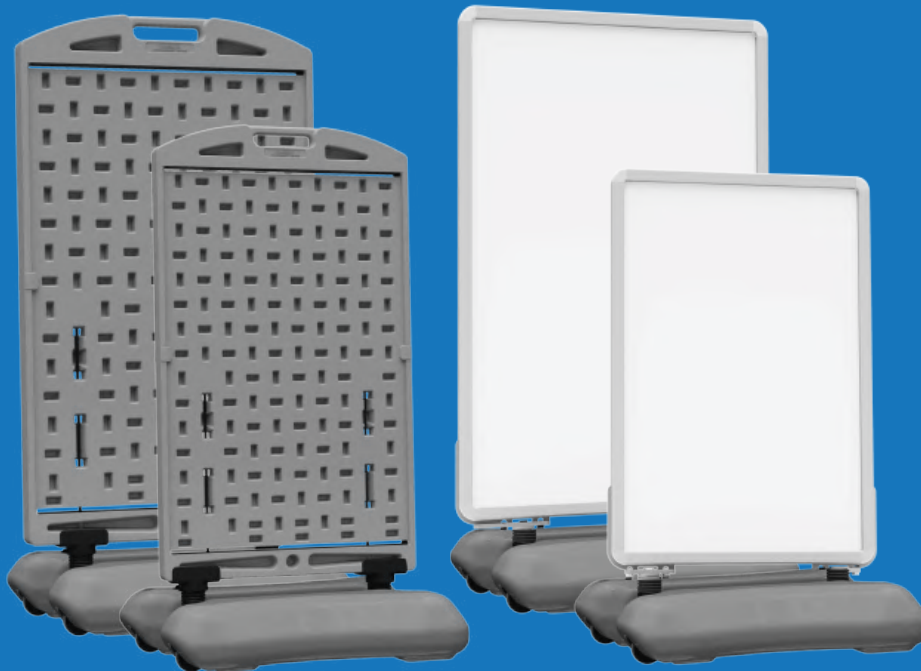

Quick-Change™ Frame

Snap Frame

Two Sign Sizes For Both Frame Types
28" x 44" & 24" x 36"
Signs



Quick-Change™ Frame

- Patented slot design - just slide in a sign up to 3/16" thick
- All plastic frame
- "Stay Tabs" keep sign securely in place
- Use indoors and out





- Display two signs per unit
- Plastic, stable wide base
- Large fill hole for sand
 - easy to fill
 - sand flows to outer corners increasing balance
- Wheels for easy movement, tilt back and roll
 - come preinstalled
- Quick assembly, no tools required

Snap Frame



Clear cover is provided to keep poster clean. When used outdoors, weather-proof sign material should be used.


- Snap open, place graphic, snap close
- Satin silver frame
- PVC Clear Protective Cover
- Use indoors and out

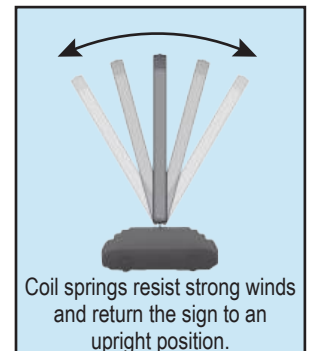


WindSigns

Specifications	Wind Sign II "Quick-Change"™ Frame	Wind Sign Deluxe™ "Quick-Change"™ Frame	Wind Sign II Snap Frame	Wind Sign Deluxe™ Snap Frame
Color	Gray	Gray	Satin Aluminum Frame with Gray Base	Satin Aluminum Frame with Gray Base
Dimensions (Frame Only)	26"W x 42.9"H x 2.5"D 66cm x 109cm x 6.35cm	30"W x 51"H x 2.5"D 76.2cm x 129.5cm x 6.35cm	26"W x 38"H x 1.3"D 66cm x 96.5cm x 3.3cm	30"W x 46"H x 1.3"D 76.2cm x 116.8cm x 3.3cm
Dimensions (Base Only)	29.5"W x 6.25"H x 24"D 74.9cm x 15.88cm x 61cm	29.5"W x 6.25"H x 24"D 74.9cm x 15.88cm x 61cm	29.5"W x 6.25"H x 24"D 74.9cm x 15.88cm x 61cm	29.5"W x 6.25"H x 24"D 74.9cm x 15.88cm x 61cm
Dimensions Assembled	29.5"W x 50.5"H 74.9cm x 128.27cm	30"W x 58.5"H 76.2cm x 148.6cm	29.5"W x 40.5"H 74.9cm x 102.87cm	30"W x 54.5"H 76.2cm x 138.4cm
Total Weight Assembled	26 lbs./11.8 kg.	31 lbs./14.1 kg.	30 lbs./13/ 6 kg.	34 lbs./15.4 kg.
Weight (Base Only)	10 lbs./4.54 kg.	10 lbs./4.54 kg.	10 lbs./4.54 kg.	10 lbs./4.54 kg.
Base Sand Ballasting	Use a max. of 115 lbs./52 kg. of dry sand	Use a max. of 115 lbs./52 kg. of dry sand	Use a max. of 115 lbs./52 kg. of dry sand	Use a max. of 115 lbs./52 kg. of dry sand
Sign Insert Size	24" x 36" (3/16" thick max.) 60.96cm x 91.44cm (.48cm thick max.)	28" x 44" (3/16" thick max.) 111.8cm x 91.44cm (.48cm thick max.)	24" x 36" (3/16" thick max.) 60.96cm x 91.44cm (.48cm thick max.)	28" x 44" (3/16" thick max.) 111.8cm x 91.44cm (.48cm thick max.)
Sign Insert Weight Limit	5 lbs./2.27 kg. per side	5 lbs./2.27 kg. per side	5 lbs./2.27 kg. per side	5 lbs./2.27 kg. per side


Wind Sign II
Quick-Change™ Frame




Wind Sign Deluxe™
Quick-Change™ Frame



Wind Sign II
Snap Frame

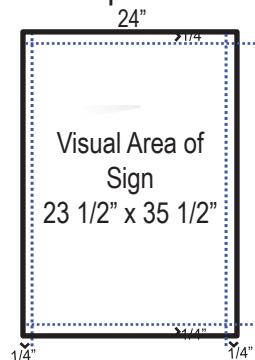


Wind Sign Deluxe™
Snap Frame

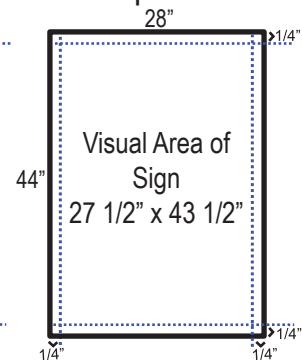

US PATENTS
7,337,569 8,646,196

Sand Ballasting Instructions

Rest wheel side of base on step or block. Unscrew cap from fill hole and pour dry sand into base. Fill with sand to achieve desired wind resistance. Sand should be level inside of base to maintain optimum balance. Shake gently to level sand.



To Obtain Desired Wind
Resistance Use Chart

Pounds of Ballast	Head-on Wind Resistance
70 lbs.	40 mph
100 lbs.	55 mph
115 lbs.	60 mph
130 lbs. maximum	



Scan For Video Instructions

PLASTICADE®

100 Howard Avenue
Des Plaines, IL 60018
phone (800) 772-0355
info@plasticade.com
Plasticade.com