



**VANDAL-RESISTANT
FASTENERS**

Special driver installs fasteners which virtually eliminates unauthorized removal and ensures easy installation.

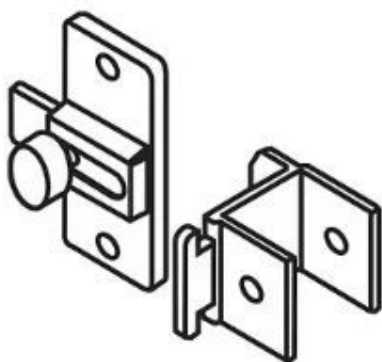


**EMERGENCY
ACCESS**

Meets ADA requirements. Slotted keeper coupled with gravity hinges allows access in an emergency.




**VAULT
HINGE**

Rugged, attractive wrap-around hinge. Extra strong for heavy-duty installations.

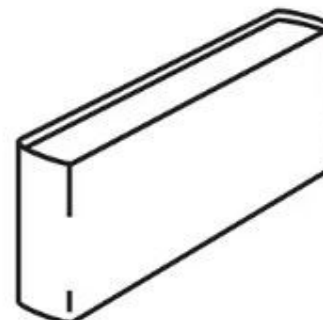


**SHOE
CONSTRUCTION**

One-piece stainless steel, type 304, with #4 satin finish trim shoes are hemmed top and bottom for rigidity and sleek appearance.

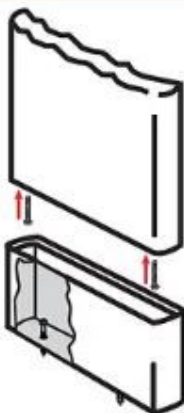


**EASY-STALL
SHOE**

For floor anchored overhead braced.
Easily adjusted leveling bolt.
True concrete anchor screws designed for lasting holding power.
Anchor rated at 2770 lbs. pullout strength.
Fabricated of type 304 stainless steel.

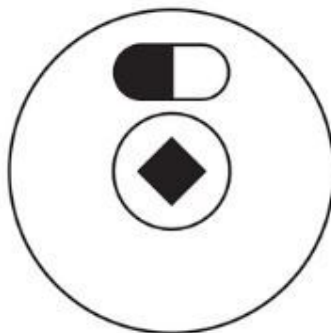

**OCCUPANCY
INDICATOR**

Occupancy latch with an emergency access capability indicates when stall is occupied.
Applicable to Phenolic partitions.

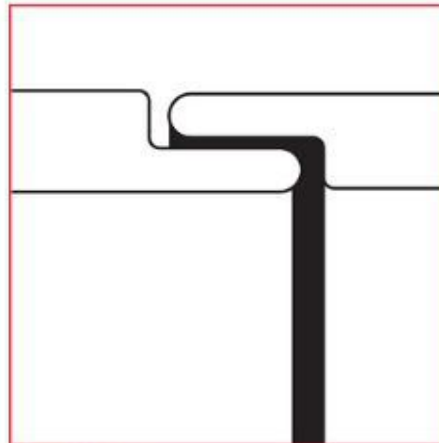

**FLUSH FINISH
SELF-CLOSING DOORS**

All of our self-closing doors and pilasters meet in a flush finish with routed, overlapping closures for guaranteed privacy.
Applicable to Phenolic and Solid Plastic partitions.