

Instruction Sheet 239681 - E35 Turbofan Ovens - Double Stacking Kits
DSKE35-26 / DSKE35-26C (26" Ovens) and DSKE35-30 / DSKE35-30C (30" Ovens).



SERVICE WORK ONLY TO BE CARRIED OUT BY QUALIFIED PERSONS

Suitable for the following models:

E35D6 (26" and 30") Ovens.
E35T6 (26" and 30") Ovens.

Contents:

As Shown in Instruction Sheet.




Packed By: -	
	/ /
Initial	Date

Caution:

Ensure that the appliance is isolated from the electrical supply before commencing servicing.

DSKE35-26 / DSKE35-30

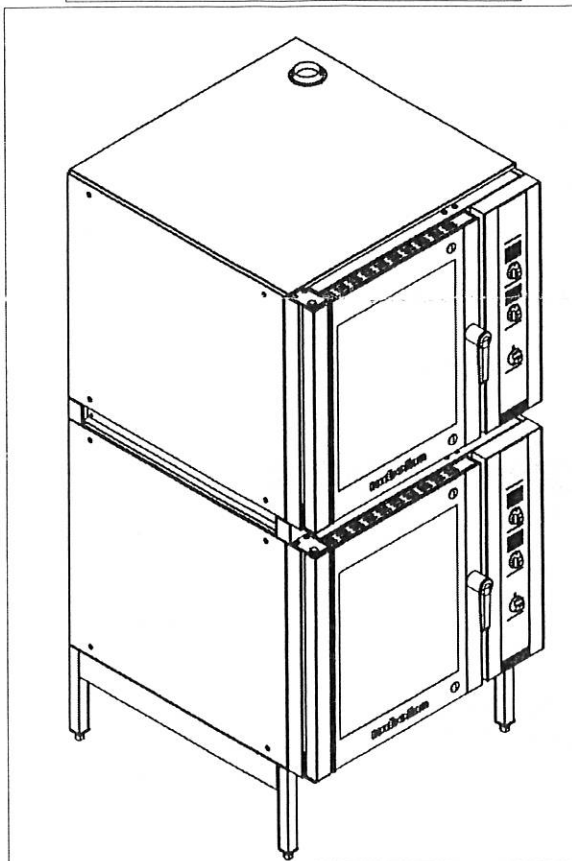

DSKE35-26C / DSKE35-30C

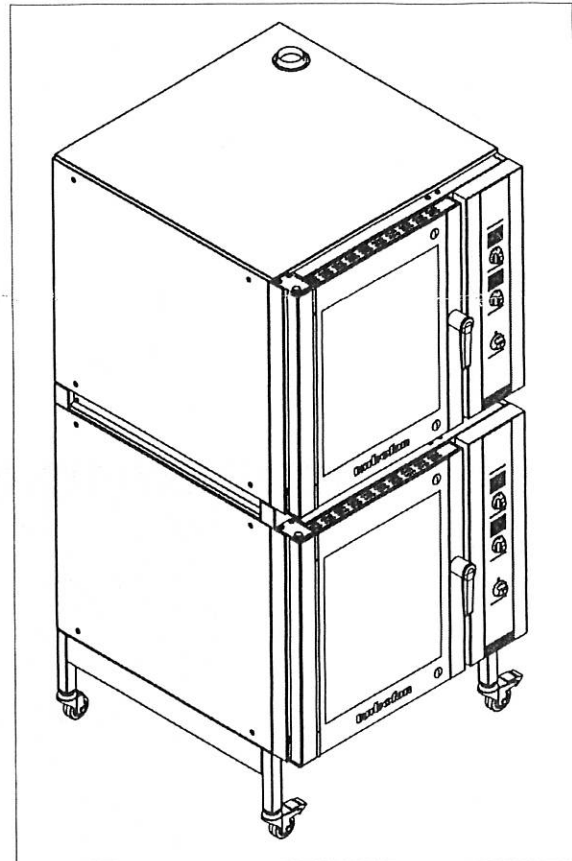


Figure 1

A. UNPACKING

Check that the kit includes all the correct parts and correct quantities for the kit purchased as listed below.


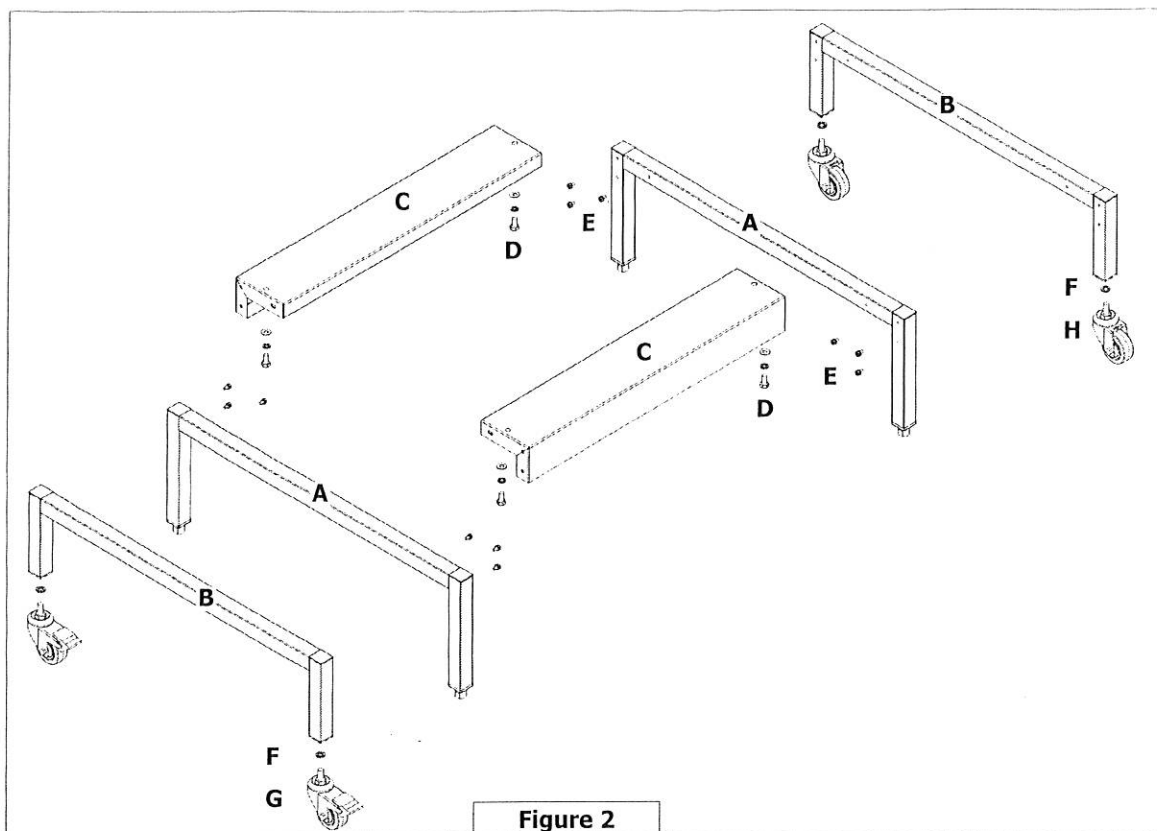


Figure 2

ITEM	DESCRIPTION	Qty	
A	STAND FRAME (ADJUSTABLE FEET)	2	Figure 2
B	STAND FRAME (CASTORS)	2	
C	STAND SIDE (TOP)	2	
D	SCREW - M10 x 20 HEX HD SS	4	
	WASHER - M10 SS	4	
	WASHER - M10 x SPRING SS	4	
E	SCREW - M6 x 12 SEM HEX HD POZI ZP	12	
F	WASHER - M12 x SPRING ZP	4	
G	SWIVEL CASTOR 75MM BRAKED (M12-PU)	4	Figure 4
H	SWIVEL CASTOR 75MM NON-BRAKED (M12-PU)	4	
K	DOUBLE STACK FRONT	1	
L	DOUBLE STACK BACK	1	
M	DOUBLE STACK SIDE	2	
N	SCREW- 1" x 3/16" RAISED CSK	4	
O	SCREW - 3/4" x 3/16" POZI MUSH	16	
P	VENT EXTENSION WA	1	Figure 6
Q	VENT GASKET	1	
R	CONNECTION SLEEVE	1	
S	HOSE CLAMP - 3"	2	
T	RTV CLEAR - 150g TUBE	1	

B. STAND

1. Place one Stand Frame (Either A or B) on a flat working surface with threaded holes facing upwards.
2. Fit both Stand Sides (C), to the Stand Frame with Screws (E).
3. Place the second Stand Frame (Either A or B) on a flat working surface with threaded holes facing upwards.
4. Turn assembly over onto the second Stand Frame and secure as shown at Items 1 and 2 above.
5. If fitting Stand Frame (A), the feet are already inserted into ends of stand frames.
6. If fitting Stand Frame (B), screw the Castors (G & H), Washers (F) to the base of the stands. Ensure that the Braked Swivel Castors (G) are fitted to the same frame.

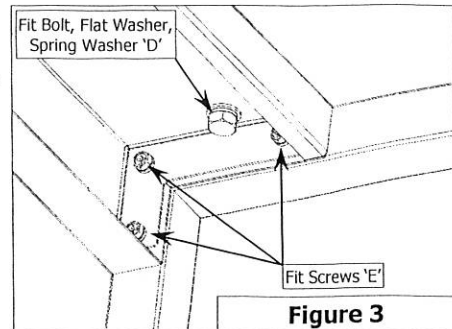

C. BOTTOM OVEN

FITTING ONTO STAND


1. Remove the feet from the oven.
2. Place oven onto stand with threaded holes in oven base plate lining up with holes in stand (at ends of sides C).
3. Secure oven to stand using Bolts, Flat Washers and Spring Washers (D). Bolt up through the Stand Side Panels (C) and into oven base plate.
4. Adjust the stand feet to level the oven.

REMOVE PANELS

5. Remove side panels from the oven, each side panel is held on by 4 screws.
6. Remove top cover from bottom oven.

STACKING ASSEMBLY


7. Assemble the Front (K), Back (L) and Sides (M), with one screw (N) at each corner (Figure 4).
8. Place stacking assembly on top of the bottom oven and attach to oven, using 1 screw (O) in each corner of the unit (at front and back) (Figure 4).

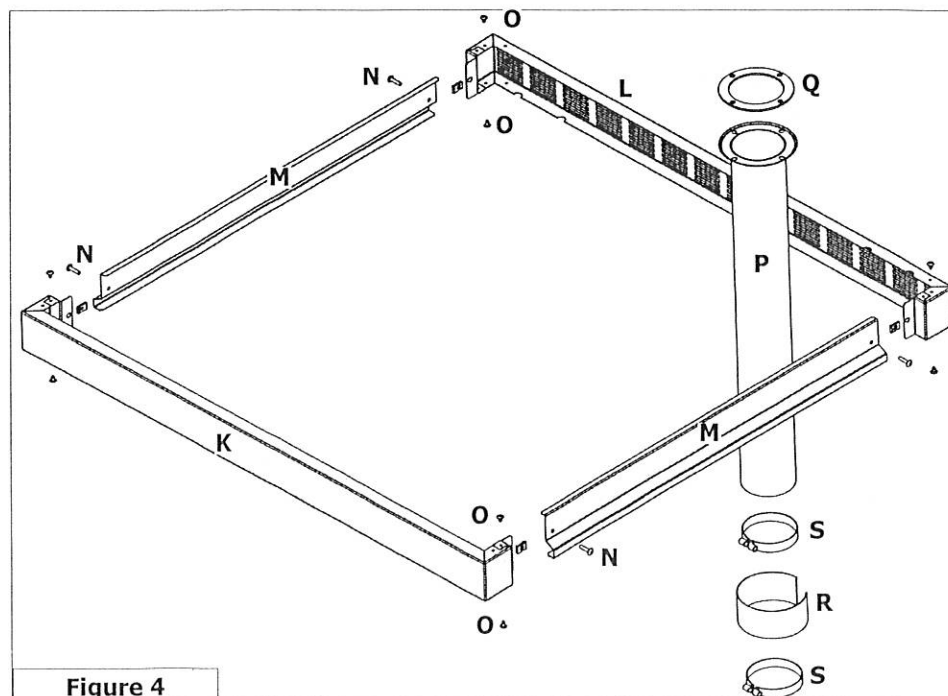

D. TOP OVEN

REMOVE PANELS



1. Remove side panels from top oven, each side panel is held on by 4 screws.
2. Drill out the 4 pilot holes using a 7mm drill and tap out the metal circle to allow fitment of the Vent Extension 'P'. See Fig 5.
3. Remove side panel support bracket by vent tube on top oven to allow access for fitting vent extension.

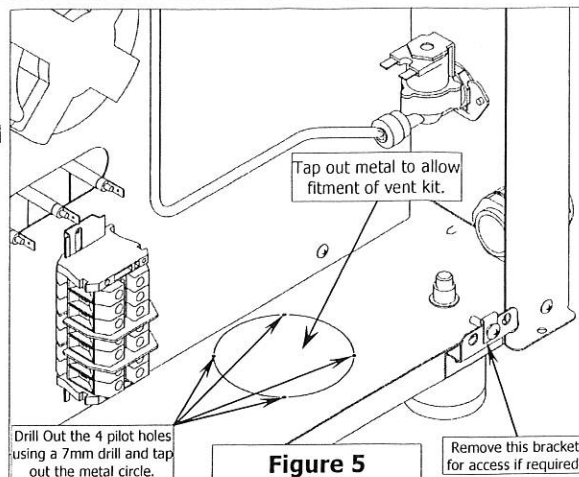

E. STACKING

STACK

1. Remove feet from the top oven.
2. Place top oven on top of stacking kit fitted to bottom oven. Secure in place with Screw (O) in each corner of the oven.
3. Remove the RH Double Stack Side (M).
4. Remove Vent Bottom Plate from bottom of the vent pipe, 4 screws.
5. Fit and secure Vent Extension (P) and Gasket (Q) with 3/4 screws (screw closest to oven may be inaccessible), using Sealant (T) provided to ensure a good seal. See Fig 6.
6. Tighten all screws on the stacking assembly.
7. Place Connection Sleeve (R) over join in vent using plenty of Sealant (T) between vent and sleeve and secure using Hose Clamps (S). (Figure 7).
8. Refit the RH Double Stack Side (M).

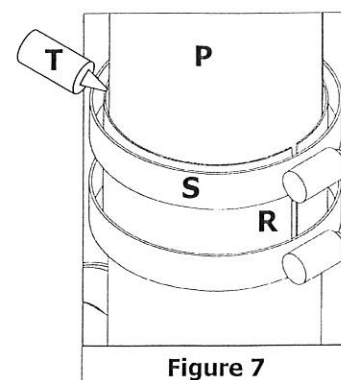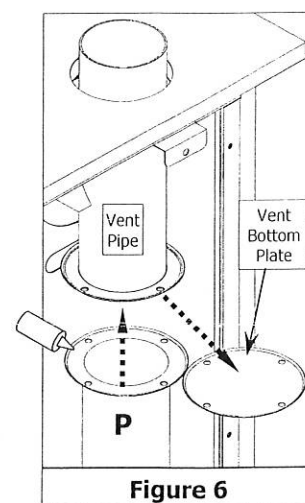

F RE-ASSEMBLY

1. Refit side panel support bracket removed at 'D 3' above, to the top oven.
2. Refit side panels to top and bottom ovens, using original screws.