



ASSEMBLY INSTRUCTIONS


ASSEMBLY

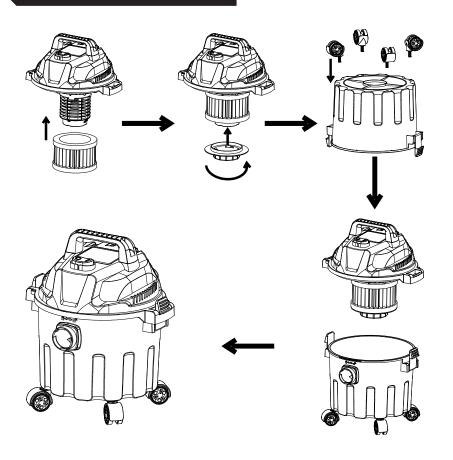

- 1) Attach the filter to the top cover.
- 2) Attach the wheels to the base.
- 3) Place the top cover onto the base.
- 4) Clip into place with tank locks.

HOSE CONNECTION





- 1) Insert hose connector into inlet and ensure that the connector is fastened tightly.
- 2) Loosen the screws on the handle to adjust height, tighten once set.