



LLMC[®] Modular Charging Cabinet Assembly Instructions

Tools Required:
Phillips Head Screwdriver




Parts Key

A x1




Charging Cabinet

B x1



Cord Wrap

C x2





Bolt,
Phillips Head

D x4




Thumbscrew



- 1 Position cord wrap on the rear of the cabinet, over the corresponding threaded mount holes.

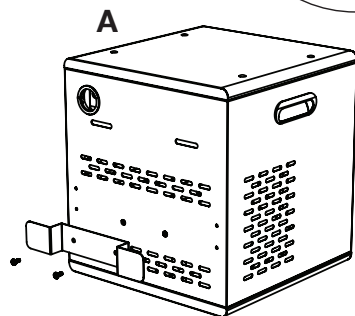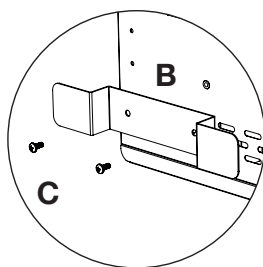



- 2 Insert each bolt into a lock washer, then a flat washer, then use to attach the casters to the Dolly.

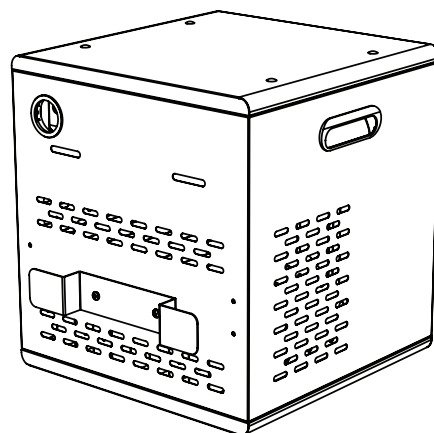


- 3 Remove the drawer from the bottom/lower cabinet by pressing the release lever on each side of the drawer track.

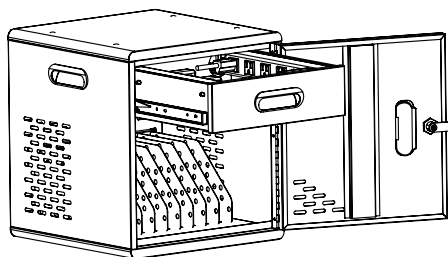


- 4 Remove the rubber caps from the top of the cabinet.

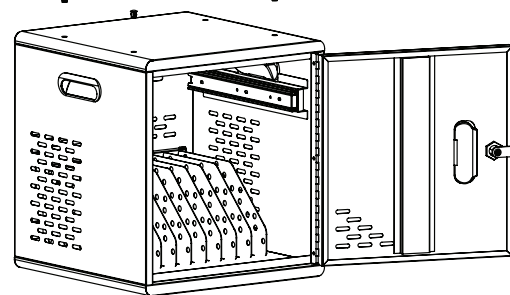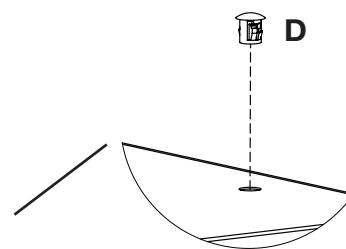

- 5 Position a second cabinet on top, aligning the threaded mount holes.

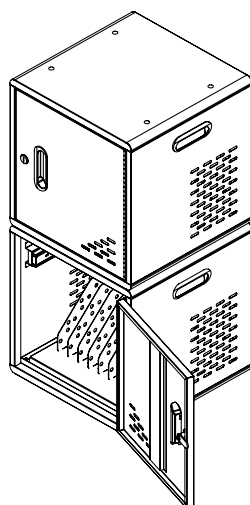


- 6 Using the thumbscrews attach the lower Cabinet to the upper Cabinet.

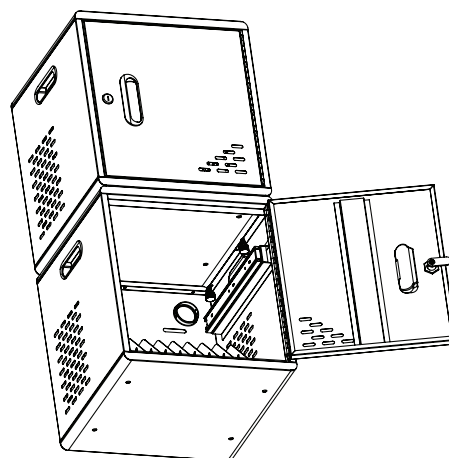


LLMCSP Modular Charging Cabinet – Single Dolly Assembly Instructions

Tools Required:
Phillips Head
Screwdriver



Parts Key

A x2




Caster, Locking

B x2



Caster, Non-Locking

C x16



Bolt, Phillips Head

D x16



Lock Washer

E x16



Flat Washer


F x4





Thumbscrew

- 1** Flip the Dolly over and position the casters over the corresponding threaded mount holes.

IMPORTANT: Position the locking casters on the end next to the power strip.


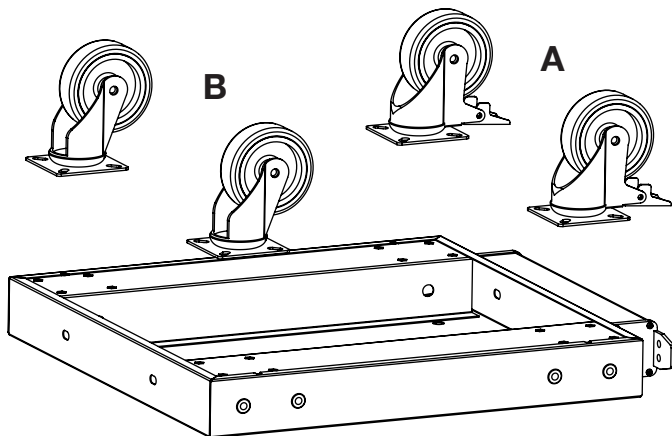


- 2** Insert each bolt into a lock washer, then a flat washer, then use to attach the casters to the Dolly.

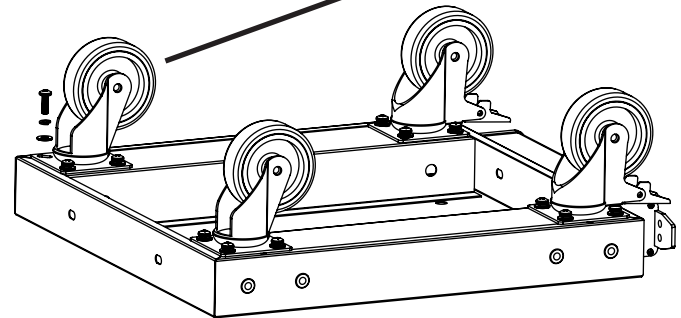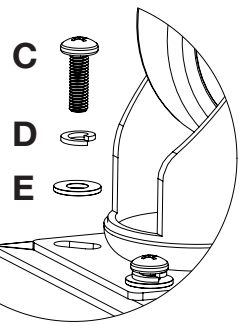

- 3** Using the thumbscrews, attach the Modular Charging Cabinet.

IMPORTANT: Position the Charging Cabinet so the cabinet door faces perpendicular to the edge of the Dolly with the power strip.

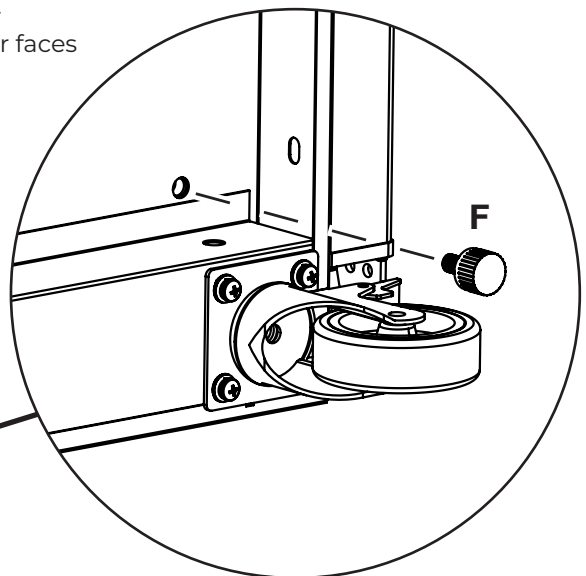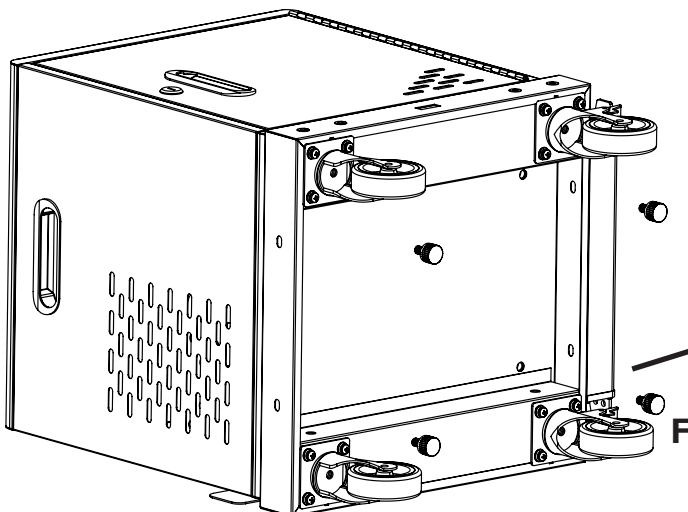


LLMCPH Modular Charging Cabinet – Dolly Handle Assembly Instructions

Parts Key

B x4

A x1

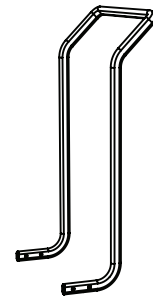

Handle




Bolt, Socket Head

C x4



Split Washer

- 1** Line the handle up with the corresponding threaded mount holes on the sides of the Dolly.
NOTE: While the handle can be attached to either end, it's generally best to attach the handle to the end with the power strip and caster locks.

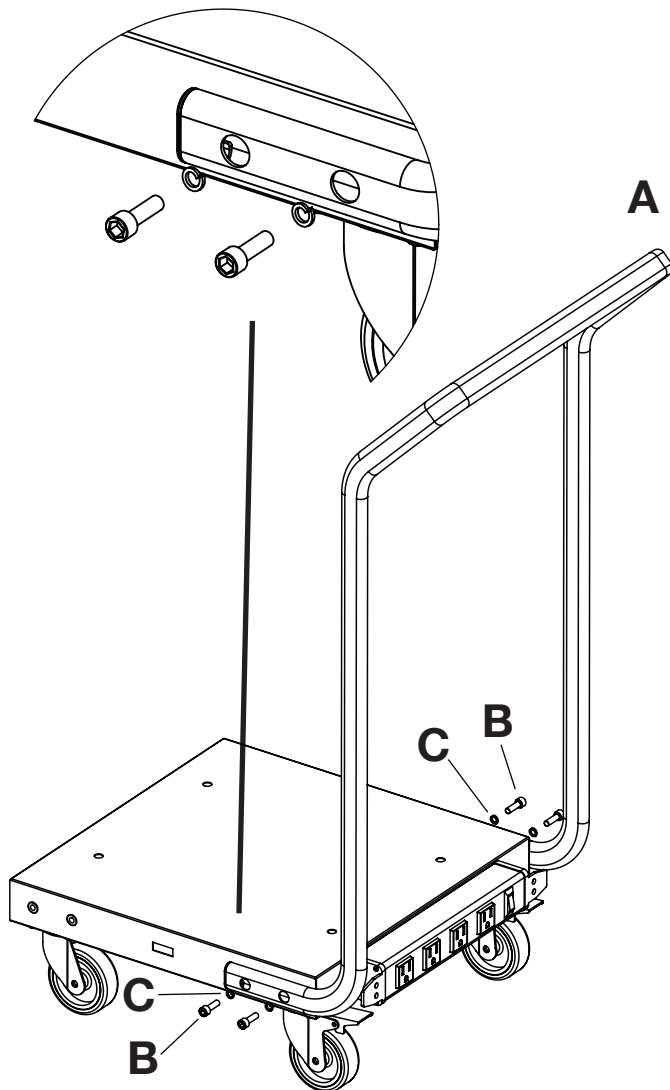

- 2** Use the socket head bolts and split washers to attach the handle to the Dolly.

