

Double Ring Barstool


ASSEMBLY INSTRUCTIONS



LANCASTER™
TABLE & SEATING

PARTS LIST:

A Frame with Swivel Plate

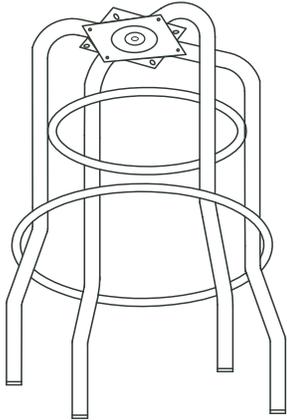

B Cushion



C Bolts 4/PC



Allen Key 1/PC



NOTES:


1. Before starting, make sure you have all of the required pieces.
2. A screwdriver is required for assembly (not included). A drill is optional for easier assembly.
3. Use caution when assembling the frame as the swivel plate has moving parts.

STEP 1

Ensure you have all of the required pieces for assembly: frame, cushion, 4 bolts, and an allen key.


STEP 2

Rotate swivel plate on top of the frame (A) so that all four holes are accessible.

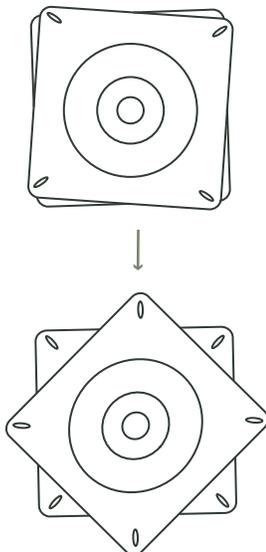

STEP 3

Place cushion (B) on a flat surface, with the bottom side facing up. Place swivel plate and frame on top of cushion and align holes in swivel plate with holes in cushion.

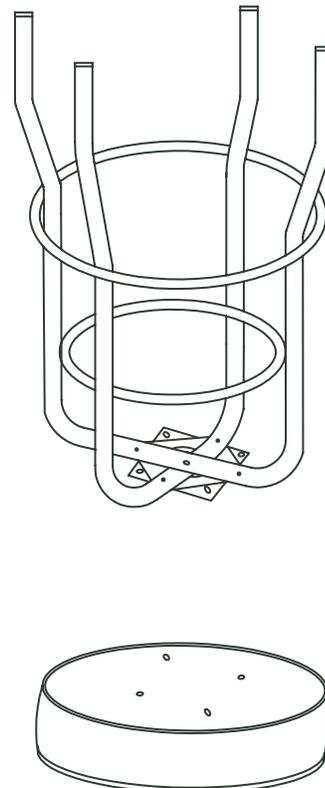

Double Ring Barstool


ASSEMBLY INSTRUCTIONS



LANCASTER™
TABLE & SEATING

STEP 4

Secure a bolt (C) into each hole on the swivel plate using the provided allen key (D).

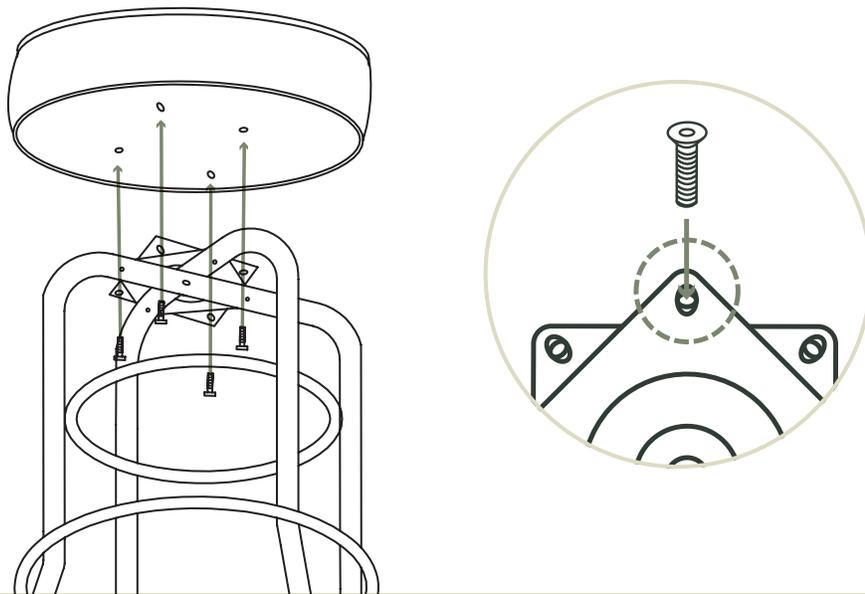

STEP 5

Ensure all bolts are fully tightened. Carefully flip barstool right side up for use.

