

Ground Mounting Kit

ASSEMBLY INSTRUCTIONS



LANCASTER™
TABLE & SEATING

HARDWARE:



(A) (4) 10 mm x 80 mm expansion screws



(B) (4) Flat washers



(C) (4) Hex nuts

TOOLS REQUIRED:


- Wrench (not included)
- Shovel or auger (not included)
- Impact drill (not included)
- Hammer (not included)

STEP 1

Before beginning the mounting process, ensure you have all necessary parts and tools.



STEP 2

Choose your desired mounting location for your Lancaster Table & Seating slatted steel trash can. Using the bottom of the trash can, mark your four hole locations on the ground surface.

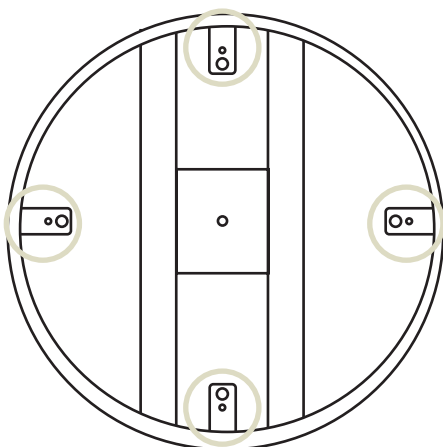


STEP 3

Using a 1/2" concrete drill bit (not included), drill holes in the marked locations approximately 2 3/8" deep. Make sure the expansion screws each have a washer and a nut attached. After all holes are drilled, insert an expansion screw into each hole. You may need to use a hammer (not included) to tap the screw into the ground. A portion of the screw should still be above the ground.




STEP 4

Using a wrench (not included), tighten the hex nut on each expansion screw by rotating it in a clockwise motion. This step allows the screw to expand completely in the ground.

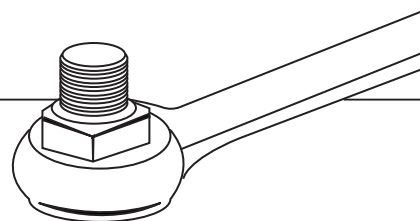

STEP 5

Remove the hex nut and washer from each expansion screw by rotating the wrench in the opposite direction as before. Carefully line up the trash can bottom with the exposed tops of the four expansion screws and lower the trash can onto the screws. Once the can is in the desired position, place a washer and a hex nut on each of the expansion screws and use a wrench to tighten.

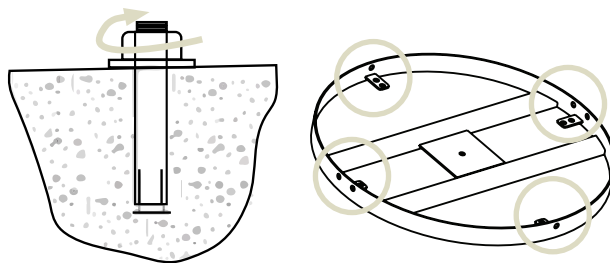

STEP 6

You may now insert your trash can liner and attach your trash can lid. Your trash can is now firmly mounted to the ground.