

Engineered for safety

Every new FlameShield Safety SystemSM equipped Midwest Can fuel container is engineered with a special internal flame mitigation device and our vapor locking Quick-Flow SpoutTM. This exclusive safety system provides consumers with a double layer of protection from accidental fires that can result when improperly handling and storing gasoline and other flammable liquids*.

*FlameShield Safety SystemSM consists of the vapor-locking Quick-Flow SpoutTM plus the internal flame mitigation device. For maximum protection they must be used together as one system. Removing or disabling either prevents the FlameShield Safety SystemSM from being effective.

Use only parts or accessories made by Midwest Can Company with this fuel can. Parts or accessories from other manufacturers could alter the safety of this product. Midwest Can Company disclaims all liability for injuries caused by use of unauthorized parts or accessories with the product.

The FlameShield Safety SystemSM provides a **double layer of protection!**



Gasoline & Fire Never Mix

There is no safe way to start a fire with gasoline. That's why most parents don't do it.

Help us let every parent know: **StopGasFires.org**



For help and safety video


Scan or visit us online at

www.midwestcan.com

Emission Control Information

This container complies with the U.S. EPA and CARB emission regulations for portable fuel containers (40 CFR PART 59 and 13 CCR 2467 ET. SEQ) The emission warranty is valid for a minimum of one year from date of purchase against failures and defects in materials and workmanship which may result in non-compliance. Classified to ANSI/ASTM F852

KEEP OUT OF REACH OF CHILDREN • MANTENER FUERA DEL ALCANCE DE LOS NIÑOS

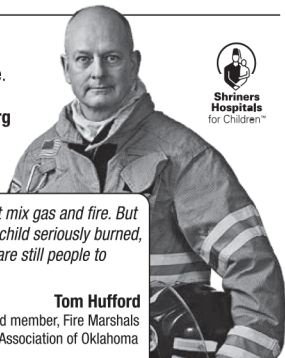

Most parents don't mix gas and fire. But every time I see a child seriously burned, I remember there are still people to reach.


Tom Hufford

Board member, Fire Marshals
Association of Oklahoma



A. Squeeze and twist tab on black screw cap to remove spout. **B.** 1) Using cap, tighten spout onto can. Remove dust cap and store. 2) **Vent before using.** To vent: Slowly loosen black cap until you hear pressure release. After venting, re-tighten spout before use.

A. Apretar tapa negra y dar vuelta para abrir. **B.** 1) Usando la tapa negra, apretar caño a el bote de gasolina. 2) Ventilar antes de usar. Para ventilar, a flojar tapa negra con cuidado hasta escuchar liberación de presión.



C. Before use: Place on flat surface and click in **red** safety lock. This will un-lock your spout for use. **D.** To use: Place tip of spout inside tank, rest notch on tank lip, push downward to retract spout. This will start flow. Remember to click in **red** safety lock before each use. When using, never point at yourself or anyone else.

C. Antes de usar: Colocar caño sobre una superficie plana y haga clic en el cantado de seguridad **rojo**. Esto desbloquea el caño para uso. **D.** Para usar: Poner la punta del caño dentro de el tanque, empujar hacia abajo. Esto comenzara a fluir. Recordar de hacer clic a el candado de seguridad **rojo** antes de cada uso. Nunca apuntarle a nadie ni a si mismo con el caño.

CAUTION! See figure B.

Vapors can build up inside can and become dangerous. Please always remember to vent can before using.

Por favor recuerde siempre ventilación puede antes de usar. Pueden generar vapores de su interior puede y llegar a ser peligroso.

Midwest Can with Quick-Flow SpoutTM

- 1 Year Warranty
- Child Resistant Features
- Self Venting
- Automatically Stops Flow
- No More Spills

Quick-Flow SpoutTM provides up to 2.5x faster flow