


ADAPTABILITY IS ONE OF OUR BEST FEATURES.

Our disposers include two types of stainless steel collar adaptors and a sink flange adaptor to accommodate any size sink opening. Customize your disposer and clean up operation by choosing from a variety of bowl sink assemblies designed for dish tables or drainboards.



Use This Chart to Select the Correct InSinkErator Mounting Adaptor


- Disconnect existing disposer from sink bowl or cone.
- Find the diagram that matches your sink bowl or cone.
- Measure the A and B dimensions (also C, D and E if indicated).
- Match the manufacturer and dimensions to find the adaptor number to order.



A – Diameter (sink or bowl opening)

B – Diameter (outside flange)

Normally Used By	A	В	ISE Ring Adaptor #	Special Information
ISE, Waste King, Toledo, National	4 1/2"	5 1/8"	11327A	Discard previous adaptor parts.
FMC, Avant	4 5/8"	5 1/8"	11378	Re-use split ring.
FMC, Avant	5 1/4"	5 11/16"	11327C	Discard previous adaptor parts.
Bus Boy	6"	6 1/8"	11327K	Discard previous adaptor parts (has 3-piece split ring).
ISE, Toledo	6"	7 3/16"	11327B	Discard previous adaptor parts.
Standard ISE mounting	6 5/8"	7 1/8"	11599E	Discard previous adaptor parts.
National, Hobart, Toledo	7"	7 3/8"	11327G	Discard previous adaptor parts. National mounting has ten bolt circle on split ring.
Salvajor	7"	7 3/4"	11599A	Discard previous adaptor parts (split ring supplied).
ISE, Toledo	8"	9 1/4"	11327	Discard previous adaptor parts (split ring supplied).




A – Diameter (sink or bowl opening)

B – Diameter (outside flange)

E - Diameter (bolt hole circle)

Normally Used By	A	В	E	No. of Bolt Holes	ISE Ring Adaptor#	Special Information
Waste King, Red Goat	4 1/2"	6 1/2"	5 1/2"	6	11599	Discard previous adaptor parts. Use existing bolt holes.
American Delphi, Atomic	6"	7 1/2"	6 1/8"	6	11378D	Discard previous adaptor parts. Use existing bolt holes.
National, Hobart	7"	0 /1 0 /10 110001	Discard previous adaptor parts.			
Hobart	9"	12 1/8"	11 1/8"	8	11327E	Discard previous adaptor parts. Use existing bolt holes.



Normally Used By	A	В	ISE Ring Adaptor#	Special Information
Waste King	6"	6 ½"	11327D	Loose ring on sink not used with this adaptor (O.D. of loose ring is $7\frac{1}{2}$ " with six bolts – 7" bolt hole circle diameter).


A – Diameter (sink or bowl opening)

B – Diameter (outside flange)

4
MEASURE 1
FROM ABOVE
(INSIDE BEND)
$ \leftarrow A \longrightarrow $
LOOSE RING (RE-USE)


Normally Used By	A	С	ISE Ring Adaptor #	Special Information
Waste King, Bus Boy	5 1/8"	6 1/2"	11327H	Re-use existing clamping ring.
Waste King, Bus Boy	5 %"	6 %"	11327H	Request #11307 clamping ring if existing clamping ring cannot be used.

- A Diameter (sink or bowl opening)
- C Diameter (inside bend)




Normally Used By	A	С	E	No. of Bolt Holes	ISE Ring Adaptor#	Special Information
Hobart	4 1/2"	6 1/8"	5 ½"	6	11327H	Discard previous adaptor parts.

- A Diameter (sink or bowl opening)
- C Diameter (inside bend)
- E Diameter (bolt hole circle)



Normally Used By	A	С	ISE Ring Adaptor#	Special Information
Hobart	5"	5 %"	11327J	Discard previous adaptor parts (clamping ring supplied).
GE	6"	6 3/8"	11378E	Discard previous adaptor parts – has snap ring groove on outside of sink throat.

- A Diameter (sink or bowl opening)
- **C** Diameter (inside bend)



Normally Used By	A	D	ISE Ring Adaptor #	Special Information
Red Goat, Insinger	4½"	1 1/8"	11378C	4¾" rubber connection sleeve and clamping bands. Support legs required.
Waste King	6"	1 1/8"	11378A	61/4" rubber connection sleeve and clamping bands. Support legs required.
Red Goat, Insinger	7"	1 1/8"	11378B	71/4" rubber connection sleeve and clamping bands. Support legs required.
Master	8"	1"	11599K	81/4" rubber connection sleeve and clamping bands. Support legs required.

- A Diameter (sink or bowl opening)
- **D** Diameter

RAISED BEAD

	Normally Used By	A	D	ISE Ring Adaptor#	Special Information
<u></u>	Salvajor	4 7/16"	1"	11599N	Has raised bead on outside of sink throat.
7	Salvajor	6 %"	1"	11599H	Support legs required.

- A Diameter (sink or bowl opening)
- **D** Diameter

TRUSTED BY FOODSERVICE CONSULTANTS AND EQUIPMENT DEALERS.

Whether you serve 25 or 2500 people, there's an InSinkErator disposer that's right for you.


InSinkErator Commercial Disposer Sizing Chart

To determine the proper size disposer, use this recommended sizing chart. Sizing recommendations are given in general terms; actual capacities vary depending on the volume and type of food waste. LC-50 model available for light duty commercial applications, such as coffee shops, convenience stores, or quick service restaurants.

For questions or special applications, contact your Foodservice Consultant or InSinkErator.

	High Buffet/Cafeteria Government	SS-300	SS-300/500	SS-500	SS-500/1000	SS-500/1000
Processed —	Medium Full Service Restaurant	SS-200	SS-300	SS-300/500	SS-500	SS-500/1000
		SS-100/150	SS-200	SS-300	SS-300/500	SS-500
Volume	Low Limited Service Restaurant/Café/ Fast Casual		SS-100/150	SS-200	SS-300	SS-300/500
		Light Majority Fruits & Vo		Medium 50/50 Mixture	,	Heavy ty Meats & Seafood

Six Stainless Steel Models from 1 HP to 10 HP in three sizes:

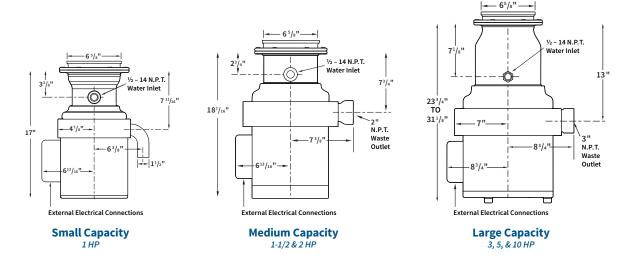

From food waste disposers and reduction systems to hot water dispensers and water saving systems, InSinkErator has a commercial equipment solution to enhance your day-to-day foodservice operations.



