

# Dish Table


## Assembly Instructions

### TOOLS REQUIRED

Allen wrench (included)

### PARTS:

- (A) Dish Table Top
- (B) Legs with Bullet Feet
- (C) Cross Braces & Aluminum Joint Socket
- (D) Set Screws

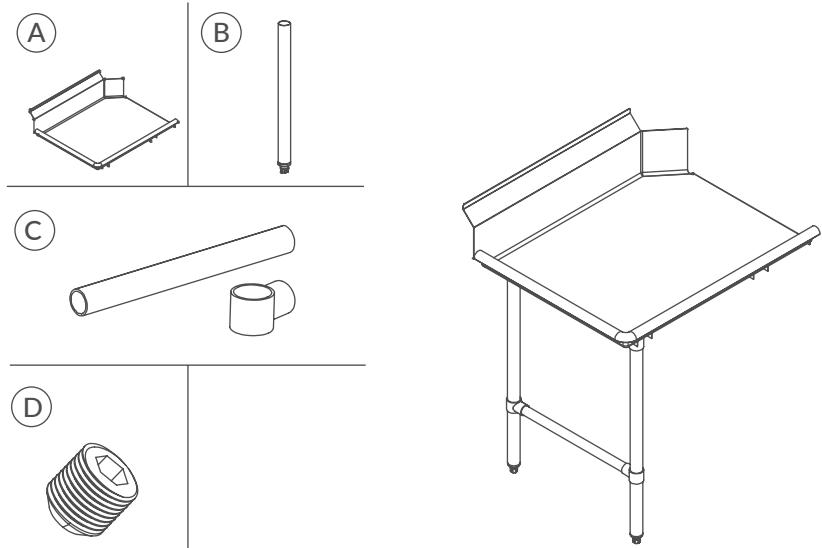

## Assembly Instructions

1. Find a level, secure area to assemble the dish table and make sure the assembly area is clean.
2. Carefully remove all the contents within the box. Ensure all parts from the list are included and not damaged.
3. Place the dish table top (A) face down on a rug, carton, or other protected surface.
4. Insert the legs (B) into the table top gussets. You may need to loosen the set screws (D) if any of the legs struggle to go in.
5. Partially tighten the set screws (D). Do not fully tighten yet.
6. On each of the legs (B), mark the height where you will be installing the cross braces (C). The mark should be at least 6" off the ground to meet NSF standards.
7. Once marked, slide the cross braces (C) onto the legs and fully tighten all set screws (D).
8. Adjust the bullet feet as needed to meet the height requirements or to compensate for uneven flooring.
9. With assistance, turn the dish table over and remove any protective film. The table is now ready to be connected to your dish machine.

**WARNING!** Risk of personal injury. Stainless steel edges are sharp and can cause cuts. Wear gloves during installation and handle with care. Cross braces must be installed for proper stability.