

ASSEMBLY GUIDE

Steelton™

KNOCK DOWN CAN RACK

INCLUDED PARTS

- A** (2) Side Frames
- B** (9) Shelves
- C** (36) Hex Flange Head Screws

TOOLS NEEDED

- **Screwdriver**
- **2 Benches** (something to set your rack on to install parts)

NOTES

Metal edges may be sharp. Handle with caution.

1

Remove all contents from packaging. Inspect the parts for any damage prior to installing. Damaged parts should not be installed.

2

Put one of the frames on two benches or your workspace. Ensure your screws can go through the bottom of the side frame.

3

Put your shelf pieces on your side frame and align the screw holes of the shelves with the screw holes of the side frame.

4

Insert the 5/16-18x2" Hex Flange Head Screws from the side frame holes on the bottom. Do Not Tighten.

B

A


C

Benches

ASSEMBLY GUIDE

5

Once the shelves are in the side frame place the other side frame on top of the shelves that have been screwed in. Align the screw holes of the other side frame with the shelves and insert the screws from the top.

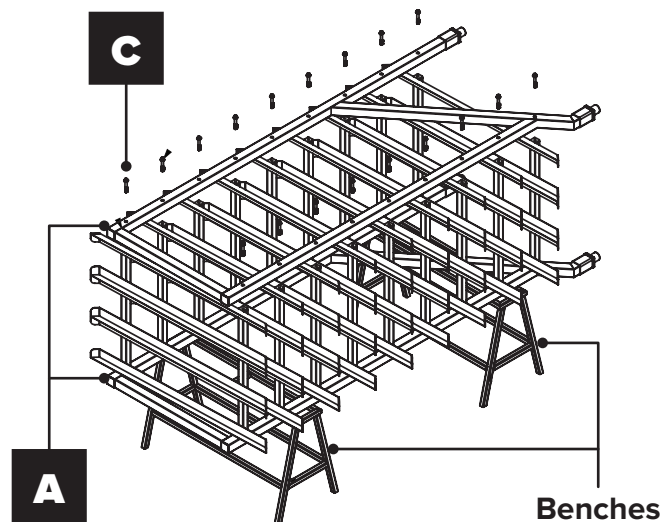

6

Tighten the screws, be sure not to overtighten. Stand the rack up and adjust it horizontally. Tighten all the screws with a wrench and installation will be complete.

