



PROJECT
TYPE
CATALOG #

## THIN THERMOPLASTIC LED EXIT SIGN

### ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LED.

### ELECTRICAL

- Dual 120/277 voltage standard.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 1.2V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Specification-grade, low profile thin plastic design.
- EZ snap-out chevron directional indicators.
- Available specifically in single or double face only.

### MOUNTING


- Mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

### WARRANTY/LISTING


- Five year warranty on all electronics and housing. Battery pro rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C - 50°C).

### PRODUCT PARAMETER

Model	No. of Faces	Housing Color	Letter Color	Battery
02-X1GB-BB	Single Face	Black	Green	Blank AC Only
02-X1GW-BB	Single Face	White	Green	EM Battery Backup
02-X1RB-BB	Single Face	Black	Red	
02-X1RW-BB	Single Face	White	Red	
02-X2GW-BB	Double Face	White	Green	
02-X2RB-BB	Double Face	Black	Red	
02-X2GB-BB	Double Face	Black	Green	



### DIMENSIONS

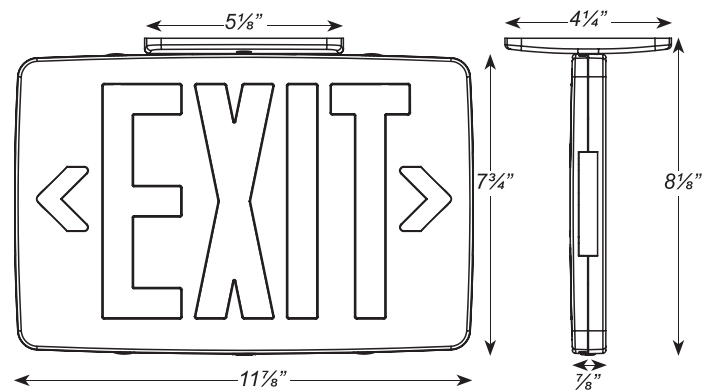

### ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
EZTXTEU-RED/GREEN/EM	1.0	1.0	0.10	0.10