




**CONTRACTOR
LIGHTING & SUPPLY**
WWW.CONTRACTORLIGHTING.COM

PROJECT
TYPE
CATALOG #

NEW YORK CITY APPROVED ALUMINUM LED EDGELIT EXIT SIGN



DIMENSIONS

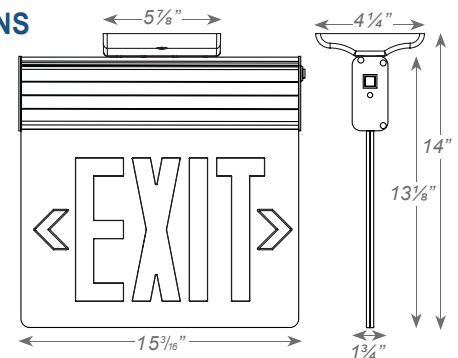

ELECTRICAL

- Dual 120/277 voltage standard. Optional multi-tap 208/220/240 voltage available.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Aluminum mounting canopy included for top or end mount.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Batteries pro-rated for five years.
- UL Listed for damp locations (0°C - 50°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

HOUSING

- Premium-grade, extruded aluminum housing (also available in black or white powder-coated finishes).
- Self-adhesive chevron appliques and guide template provided for directional indication.

OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual test to ensure reliable operation and meet electrical and life safety codes.
- SPV: UL Listed for special voltage option.

ILLUMINATION

- Ultra-bright, energy efficient, long-life Red LED.
- UV-stabilized ultra-clear acrylic edgelit panel provides consistent, uniform illumination.
- Double face utilizes factory installed silver or white mylar background panel.
- New York City approved 8" EXIT letters.

ORDERING INFORMATION

MODEL	NO. OF FACES	LETTER COLOR	PANEL	HOUSING COLOR	BATTERY	OPTIONS
02-NYX-ED	1 Single Face 2 Double Face	R Red	C Clear ¹ M Mirror W White	W White B Black A Aluminum	Blank AC Only EM Battery Backup	SDT Self-Diagnostics ³ SPV 208/220/240 Volt, 50/60Hz ²

¹ With single face only.

² Not available with SDT options.

³ Available only with Em units.



CONTRACTOR
LIGHTING & SUPPLY
WWW.CONTRACTORLIGHTING.COM

PROJECT
TYPE
CATALOG #

NEW YORK CITY APPROVED ALUMINUM LED EDGELIT EXIT SIGN

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)					INPUT AMPS (A)				
	208V	208V	208V	208V	208V	208V	208V	208V	208V	208V
02-NYX-ED-EM-SPV	3.6	4.0	3.9	3.93	3.98	0.030	0.020	0.023	0.022	0.021
02-NYX-ED-SDT	3.6	4.0	-	-	-	0.030	0.020	-	-	-