

MULTI-TURN ANGLE STOP

Female Iron Pipe x Compression



EASTMAN[®]
SPEED-FLEX[®]

*Peace of Mind...
for the Professional Plumber*

TECHNICAL DATA

DESCRIPTION: Multi-Turn Angle Stop
FIP x Compression

CONSTRUCTION:

Body - Chrome Plated No-lead Brass

Stem - Celcon

Handle - Oval - Chrome Plated Zinc

Compression Nuts - Chrome Plated No-lead Brass

Compression Sleeve - Brass

PART#	"A"	"B"	Inner/ Master	Pack	UPC
04319LF	3/8" FIP	3/8" OD	24/96	Box	091712420958
04336LF	3/8" FIP	1/2" OD	24/96	Box	091712421016
04129LF	1/2" FIP	1/4" OD	24/96	Box	091712426615
04322LF	1/2" FIP	3/8" OD	24/96	Box	091712383970
04338LF	1/2" FIP	1/2" OD	24/96	Box	091712421047

TECHNICAL SPECIFICATIONS:


Working Pressure - 125 PSI

Working Temperature - 40° F to 140° F

Connectors are lead free and contain a weighted average lead content of ≤ 0.25%.

MADE IN: China

ROUGH IN DRAWING

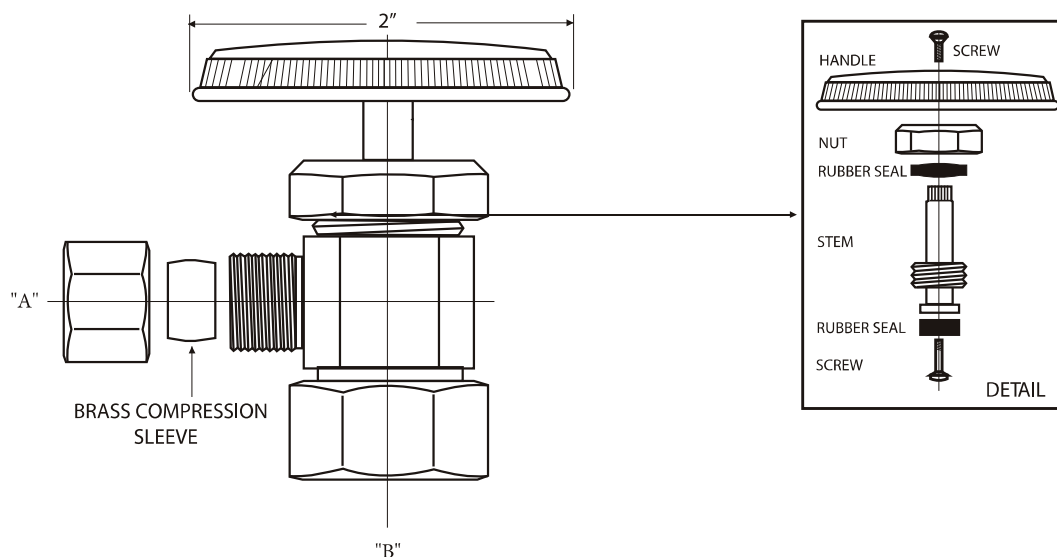

ALL DIMENSIONS SHOWN ARE NOMINAL

Meets requirements for NSF-61



Approved



Complies with Low Lead Plumbing Laws