
CEILING MOUNTED WARMERS

"We pride ourselves in having the fastest leadtimes in the industry"



"Custom finishes are our specialty"

SHADE STYLES

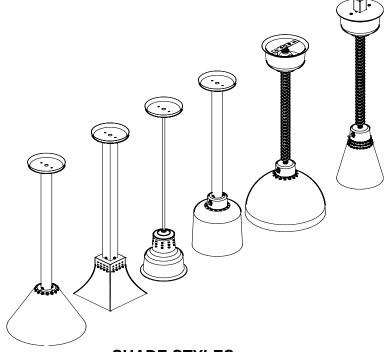

140 mm X

191 mm

6.5" X 7.5"

Length

165 mm X

191 mm



Length Length 181 mm X 279 mm X 191 mm 203mm



187mm


MOUNTING OPTIONS

Diameter X Length 165 mm X 203mm

7.0" " X 8.0" Diameter X Length 178 mm X 203mm

STYLE-800 11 1/8 " X 8.0" Diameter X Length 283 mm X 203mm

STYLE-900 6.5 " X 8.5" Diameter X Length 165 mm X 216mm




TYPE "SMT" Rigid ceiling. 3/8" diameter down tube 78" maximum overall length. down tube length




TYPE "LGT" Rigid ceiling 1 1/2 " diameter tube. . 78" maximum overall length. Please specify Please specify down tube length



TYPE "BC, WC" TYPE "LGTS" Cord mount. or white. Please specify cord length



Rigid ceiling with Cord color black switch. Switch holder dimensions 2 7/8" diameter x 2" tall. 1 1/2 " diameter tube.. 78" maximum overall length.



TYPE "RET" Retractable cord ceiling mount. Height adjustable from ceiling 30"-78". Switch standard.



TYPE "RETT" Retractable cord track mount. Height adjustable from ceiling 30"-78". Switch standard

Hanson Brass Products 7530 San Fernando Road, Sun Valley, California, 91352 Toll Free (888) 841-3773, Fax (818) 767-7891 Website: www.hansonbrass.com


CEILING MOUNTED WARMERS

Description: Single warmer fixture available in five distinctive shades styles to match any decor. All fixtures are constructed using the finest materials and components available.

Lamp body and switch holder are constructed from heavy gauge spun aluminum. Standard finish is black powdercoat. Satin aluminum, brass, copper, plated chrome available. Custom finishes are also available). All finished surfaces have a clear baked enamel topcoat that is easy to clean and also eliminates tarnishing and need to polish. All internal components including lamp socket and wiring are high temperature rated (200°C). Each shade style is available with all mounting types providing a solution for any warming application. **Note**: All mounting options can be track

mounted. All mounting options can have switch. See below for I	r how to order
--	----------------

	Specifications
Mechanical	
Parameter	Value
Light head	Satin aluminum, brass, copper, plated chrome or powder coated plated spun aluminum
Light head sizes	Range from 6 ½-11" diameter x 7 3/8-8" long
Light head height from countertop	Infinitely adjustable depending on cord or ceiling down tube selected. Note: For retractable warmers adjustment is 30"-78" from ceiling
Ceiling down tube and all fittings	Solid brass
Switch holder(Optional)	Brass, copper, plated chrome or powder coated spun aluminum. 2 7/8" diameter x 2" tall
Ceiling cover	Brass, copper or chrome plated spun aluminum. Two types available low profile or deep mount.
Shipping weight	Approximately 4 pounds
Internal wiring	18 gauge Silver stranded with Teflon insulation. Rated (200° C)
Lamp socket	Glazed porcelain/nickel. Rated (200° C)
Switch(Optional)	On/Off rated 15 amps @ 115 VAC
Cord	115 VAC-18 gauge 3 conductor cable 230 VAC-18 gauge 3 conductor harmonized cable
Electrical	
Operating Voltage	115-230, VAC 50-60 Hz, single phase
Power	250 watts Maximum
Operating amperage	2.25 amps (115 VAC) 1.25 amps (230 VAC)
Lamp type	Infrared 250 watts maximum, shatterproof design.
Safety Listings	
Organizations	@ CE@

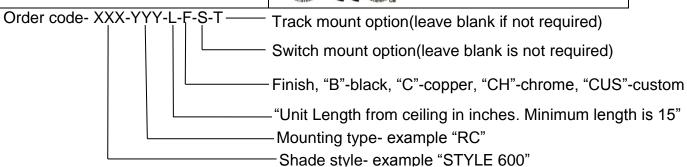

Examples-" 600-SMT-C-24" = Style 600 shade, rigid ceiling mount 3/8" diameter down tube, copper finish, 24" long "800-LGT-CUS-38-S-T" = Style 800 shade, rigid ceiling mount 1 ½" diameter down tube, custom finish, 38" long, switch option, track mount.

Hanson Brass Products 7530 San Fernando Road, Sun Valley, California, 91352 Toll Free (888) 841-3773, Fax (818) 767-7891 Website: www.hansonbrass.com