

TWO STATION A.D.A. WALL MOUNTED SINK WITH TUBULAR SUPPORTS

WITH/WITHOUT MANUAL FAUCET





"-F" Series Sink Includes K-161-LU Gooseneck Faucets with Wrist Handles











FEATURES:

8 1/2" high backsplash.

5" sink bowl depth.

Two stainless steel "Z" brackets supplied each unit.

One K-6 3 1/2" rear basket drain.

Two tubular stainless steel support brackets that allow full clearance underneath.

Manual Operated: Faucets sold separately.

"-F" Series includes two K-161-LU 3 1/2" gooseneck faucets.

CONSTRUCTION:

All TIG welded.

Welded areas blended to match adjacent surfaces and to a satin finish.

Die formed tubular wall brackets.

MATERIAL:

All 14 gauge type "304" stainless steel.

1 5/8" tubular "304" stainless steel wall brackets.

Stainless steel gussets.

MECHANICAL:

8" O.C. faucet holes punched at each station.

		# of Faucets Sink	# of Faucets		Cu.
Model #	Length	Accommodates	Included	Wt.	Ft.
FS-WM-40-ADA	40"	2	0	77 lbs.	15
			(Faucets Not Included)		
FS-WM-40-ADA-F	40"	2	2	81 lbs.	15
			(K-161-LU Faucets Included)		



MULTI-STATION ACCESSORIES & REPLACEMENT PARTS Model Description **™** K-6 3 1/2" Drain (1 1/2" I.P.S.) **F** K-13 Stainless Steel Soap Dispenser (Wall Mount Only) ₩ K-06 Splash Mount Faucet Mounting Kit **K-101** 8" Swing Spout Splash Mt. Faucet K-101 Splash Mounted 3-1/2" Gooseneck Faucet (8" O.C.) K-159 **K-159** Splash Mounted 6" Swivel Spout Faucet (8" O.C.) **K-160** K-160 **K-411** Strainer Plate for 3-1/2" Drain **K-1118** Extra H.D. 8" Splash Mounted Faucet K-316-LU Wrist Handles Faucet Hole Revision K-472 (Manual Faucet Operated Sinks Only) K-508 Special Sizing Charge (Larger Size Cut Down To Smaller Size) K-13 **TA-19** Adjustable Stainless Steel Wall Mount Flange

Ships UPS

Standard Faucets conform to NSF 61 Standard 9 and compliance to AB 1953 Standards.

MARNING: Equipment that include faucets on this page may contain a chemical known to the State of California to cause cancer, birth defects or other reproductive harm.




Customer Service Available To Assist You 1-800-645-3166 8:30 am - 7:00 pm E.S.T.

For Orders & Customer Service:


Email: customer@advancetabco.com or Fax: 631-242-6900


For Smart Fabrication™ Quotes: Email: smartfab@advancetabco.com or Fax: 631-586-2933 TOL ± .500" FITTINGS SUPPLIED AS SHOWN ALL DIMENSIONS ARE TYPICAL

FS-WM-40-ADA

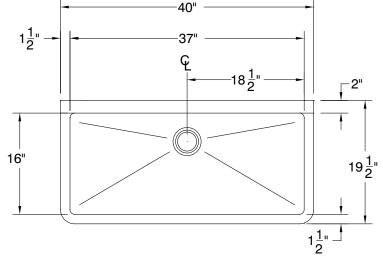







77 Lbs.

