



K-125 6" SWING SPOUT SPLASH MOUNT FAUCET

Conforms To NSF 61/9 Lead Free Requirements



**FAUCET AERATOR CONFORM TO
ASTM.A112.18.1M • 1.0 GPM/3.8 LPM
THREAD: 55/64 - 27 FEMALE**



BOTTOM VIEW
1/2" NPS (OUTSIDE THREAD)
3/8" NPT (INSIDE THREAD)

Item #: _____ Qty #: _____
Model #: _____
Project #: _____

FEATURES:

6" swing spout.
4" O.C. water supply.
Quarter-turn wedge style handles.
Colored hot & cold Indexes.
1.0 GPM/3.8 LPM Aerator. 60 PSI.

MATERIAL:

Brass chrome plated body & spout.
Chrome plated handles.

Options & Accessories

Replacement Spout For K-125 Faucet

6" Gooseneck Spout Only.

K-51SP



Low Flow Aerator

.5 GPM

K-08



Faucet Repair Kit*

K-00A (Set of 2)

Includes 2 Cartridges and 2 Handles
With Red & Blue Indexes



Wrist Handles*

K-316-LU (Set of 2)




*Can Only Be Used On Faucets Purchased After January 2016.
For Older Faucets, Consult Customer Service.



Click This Link To
View Assembly Sheet

DIMENSIONS and SPECIFICATIONS

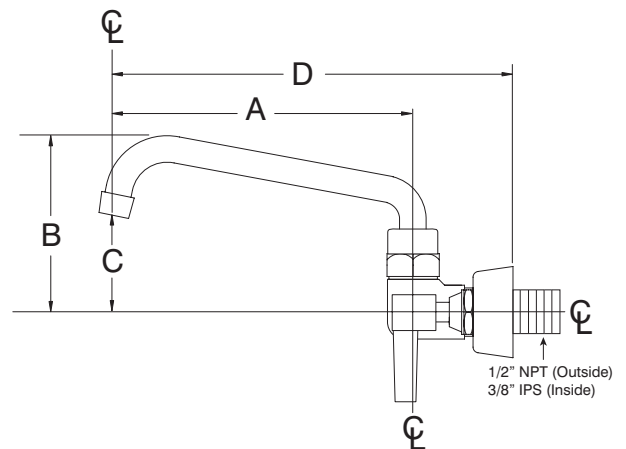

A Length	B Height	C	D	On Center Dimensions
6"	4"	2 1/2"	8"	4" O.C.

WARNING:

Faucet(s) on this page may expose you to chemicals, including lead, that are known to the State of California to cause cancer or birth defects or other reproductive harm. For more Info., visit www.p65warnings.ca.gov.



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 7:00 pm E.S.T.

For Orders & Customer Service:

Email: customer@advancetabco.com or Fax: 631-242-6900

For Smart Fabrication™ Quotes:

Email: smartfab@advancetabco.com or Fax: 631-586-2933