




K-126 10" SWING SPOUT SPLASH MOUNT FAUCET

Conforms To NSF 61/9 Lead Free Requirements



FAUCET AERATOR CONFORM TO
ASTM.A112.18.1M • 1.0 GPM/3.8 LP
THREAD: 55/64 - 27 FEMALE

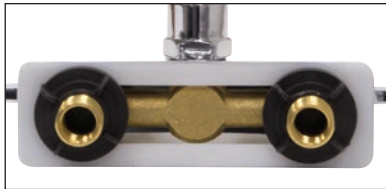

BOTTOM VIEW
1/2" NPS (OUTSIDE THREAD)
3/8" NPT (INSIDE THREAD)

Item #: _____ Qty #: _____
Model #: _____
Project #: _____

FEATURES:

10" swing spout.
4" O.C. water supply.
Quarter-turn wedge style handles.
Colored hot & cold indexes.
1.0 GPM/3.8 LPM Aerator. 60 PSI.

MATERIAL:

Brass chrome plated body & spout.
Chrome plated handles.

Options & Accessories

Replacement Spout For K-126 Faucet

10" Swing Spout Only.

K-126SP



Low Flow Aerator


.5 GPM

K-08



Faucet Repair Kit* K-00A (Set of 2)

Includes 2 Cartridges and 2 Handles
With Red & Blue Indexes



Splash Mount Faucet Mounting Kit K-06



Wrist Handles*

K-316-LU (Set of 2)

For a Complete faucet with Wrist
Handles, See our K-316 Spec Sheet.




*Can Only Be Used On Faucets Purchased After January 2016.
For Older Faucets, Consult Customer Service.



Click This Link To
View Assembly Sheet

DIMENSIONS and SPECIFICATIONS

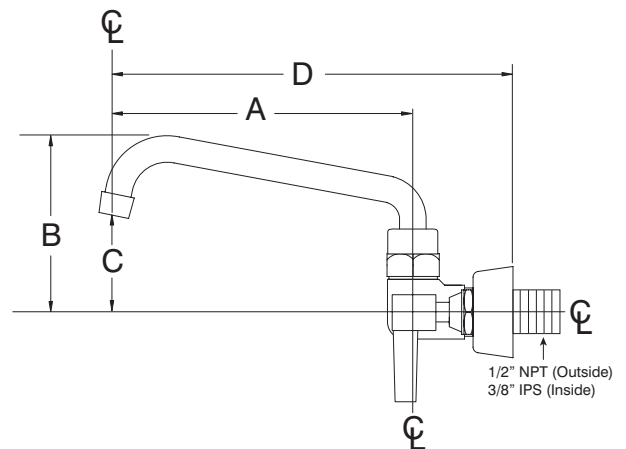

A Length	B Height	C	D	On Center Dimensions
10"	4"	1 1/2"	8"	4" O.C.

WARNING:

Faucet(s) on this page may expose you to chemicals, including lead, that are known to the State of California to cause cancer or birth defects or other reproductive harm. For more Info., visit www.p65warnings.ca.gov.



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 7:00 pm E.S.T.

For Orders & Customer Service:

Email: customer@advancetabco.com or Fax: 631-242-6900

For Smart Fabrication™ Quotes:

Email: smartfab@advancetabco.com or Fax: 631-586-2933