



AIRREX PORTABLE AIR CONDITIONER

HSC-36R

220V~60Hz,1Ph

Cool Solutions by Airrex!

Approved technology with 40 years experience in the Market! Airrex Spot Cooler 3-Ton 220V~60Hz,1Ph

Airrex spot coolers operate in air temperatures from 68°F to 115°F. These air conditioners utilize eco-friendly R-454B refrigerant. Airrex spot cooler air conditioners may require a fresh air supply for proper operation. Includes removable, washable air filters for easy maintenance. Thermostatically protected compressor includes high and low pressure warnings. Moves easily on four swivel casters (4 locking). 36,000 BTU Cooling feature two 7" diameter front cold air discharge and 16" diameter top warm air discharge.

Optional Warm Air Duct includes ducting and a 2' x 2' ceiling flange for warm air exhausting.

ETL listed. Condensate Pump that plugs directly into the portable air conditioner.

1 year warranty and 3 years on compressor.

Strong Points



Quiet



Thermostats



Intensive Air Conditioning



Movable & Lockable



Energy saving



Automatic



Time Setting



Certification



Hot Air Exhaust

Automatic fan speed controller
Operating Range : Up to 115°F



Spot Cooling

8" Nozzles
Directed Cooling
36,000Btu/h



Condensate Pump

Auto Shut off
(Built in)




Applications

Indoor or Outdoor
Cooling
Drying



Digital Controls

Programmable Timer
Temperature Range: 64°F to 86°F
Auto Restart



Mobility

(4) 5" Swivel Casters
(4) Locking Casters

PORTABLE CLIMATE
SOLUTIONS BY AIRREX



US Electrical Standards
(ETL)



CE Mark

TEMP-AIR
EQUIPMENT SALES
www.tempsales.com

HSC-36R Specifications




SPECIFICATIONS				Air-Cooled
				HSC-36R
Capacity Rating Condition	Cooling	(35°C/95°F 40%)	Btu/h	36,000 Btu/h
	Heating	(21°C/70°F 50%)	Btu/h	-
	Dehu	Max. (32°C/89°F 80%)	gal/day	47.9
		Nominal (27°C/80°F 60%)	gal/day	33.8
Electrical Characteristics	Voltage	60 Hz	Volts	1 Phase, 220 V~
	Power Consumption	Cooling	kW	4.18
		Heating	kW	-
	Current	Cooling	A	19.4
		Heating	A	-
	Fuse Size		A	250 V~, 10 A
Power Cord	Min. - Max. Voltage		V	187 - 242 V~
	NEMA Plug		-	6 - 30
	Gauge		-	12 AWG (3-core)
	Length		ft	10
Fans	Indoor	Fan Type	-	Centrifugal
		Cooling Air Volume (High/Low)	CFM	1,040
		Heating Air Volume	CFM	-
		Dehu Air Volume	CFM	1,040
		Max. External Static Pressure	inchH2O	0.6
		Max. Equivalent Duct Length	ft	40
		Type / Size	inch	Duct / 8" (Φ200) x2
Fans	Outdoor	Fan Type	-	Centrifugal
		Air Volume (High/Low)	CFM	1,760
		Max. External Static Pressure	inchH2O	0.7
		Max. Equivalent Duct Length	ft	70
		Type / Size	inch	Duct Flange / 16" (Φ400)
Sound Level	With Exhaust Duct	High / Low	dB(A)	65
	Without Exhaust Duct	High / Low	dB(A)	68
Air Filter	Type	Indoor	-	Alu+SUS mesh
		Outdoor	-	Alu+SUS mesh
Condensate	Tank	Capacity	gal	-
	Auto Pump		-	Included
Refrigerant	Type		-	R-454B
Weight	Net Weight		lbs	452
Dimensions	W x D x H		inch	29 x 38 x 57
Operating Conditions	Min. - Max.	Cooling	°F	68~115 (20~46°C)
		Heating	°F	-
		Dehumidification	°F	64~115 (18~46°C)
Safety Device	High Pressure Switch			○
	Low Pressure Switch			○
	Compressor 3min, Delay Timer			○
	Thermostat Protector for Compressor			○
	Fan Motor Protection			○
	Automatic Full Tank Shut-Off			○
	Tank Position Detector			-

※ Designs and specifications of products are subject to change without prior notice for the improvements. The colors of products may be different due to the printing process.

Hepa filter optional kit

Optional Filter kit (HSC-36P,60P,70P)

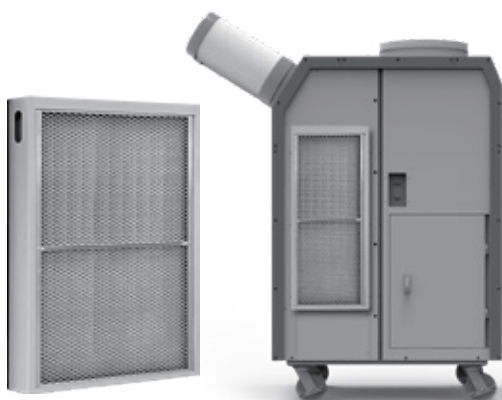

Ideal Applications for Airrex Portable Air Conditioner



Industrial Sites

High temperature work sites, car manufacturing plants, ship building yards and steel mills

Repair Shops

Car repair shops, aircraft workshops, farm machinery workshops, gas stations & parking facilities

Heat Generating Equipment

Server rooms and machine rooms

Leisure / Outdoor Event Venues, Farm, & Livestock Ranges

TEMP-AIR Sales Office Mailing Address:

📍 2031 Exchange Parkway Ste A, Waco, TX 76712

☎ 877-728-2133

🌐 www.tempairsales.com

✉ sales@tempairsales.com