DUAL GPR 120/240V w/SST Fnl, 3 Settings

Height: 29.3" Width: 18.0" Depth: 22.2" (74.4cm) (45.7cm) (56.4cm)



- Each 1.5GPR portable server (included) has a Safety-Fresh® brew-through lid with vapor seal and spill protection
- Adjustable bypass ensures perfect coffee regardless of batch size
- Brews 1/2, 1 or 1 1/2gal (1.9, 3.8 or 5.7L) batches
- SplashGard® funnels deflect hot liquids away from the hand

Agency:





Specifications

Product #: 20900.0011 Funnel: Stainless Steel

Faucet: Upper

Water Access: Plumbed

Interface: Cabled
Finish: Stainless

Additional Features

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr Input H ² C 236ml cups/hr Temp.		Input H ² O Phase Temp.		Hertz	
120/240	28.7	6890	No	-	309	60°F (15.5°C)	1	3	60	

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements


PSI	kPa	Fitting Supplied	Water Flow Required (GPM)	
20-90	138-621	1/4" Male Flare Fitting	-	


CAD Drawings

2D	Revit	KLC
•		

MARNING:



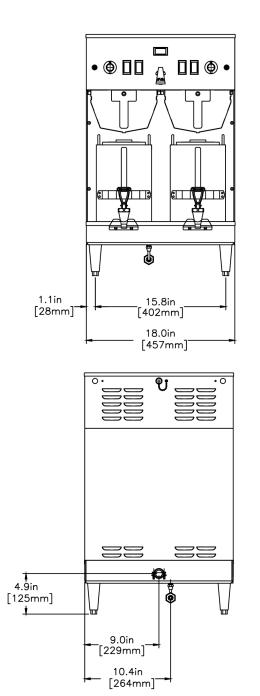

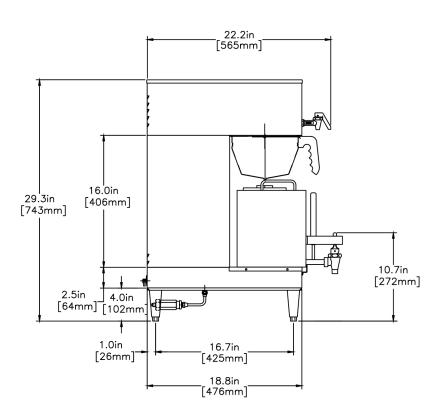


Unit				Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	29.3 in.	18.0 in.	22.2 in.	33.9 in.	21.4 in.	29.9 in.	95.350 lbs	12.518 ft ³	
Metric	74.4 cm	45.7 cm	56.4 cm	86.0 cm	54.3 cm	75.9 cm	43.251 kgs	0.354 m³	



Related Products & Accessories: DUAL GPR 120/240V w/SST FnI, 3 Settings(20900.0011)



















Serving & Holding Options: DUAL GPR 120/240V w/SST Fnl, 3 Settings(20900.0011)





