WORKTOP REFRIGERATOR

Model: SW32NBS-D

Natural Refrigerant R-290 Model

32" Worktop Refrigerator with Drawers and 5 1/2" Backsplash

Stainless steel front, top and end panels, aluminum back and interior.



Options and Accessories

(upcharge and lead times may apply)

| Stainless steel interior | Adjustable legs |
|--------------------------------|---|
| Stainless steel back | Drawers locks |
| Overshelves (single or double) | Special electrical requirements (consult factory) |

Consult factory for other model configurations, options and accessories.

Project Name: Model Specified: Location: Item No: Quantity:

Standard Model Features

SIS #:

REFRIGERATION SYSTEM

AIA#:

Performance-rated refrigeration system

Natural, environmentally-safe, high-efficiency R-290 refrigerant¹

Automatic, hot gas condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, back mounted compressor

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation

Smooth, polished chrome drawer handles

Stainless steel roll-out drawers

Magnetic snap-in drawer gaskets

Completely enclosed, vented and removable case back

5" casters

MODEL FEATURES

Electronic controller w/digital display & hi-low alarm

¹ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

| DIMENSIONAL DATA | |
|---|------------------|
| Net Capacity (cu. ft.) | 9.0 (253 cu I) |
| Width, Overall (in.) | 32 (813 mm) |
| Depth, Overall (in.) (incl. handles & bumpers) | 32 3/16 (818 mm) |
| Height, Overall (in.) (incl. 5" casters) | 40 3/4 (1035 mm) |

2

REFRIGERANT DATA

No. of Drawers (two tier)

| Condensing Unit Size (H.P.) | 1/5 |
|-----------------------------|------|
| Capacity (BTU/Hr)* | 1625 |

ELECTRICAL DATA

| Voltage (int'l) | 115/60/1 (220/50/1) |
|-------------------------------------|---------------------|
| Total Amps (int'l) | 2.46 (1.85) |
| 10 ft. Cord/Plug [attached] (int'l) | Yes (No) |

SHIPPING DATA

| Weight (lbs.) | 221 (100 kg) |
|-----------------------|------------------|
| Height - Crated (in.) | 48 3/4 (1238 mm) |
| Width - Crated (in.) | 40 (1016 mm) |
| Depth - Crated (in.) | 37 1/4 (946 mm) |

DRAWER PAN CONFIGURATIONS

Two Tier: (1) 12 x 20 x 6 pan per drawer or (1) 1/2 size x 6 & (2) 1/3 x 6 pans per drawer

* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2019. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

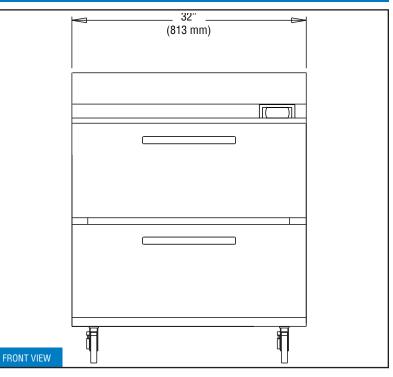

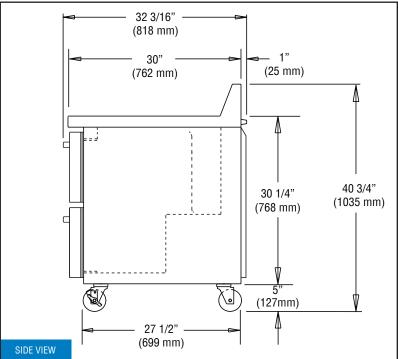

IMPORTANT NOTE: If the cabinet is located directly against a wall, a <u>minimum clearance of 3" is required on sides, front and rear.</u>