

APPLICATION:

PRODUCT NAME:

ADD-ON FAUCET WITH SWING SPOUT

JOB NAME:

☐ SPECIAL CONFIGURATION
☐ CHECK BASE MODEL AND OPTIONS

QUANTITY:

ITEM NO.

MODEL:

- ☐ 2901 WITH 6" SWING SPOUT
☐ 2901-8 WITH 8" SWING SPOUT
☐ 2901-10 WITH 10" SWING SPOUT
☐ 2901-12 WITH 12" SWING SPOUT
☐ 2901-14 WITH 14" SWING SPOUT
☐ 2901-16 WITH 16" SWING SPOUT

OPTIONS OR MODIFICATIONS:

- ☐ HANDLES (CROSS OR WRIST) CIRCLE STYLE
☐ VANDAL RESISTANT KIT
☐ OTHER _____

FEATURES

CONTROL VALVE


- * 3/8" MALE INLET
- * STEM - RIGHT HAND
- * HOT AND COLD INDEX BUTTONS
- * SWIVELLING SEAT DISK
- * STAINLESS STEEL SEAT
- * STAINLESS STEEL SEAT SCREW
- * STAINLESS STEEL HANDLE SCREW

SYSTEM LIMITS

- * TEMP: 40°F MIN. TO 140°F MAX.
- * PRESSURE: 200 PSI MAX. STATIC
- * 2.20 GPM AT 80 PSI

SHIPPING WEIGHT

- * 2.5 LBS

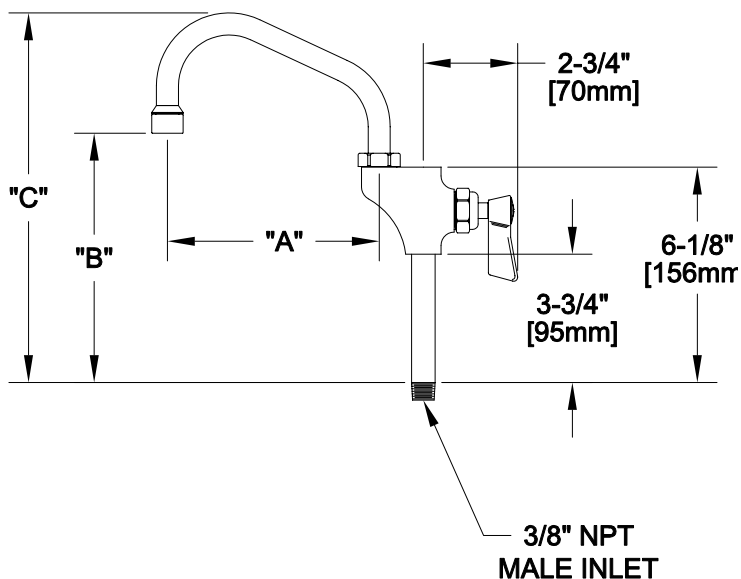

MODEL	DIM "A"	DIM "B"	DIM "C"
2901	6" [152mm]	7-1/8" [181mm]	10-3/4" [273mm]
2901-8	8" [204mm]	8" [204mm]	11-5/8" [296mm]
2901-10	10" [254mm]	7-1/2" [191mm]	11" [280mm]
2901-12	12" [305mm]	8-3/4" [222mm]	12-3/8" [314mm]
2901-14	14" [356mm]	9-3/8" [239mm]	13" [330mm]
2901-16	16" [406mm]	10" [255mm]	13-5/8" [347mm]



ANSI/A112.18.1M

FISHER

FISHER MANUFACTURING COMPANY

TOLL FREE: 800-421-6162 - FAX: 800-832-8238
 information@fisher-mfg.com - www.fisher-mfg.com