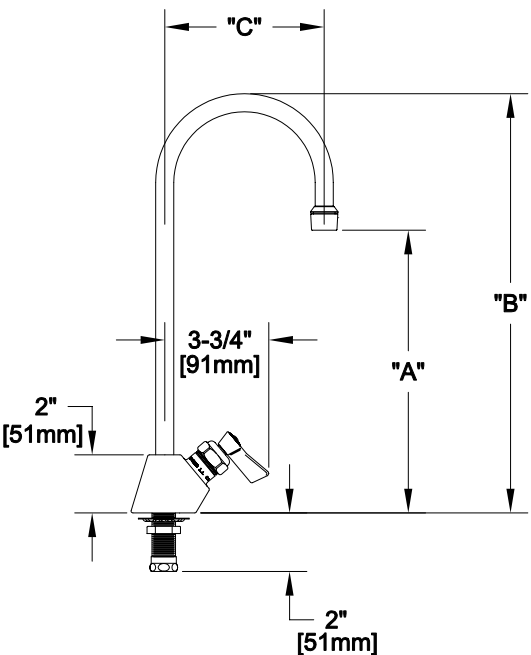




APPLICATION:		PRODUCT NAME: SINGLE DECK FAUCET WITH RIGID GOOSENECK SPOUT													
JOB NAME:		☐ SPECIAL CONFIGURATION ☐ CHECK BASE MODEL AND OPTIONS													
QUANTITY:	ITEM NO.	MODEL:													
		☐ 3016 WITH 12" RIGID GOOSENECK SPOUT ☐ 3026 WITH 6" RIGID GOOSENECK SPOUT													
		OPTIONS OR MODIFICATIONS: ☐ SUPPLY LINES (24" OR 36") CIRCLE LENGTH ☐ VANDAL RESISTANT KIT ☐ HANDLES (CROSS OR WRIST) CIRCLE STYLE ☐ OTHER _____													
		FEATURES CONTROL VALVE * SINGLE DECK MOUNT * SWIVELLING SEAT DISK * STEM - LEFT HAND * STAINLESS STEEL SEAT * STAINLESS STEEL SEAT SCREW * STAINLESS STEEL HANDLE SCREW * HOT AND COLD INDEX BUTTONS													
		SYSTEM LIMITS * TEMP: 40°F MIN. TO 140°F MAX. * PRESSURE: 200 PSI MAX. STATIC * 2.2 GPM AT 60 PSI SHIPPING WEIGHT * 3.25 LBS													
<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>MODEL</th> <th>DIM "A"</th> <th>DIM "B"</th> <th>DIM "C"</th> </tr> </thead> <tbody> <tr> <td>3016</td> <td>10-1/8" [257mm]</td> <td>14" [356mm]</td> <td>5-1/2" [140mm]</td> </tr> <tr> <td>3026</td> <td>6-1/8" [156mm]</td> <td>9-5/8" [245mm]</td> <td>3-1/2" [89mm]</td> </tr> </tbody> </table>		MODEL	DIM "A"	DIM "B"	DIM "C"	3016	10-1/8" [257mm]	14" [356mm]	5-1/2" [140mm]	3026	6-1/8" [156mm]	9-5/8" [245mm]	3-1/2" [89mm]		
MODEL	DIM "A"	DIM "B"	DIM "C"												
3016	10-1/8" [257mm]	14" [356mm]	5-1/2" [140mm]												
3026	6-1/8" [156mm]	9-5/8" [245mm]	3-1/2" [89mm]												
ROUGH-IN:															
															
 ANSI/A112.18.1M															