
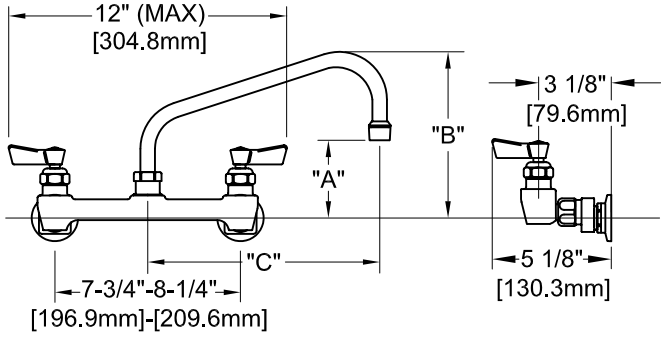


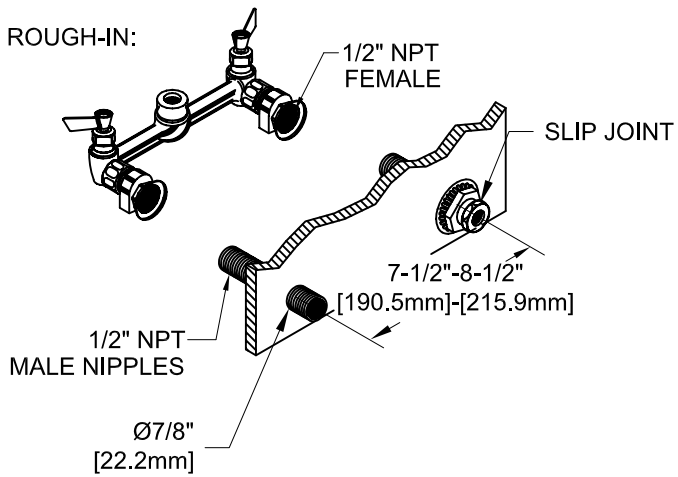

APPLICATION:		PRODUCT NAME: <div style="text-align: center;">8" ADJUSTABLE WALL MOUNT FAUCET</div>																													
JOB NAME:		<input type="checkbox"/> SPECIAL CONFIGURATION <input type="checkbox"/> CHECK BASE MODEL AND OPTIONS																													
QUANTITY:	ITEM NO.	MODEL:																													
		<input type="checkbox"/> 3250 W/ 6" SWING SPOUT <input type="checkbox"/> 3251 W/ 8" SWING SPOUT <input type="checkbox"/> 3252 W/ 10" SWING SPOUT <input type="checkbox"/> 3253 W/ 12" SWING SPOUT <input type="checkbox"/> 3254 W/ 14" SWING SPOUT <input type="checkbox"/> 9102 W/ 16" SWING SPOUT																													
		OPTIONS OR MODIFICATIONS: <input type="checkbox"/> SUPPLY LINES (24" OR 36") CIRCLE LENGTH <input type="checkbox"/> DJ SUB-ASSY (7-1/4" OR 13") CIRCLE LENGTH <input type="checkbox"/> NIPPLES <input type="checkbox"/> ELBOWS <input type="checkbox"/> VANDAL RESISTANT KIT <input type="checkbox"/> HANDLES (CROSS OR WRIST) CIRCLE STYLE <input type="checkbox"/> OTHER _____																													
<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>MODEL</th> <th>DIM "A"</th> <th>DIM "B"</th> <th>DIM "C"</th> </tr> </thead> <tbody> <tr> <td>3250</td> <td>2-1/4" [57.2mm]</td> <td>5-7/8" [149.2mm]</td> <td>6" [152.4mm]</td> </tr> <tr> <td>3251</td> <td>2-1/2" [63.5mm]</td> <td>6-3/8" [161.9mm]</td> <td>8" [203.2mm]</td> </tr> <tr> <td>3252</td> <td>3-1/8" [79.4mm]</td> <td>6-7/8" [174.6mm]</td> <td>10" [254.0mm]</td> </tr> <tr> <td>3253</td> <td>3-3/4" [95.3mm]</td> <td>7-3/8" [187.3mm]</td> <td>12" [304.8mm]</td> </tr> <tr> <td>3254</td> <td>4-3/8" [111.1mm]</td> <td>8-1/4" [209.6mm]</td> <td>14" [355.6mm]</td> </tr> <tr> <td>9102</td> <td>5" [127.0mm]</td> <td>8-7/8" [225.4mm]</td> <td>16" [406.4mm]</td> </tr> </tbody> </table>		MODEL	DIM "A"	DIM "B"	DIM "C"	3250	2-1/4" [57.2mm]	5-7/8" [149.2mm]	6" [152.4mm]	3251	2-1/2" [63.5mm]	6-3/8" [161.9mm]	8" [203.2mm]	3252	3-1/8" [79.4mm]	6-7/8" [174.6mm]	10" [254.0mm]	3253	3-3/4" [95.3mm]	7-3/8" [187.3mm]	12" [304.8mm]	3254	4-3/8" [111.1mm]	8-1/4" [209.6mm]	14" [355.6mm]	9102	5" [127.0mm]	8-7/8" [225.4mm]	16" [406.4mm]	FEATURES: <ul style="list-style-type: none"> * 8" ADJUSTABLE WALL MOUNT * ECCENTRICS ADJUST FROM 7-3/4" TO 8-1/4" * SWIVELING SEAT DISKS * HOT SIDE STEM - RIGHT HAND * COLD SIDE STEM - LEFT HAND * STAINLESS STEEL SEATS * STAINLESS STEEL SEAT SCREWS * STAINLESS STEEL HANDLE SCREWS 	
MODEL	DIM "A"	DIM "B"	DIM "C"																												
3250	2-1/4" [57.2mm]	5-7/8" [149.2mm]	6" [152.4mm]																												
3251	2-1/2" [63.5mm]	6-3/8" [161.9mm]	8" [203.2mm]																												
3252	3-1/8" [79.4mm]	6-7/8" [174.6mm]	10" [254.0mm]																												
3253	3-3/4" [95.3mm]	7-3/8" [187.3mm]	12" [304.8mm]																												
3254	4-3/8" [111.1mm]	8-1/4" [209.6mm]	14" [355.6mm]																												
9102	5" [127.0mm]	8-7/8" [225.4mm]	16" [406.4mm]																												
ROUGH-IN: 		SYSTEM LIMITS <ul style="list-style-type: none"> * TEMP: 40°F MIN. TO 140°F MAX. * PRESSURE 200 PSI MAX. STATIC * 2.20 GPM AT 80 PSI 																													
		SHIPPING WEIGHT <ul style="list-style-type: none"> * 5.0 LBS 																													
 FISHER MANUFACTURING COMPANY TOLL FREE: 800-421-6162 - FAX: 800-832-8238 information@fisher-mfg.com - www.fisher-mfg.com		 ANSI/A112.18.1M																													