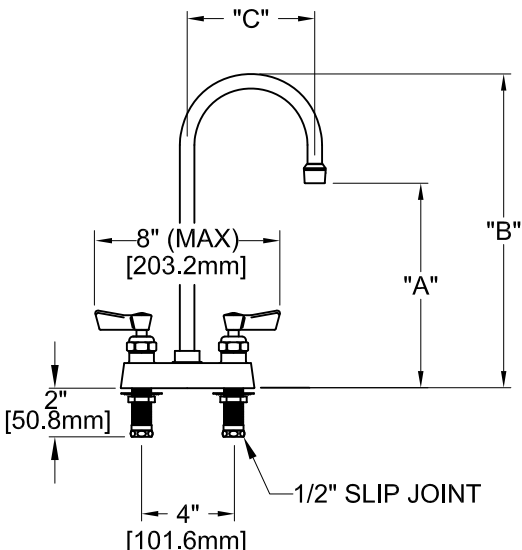




APPLICATION:		PRODUCT NAME: 4" C/C DECK FAUCET W/ RIGID GOOSENECK SPOUTS																					
JOB NAME:		☐ SPECIAL CONFIGURATION ☐ CHECK BASE MODEL AND OPTIONS																					
QUANTITY:	ITEM NO.	MODEL:																					
 FOOTPRINT:  <table border="1" style="margin: 10px auto; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>MODEL</th> <th>DIM "A"</th> <th>DIM "B"</th> <th>DIM "C"</th> </tr> </thead> <tbody> <tr> <td>73366</td> <td>8-1/2" [215.9mm]</td> <td>12-1/2" [317.5mm]</td> <td>5-1/2" [139.7mm]</td> </tr> <tr> <td>73367</td> <td>4-3/4" [120.7mm]</td> <td>8-3/8" [212.7mm]</td> <td>3-1/2" [88.90mm]</td> </tr> <tr> <td>3516</td> <td>8-1/2" [215.9mm]</td> <td>12-1/2" [317.5mm]</td> <td>5-1/2" [139.7mm]</td> </tr> <tr> <td>3526</td> <td>4-3/4" [120.7mm]</td> <td>8-3/8" [212.7mm]</td> <td>3-1/2" [88.90mm]</td> </tr> </tbody> </table> ROUGH-IN: 		MODEL	DIM "A"	DIM "B"	DIM "C"	73366	8-1/2" [215.9mm]	12-1/2" [317.5mm]	5-1/2" [139.7mm]	73367	4-3/4" [120.7mm]	8-3/8" [212.7mm]	3-1/2" [88.90mm]	3516	8-1/2" [215.9mm]	12-1/2" [317.5mm]	5-1/2" [139.7mm]	3526	4-3/4" [120.7mm]	8-3/8" [212.7mm]	3-1/2" [88.90mm]	☐ 73366 W/ 12" RIGN SPOUT, 0.35 GPM ☐ 73367 W/ 6" RIGN SPOUT, 0.35 GPM ☐ 3516 W/ 12" RIGN SPOUT, 2.2 GPM ☐ 3526 W/ 6" RIGN SPOUT, 2.2 GPM	
		MODEL	DIM "A"	DIM "B"	DIM "C"																		
		73366	8-1/2" [215.9mm]	12-1/2" [317.5mm]	5-1/2" [139.7mm]																		
		73367	4-3/4" [120.7mm]	8-3/8" [212.7mm]	3-1/2" [88.90mm]																		
3516	8-1/2" [215.9mm]	12-1/2" [317.5mm]	5-1/2" [139.7mm]																				
3526	4-3/4" [120.7mm]	8-3/8" [212.7mm]	3-1/2" [88.90mm]																				
OPTIONS OR MODIFICATIONS:		FEATURES:																					
☐ SUPPLY LINES (24" OR 36") CIRCLE LENGTH ☐ VANDAL RESISTANT KIT ☐ HANDLES (CROSS OR WRIST) CIRCLE STYLE ☐ OTHER _____																							
SYSTEM LIMITS																							
SHIPPING WEIGHT		* 4" C/C DECK MOUNT * SWIVELING SEAT DISKS * HOT SIDE STEM - RIGHT HAND * COLD SIDE STEM - LEFT HAND * STAINLESS STEEL SEATS * STAINLESS STEEL SEAT SCREWS * STAINLESS STEEL HANDLE SCREWS * 1/2" SLIP JOINT KIT																					
* TEMP: 40°F MIN. TO 160°F MAX. * PRESSURE 200 PSI MAX. STATIC * 0.35 GPM TO 2.20 GPM AT 60 PSI		* 4.5 LBS																					
 ANSI/A112.18.1M		 FISHER MANUFACTURING COMPANY TOLL FREE: 800-421-6162 - FAX: 800-832-8238 information@fisher-mfg.com - www.fisher-mfg.com																					