APPLICATION:

PRODUCT NAME:

SINGLE DECK BASE

JOB NAME:

QUANTITY:

ITEM NO.

☐ _____ SPECIAL CONFIGURATION
CHECK BASE MODEL AND OPTIONS

MODEL:

☐ 3816 W/ 12" RIGID GOOSENECK SPOUT

☐ 1937 W/ 6" RIGID GOOSENECK SPOUT

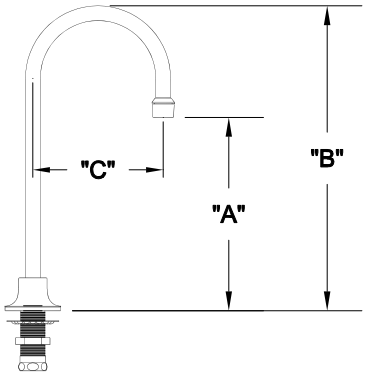

OPTIONS OR MODIFICATIONS:

☐ SUPPLY LINES (24" OR 36") CIRCLE LENGTH

☐ NIPPLES

☐ ELBOWS

☐ HANDLES (CROSS OR WRIST) CIRCLE STYLE

☐ VANDAL RESISTANT KIT

☐ OTHER _____

FEATURES

* SINGLE DECK

SYSTEM LIMITS

* TEMP: 40°F MIN. TO 140°F MAX.
* PRESSURE 200 PSI MAX. STATIC
* 2.20 GPM @ 60 PSI

SHIPPING WEIGHT

* 3.0 LBS

MODEL	DIM "A"	DIM "B"	DIM "C"
3816	8-3/16" [208.0mm]	12-5/16" [312.7mm]	5-1/2" [139.7mm]
1937	4-7/16" [112.7mm]	8-1/16" [204.8mm]	3-1/2" [88.90mm]

ROUGH-IN:



ANSI/A112.18.1M

FISHER MANUFACTURING COMPANY
TOLL FREE: 800-421-6162 - FAX: 800-832-8238
information@fisher-mfg.com - www.fisher-mfg.com