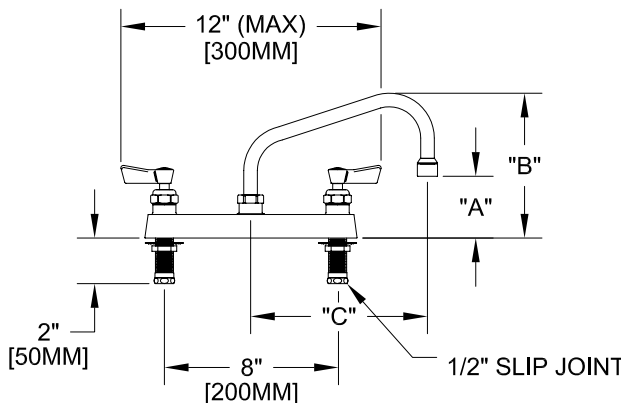
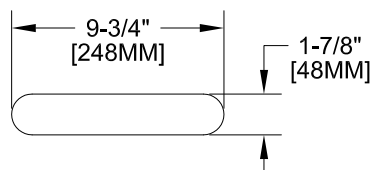
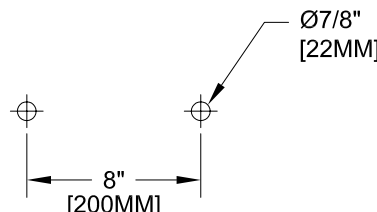


APPLICATION:		PRODUCT NAME: SS 8" C/C DECK FAUCET																													
JOB NAME:		☐ SPECIAL CONFIGURATION ☐ CHECK BASE MODEL AND OPTIONS																													
QUANTITY:	ITEM NO.	MODEL: ☐ 57630 WITH 6" SWING SPOUT ☐ 57649 WITH 8" SWING SPOUT ☐ 57657 WITH 10" SWING SPOUT ☐ 57665 WITH 12" SWING SPOUT ☐ 57673 WITH 14" SWING SPOUT ☐ 57681 WITH 16" SWING SPOUT																													
 2" [50MM] 12" (MAX) [300MM] "B" "A" "C" 8" [200MM] 1/2" SLIP JOINT FOOTPRINT:  9-3/4" [248MM] 1-7/8" [48MM] <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>MODEL</th> <th>DIM "A"</th> <th>DIM "B"</th> <th>DIM "C"</th> </tr> </thead> <tbody> <tr> <td>57630</td> <td>2-3/8" [60MM]</td> <td>6" [150MM]</td> <td>6" [150MM]</td> </tr> <tr> <td>57649</td> <td>2-5/8" [66MM]</td> <td>6-1/2" [165MM]</td> <td>8" [200MM]</td> </tr> <tr> <td>57657</td> <td>3-1/4" [83MM]</td> <td>7" [177MM]</td> <td>10" [250MM]</td> </tr> <tr> <td>57665</td> <td>3-3/4" [98MM]</td> <td>7-1/2" [188MM]</td> <td>12" [300MM]</td> </tr> <tr> <td>57673</td> <td>4-5/8" [115MM]</td> <td>8-3/8" [212MM]</td> <td>14" [350MM]</td> </tr> <tr> <td>57681</td> <td>5-1/8" [131MM]</td> <td>9" [228MM]</td> <td>16" [400MM]</td> </tr> </tbody> </table> ROUGH-IN:  Ø7/8" [22MM] 8" [200MM]		MODEL	DIM "A"	DIM "B"	DIM "C"	57630	2-3/8" [60MM]	6" [150MM]	6" [150MM]	57649	2-5/8" [66MM]	6-1/2" [165MM]	8" [200MM]	57657	3-1/4" [83MM]	7" [177MM]	10" [250MM]	57665	3-3/4" [98MM]	7-1/2" [188MM]	12" [300MM]	57673	4-5/8" [115MM]	8-3/8" [212MM]	14" [350MM]	57681	5-1/8" [131MM]	9" [228MM]	16" [400MM]	OPTIONS OR MODIFICATIONS: ☐ SUPPLY LINES (24" OR 36") CIRCLE LENGTH ☐ DJ SUB-ASSY (7-1/4" OR 13") CIRCLE LENGTH ☐ HANDLES (CROSS OR WRIST) CIRCLE STYLE ☐ VANDAL RESISTANT KIT ☐ OTHER _____	
MODEL	DIM "A"	DIM "B"	DIM "C"																												
57630	2-3/8" [60MM]	6" [150MM]	6" [150MM]																												
57649	2-5/8" [66MM]	6-1/2" [165MM]	8" [200MM]																												
57657	3-1/4" [83MM]	7" [177MM]	10" [250MM]																												
57665	3-3/4" [98MM]	7-1/2" [188MM]	12" [300MM]																												
57673	4-5/8" [115MM]	8-3/8" [212MM]	14" [350MM]																												
57681	5-1/8" [131MM]	9" [228MM]	16" [400MM]																												
ANS/A112.18.1M		FEATURES CONTROL VALVE * 8" DECK MOUNT * STAINLESS STEEL CONSTRUCTION * SWIVELLING SEAT DISKS * HOT SIDE STEM - RIGHT HAND * COLD SIDE STEM - LEFT HAND * LEVER HANDLES OR WRIST HANDLES * SWING SPOUT																													
		SYSTEM LIMITS * TEMP: 40°F MIN. TO 140°F MAX. * PRESSURE: 200 PSI MAX. STATIC * 2.20 GPM AT 80 PSI																													
		SHIPPING WEIGHT * 5.5 LBS * NSF 61-9 APPROVED & LISTED www.truesdail.com																													
 FISHER MANUFACTURING COMPANY TOLL FREE: 800-421-6162 - FAX: 800-832-8238 information@fisher-mfg.com - www.fisher-mfg.com																															