

REMOTE POWER PACK - AIR COOLED



PREMIUM - 1 PUMP - 3,600 BTUs

- Engineered by beer-industry experts for performance and value.
- Digital thermostat for accurate glycol bath temperature.
- Expanded urethane foam insulates cabinet to maintain glycol temperature and minimize condensation.
- Exterior sight glass to verify glycol bath level.
- Anti-vibration pads reduce motor noise.
- Remote condenser for accessibility.
- Fan control switch and crank case heater included.
- Pump down refrigeration system.




Glycol Bath, Pump & Motor
(cover included)



Remote Condenser Unit
(cover included)

MMPP4302-R




5-15P



www.micromatic.com • 1 (866) 327-4159

1/2 HP COMPRESSOR

Job Number: _____ Location: _____

Part No.	Description	Shipping Weight
 MMPP4302-R	Remote condenser, air cooled power pack, 1 pump and motor	80 kg 175 lbs

Operating Performance

Compressor	1/2 HP	Refrigerant	R-134a
BTU per hour	3,600	Charge	TBD
Plug Type (NEMA #)	5-15P	Refrigerant Running Pressure	18 (low) 140 (high)
Cord Length	8'	Bath Capacity	43.5 litre (11.5 gallons)
Voltage	115	Pump Type	Rotary Vane
Body Amps / Unit Amps	5.6 / 9.8	Push In Connector	12.7mm (1/2") O.D.


Dimensions

REMOTE CONDENSING UNIT


Remote Power Packs must be installed by a qualified refrigeration technician, copper line set, drier, sight glass and refrigerant must be provided by installer. **The condensing unit needs to be hard wired and the bath has a cord and plug.**

Maximum distance from bath to compressor is 50 ft.

CONDENSING UNIT DIMENSIONS WITH COVER		
L	W	H
23.75	17.25	18.5

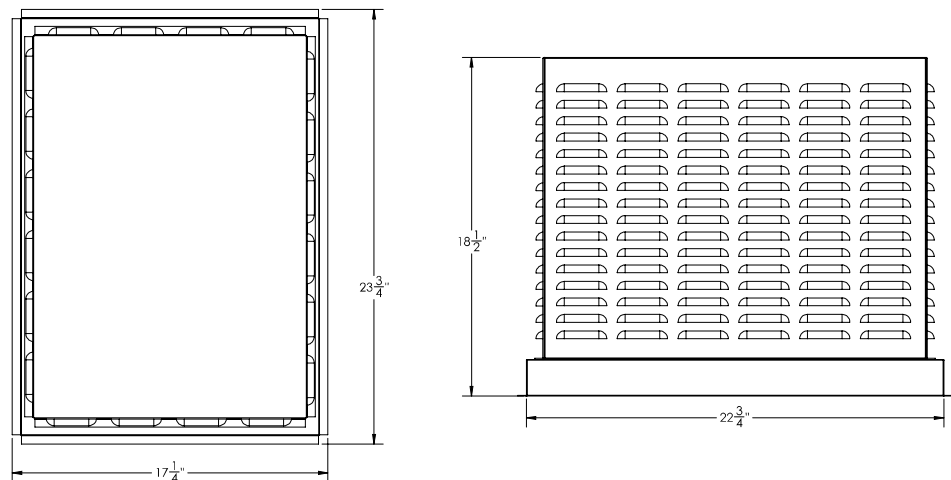

GLYCOL BATH, PUMP & MOTOR

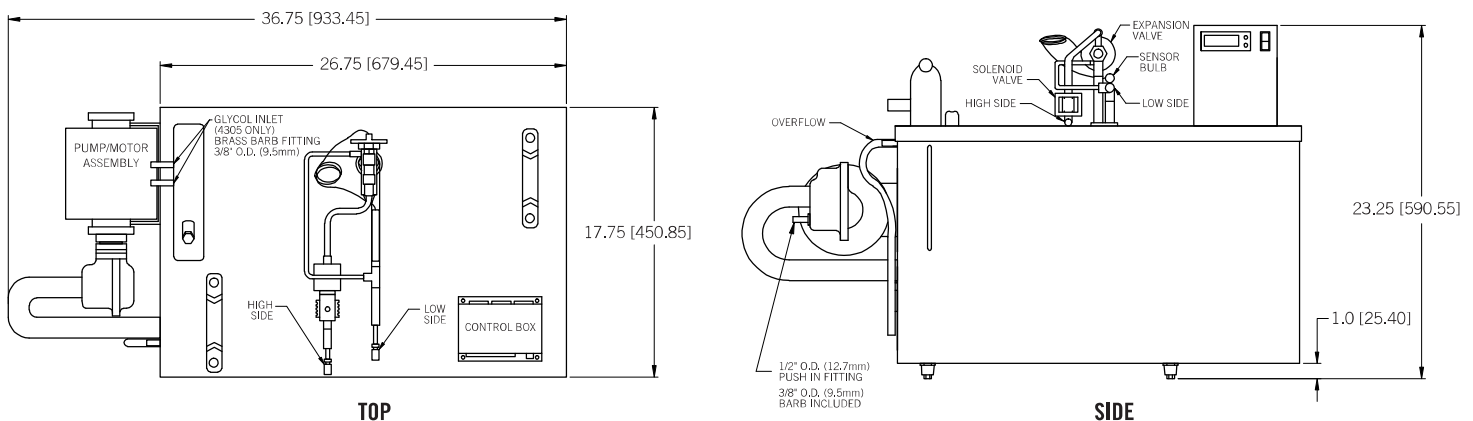

Toll-Free: 1-866-327-4159
www.micromatic.com

West

19791 Bahama St.
Northridge, CA 91324
Tel. (818) 701-9765
Fax. (818) 701-9844

Central

10726 North Second St.
Machesney Park, IL 61115
Tel. (815) 968-7557
Fax. (815) 968-0363

Southeast

2386 Simon Ct.
Brooksville, FL 34604
Tel. (352) 799-6331
Fax. (352) 796-2429

Northeast

4601 Saucon Creek Rd.
Center Valley, PA 18034
Tel. (610) 625-4464
Fax. (610) 625-4466