

POWER PACK - AIR COOLED




PREMIUM - 2 PUMP - 5,100 BTUs

- Engineered by beer-industry experts for performance and value.
- Digital thermostat for accurate glycol bath temperature.
- Expanded urethane foam insulates cabinet to maintain glycol temperature and minimize condensation.
- Exterior sight glass to verify glycol bath level.
- Anti-vibration pads reduce motor noise.
- Rugged stainless steel cabinet.
- Equipped with Smart Draft™, a temperature monitoring technology.



MMPP4303-PKG

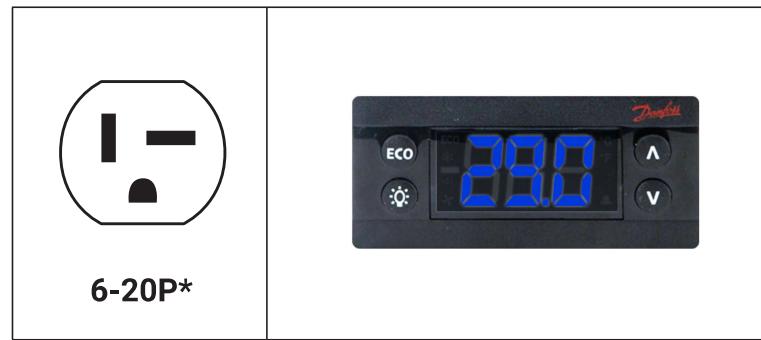

*Units manufactured prior to 2/1/2022 were produced with a 6-15P plug.



www.micromatic.com • 1 (866) 327-4159

3/4 HP COMPRESSOR

Job Number: _____ Location: _____


PART NO.	DESCRIPTION	SHIPPING WEIGHT
<input checked="" type="checkbox"/> MMPP4303-PKG	Air cooled power pack, 2 pump and motor, equipped with Smart Draft™	80 kg
		175 lbs

OPERATING PERFORMANCE

Compressor	3/4 HP	Refrigerant	R-134a
BTU per hour	5,100	Charge	0.79 kg (28 oz)
Plug Type (NEMA #)	6-20P*	Refrigerant Running Pressure	18 (low) 140 (high)
Cord Length	8'	Bath Capacity	43.5 litre (11.5 gallons)
Voltage	208/230	Pump Type	Rotary Vane
Running	9.5A	Push In Connector	12.7mm (1/2") O.D.

*Units manufactured prior to 2/1/2022 were produced with a 6-15P plug.

Power pack equipped with SMART DRAFT™, a temperature monitoring technology.

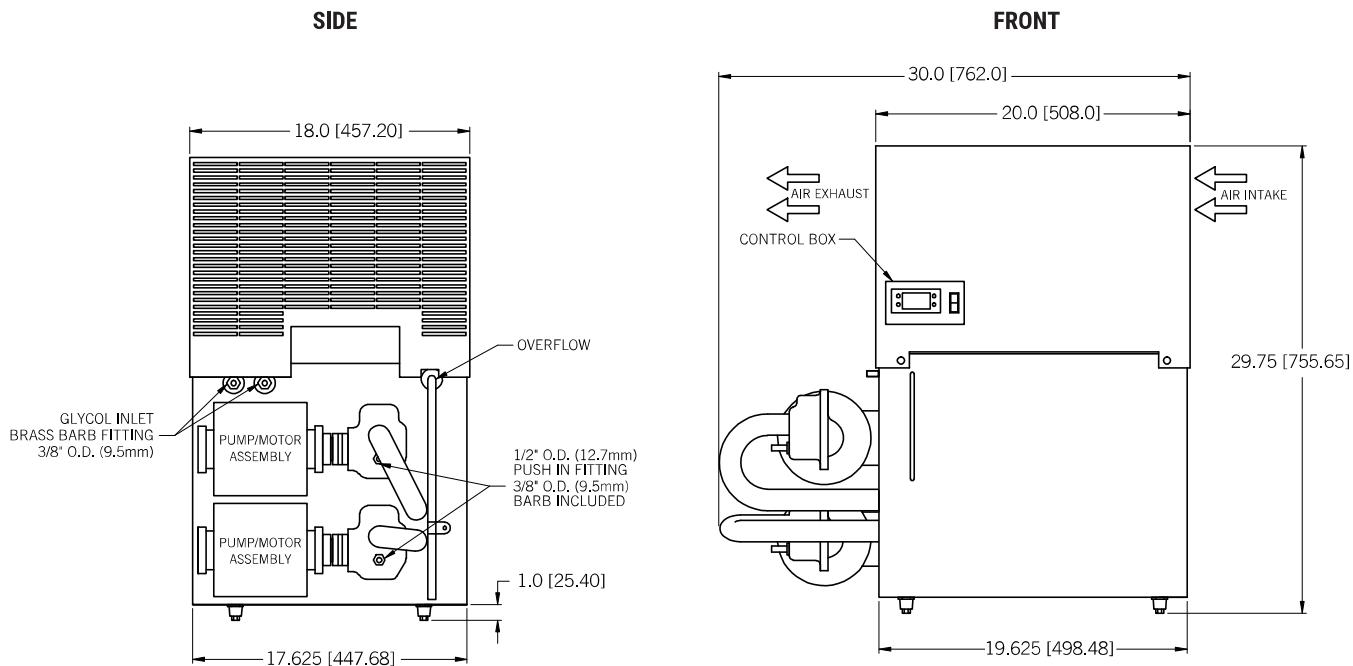DIMENSIONS

Toll-Free: 1-866-327-4159
www.micromatic.com

West

19791 Bahama St.
 Northridge, CA 91324
 Tel. (818) 701-9765
 Fax. (818) 701-9844

Central

10726 North Second St.
 Machesney Park, IL 61115
 Tel. (815) 968-7557

Southeast

15111 Dispense Ln.
 Brooksville, FL 34604
 Tel. (352) 799-6331

Northeast

4601 Saucon Creek Rd.
 Center Valley, PA 18034
 Tel. (610) 625-4464
 Fax. (610) 625-4466