
Dual Lamp Mounted Warmer

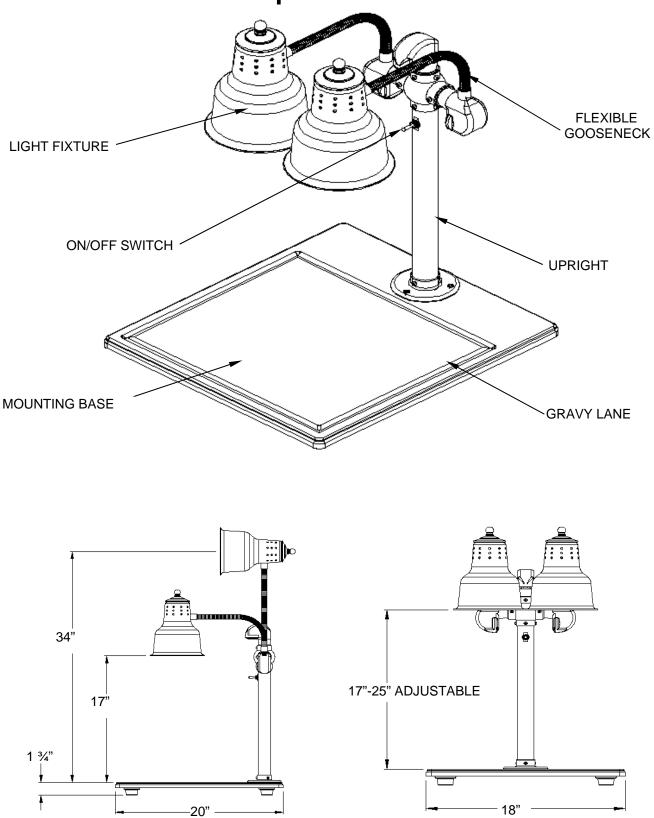

Hanson Brass Products 7530 San Fernando Road, Sun Valley, California, 91352 Toll Free (888) 841-3773, Fax (818) 767-7891 Website: www.hansonbrass.com

Dual Lamp Mounted Warmer

Description: Dual heat lamp fixtures mounted on an 18" x 20" x $\frac{3}{4}$ thick solid surface base. Base to be routed with gravy lane. Brass surfaces have a clear baked enamel finish. All internal components including lamp sockets and wiring are high temperature rated (200°C). Lamp body and fittings constructed of solid brass. Switch is rated for 15 amps @ 120 volts.

amps @ 120 volts.		
Standard Models		
Model Number	Description	
DLM/BB		d warmer on "black granite pattern" solid surface base
	in Brass finish	
DLM/BB/CHROME		d warmer on "black granite pattern" solid surface base
	in Chrome finish	
DLM/BB/COPPER	Dual lamp mounted warmer on "black granite pattern" solid surface base in Copper finish	
DLM/WB	Dual lamp mounted warmer on white solid surface base in brass finish	
DLM/WB/CHROME	Dual lamp mounte	d warmer on white solid surface base in Chrome finish
DLM/WB/COPPER	Dual lamp mounte	d warmer on white solid surface base in Copper finish
Custom Finishes, base material and sizes also available		
Specifications		
Mechanical		
Parameter		Value
Base material		Solid surface standard, pewter platter or granite
		upon request
Base size		18" x 20" x 1 3/8 " thick(includes non slip feet)
Light head material		Brass plated spun aluminum
Light head		Approximately Ø6.50" x 9.0" long
Light head height from base		Adjustable 17"-25"
Upright and all fittings		Solid brass
Shipping weight		Approximately 32 pounds
Internal wiring		18 gauge Silver stranded with Teflon insulation.
		Rated (200° C)
Lamp socket		Glazed porcelain/nickel. Rated (200° C)
Switch		On/Off rated 15 amps @ 115 VAC
Power cord		115 VAC-18 gauge 3 conductor cable 84" long with
		Nema 5-15P plug (standard)
		230 VAC-18 gauge 3 conductor harmonized cable
Electrical		84" long with Schuko plug (standard)
Operating Voltage		115-230, VAC 50-60 Hz, single phase
Power		500 watts maximum
Operating amperage		4.35 amps (115 VAC) 2.17 amps (230 VAC)
Lamp type		Infrared 250 watts maximum, shatterproof design
Safety Listings		minaroa 200 watto maximum, snatterproof design
Organizations Organizations		
Organizations		a SNITATIO.
		. ペリン フノ ペリン.
		LISTED CM