



# F-1002M\_J(-C)

Modular Ice Machine  
Slim-Line Series

W x D x H  
22" x 27<sup>3/8</sup>" x 26"

**F-1002MAJ** ★  
Air-Cooled Flaker  
Shown on optional bin B-700

**F-1002MWJ**  
Water-Cooled Flaker

**F-1002MRJ** ★  
Remote Air-Cooled Flaker

**F-1002MAJ-C** ★  
Air-Cooled Cubelet

**F-1002MWJ-C**  
Water-Cooled Cubelet

**F-1002MRJ-C** ★  
Remote Air-Cooled Cubelet




Condenser	Model	ICE PRODUCTION		WATER USAGE		ELECTRICAL				Heat Rejection BTU/hr.	Shipping Weight	ENERGY STAR®
		Air / Water Temp Lbs. per 24 hours 70°/50°F	90°/70°F	Type of Ice (Hardness Rating)	Potable Gal. per 100 lbs. 90°/70°F	Condenser Gal. per 100 lbs. 90°/70°F	kWh Used per 100 lbs. 90°/70°F	Max. Fuse Size or HACR Circuit Breaker	Amperage			
Air-Cooled	F-1002MAJ	980	758	Flaked (80.1)	12.0	N/A	4.36	20A	15.2A	115V/60/1	8,500	210 lbs. ★
Water-Cooled	F-1002MWJ	955	833	Flaked (76.8)	12.0	110	3.57	20A	13.7A	115V/60/1	8,200	205 lbs.
Remote Air-Cooled	F-1002MRJ	907	722	Flaked (79.5)	12.0	N/A	4.51	20A	15.2A	115V/60/1	8,600	210 lbs. ★
Air-Cooled	F-1002MAJ-C	890	726	Cubelet (87.1)	12.0	N/A	4.57	20A	15.2A	115V/60/1	8,700	210 lbs. ★
Water-Cooled	F-1002MWJ-C	878	770	Cubelet (84.6)	12.0	111.0	3.95	20A	13.7A	115V/60/1	8,200	205 lbs.
Remote Air-Cooled	F-1002MRJ-C	821	680	Cubelet (85.9)	12.0	N/A	4.94	20A	15.2A	115V/60/1	8,500	210 lbs. ★

Ice machines must be hard-wired at site.


## Cube Dimensions\*

### Flaked F-1002M\_J



\* approximate size in inches, image not to scale

### Cubelet F-1002M\_J-C



## Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 10 - 113 PSIG
- Voltage Range 104-127V

## Service

- Panels easily removed and all components accessible for service.
- Allow 24" (61 cm) clearance at top for removal of auger and 6" (15 cm) clearance at rear and sides for proper air circulation and ease of maintenance/service.

## Plumbing

- Icemaker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent

Water-Cooled Model (Lines Must Be Independent of Icemaker)

- Condenser Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Condenser Drain/Return Line: Minimum 1/4" Nominal ID Hard Pipe (open drain system) or Copper Water Tubing (closed loop system) or Equivalent



F-1002M\_J(-C)

03/31/17

Item # 13108A

Item #: \_\_\_\_\_

Project: \_\_\_\_\_

Qty: \_\_\_\_\_

AIA#: \_\_\_\_\_

## Features

► Durable stainless steel exterior



► Advanced CleanCycle24™ design

► Stainless steel auger with greaseless bearing

- Flaker - Up to 980 lbs. of ice production per 24 hrs.
- Cubelet - Up to 890 lbs. of ice production per 24 hrs.
- Infrared bin control for easy cleaning and reliability
- Protected by H-GUARD Plus Antimicrobial Agent
- 2 second flush cycle every hour
- Flush cycle removes sediment for cleaner ice
- Mount two units, side-by-side, in only 44" of floor space for double the amount of ice production
- R-404A Refrigerant

### Available on Bins:

B-250PF B-500PF/SF B-800PF/SF B-1150SS B-1500SS\*  
B-300PF/SF B-700PF/SF B-900PF/SF B-1300SS B-1650SS\*

Top kit may be required; See Bin Spec Sheets. \*Two unit application only.

### Warranty:

3 Year Parts & Labor on entire machine. 5 Year Parts on Compressor; air-cooled condenser coil. Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.



# F-1002M\_J(-C)

Modular Ice Machine  
Slim-Line Series




F-1002M\_J(-C)


03/31/17

Item # 13108A


## FRONT VIEW

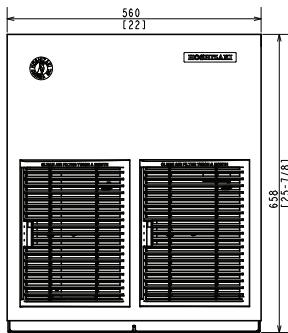

AIR-COOLED

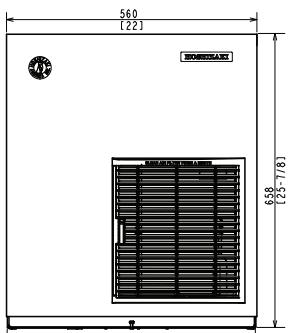


WATER-COOLED

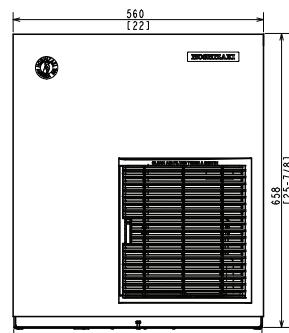


REMOTE AIR-COOLED


## SIDE VIEW

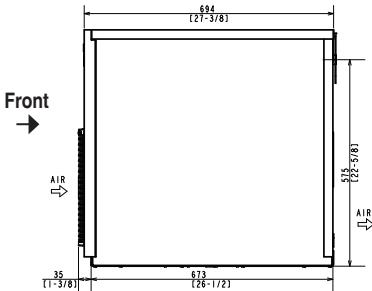

Front →

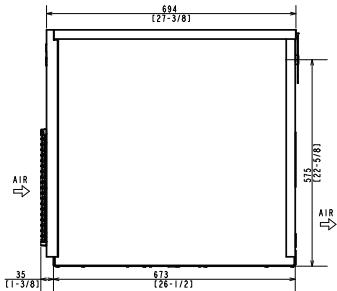

AIR

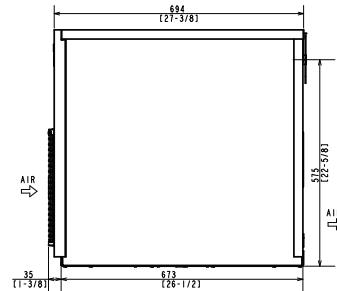


AIR

AIR-COOLED


WATER-COOLED

REMOTE AIR-COOLED


## REAR VIEW

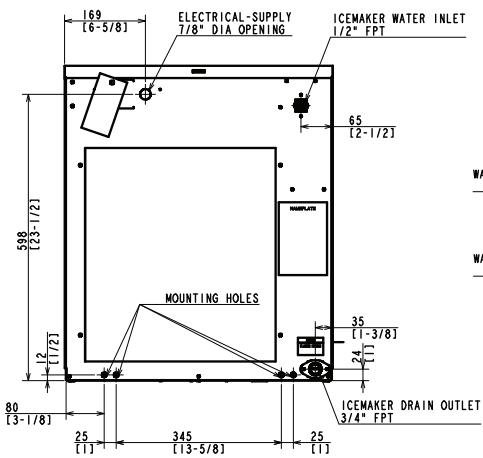

AIR-COOLED

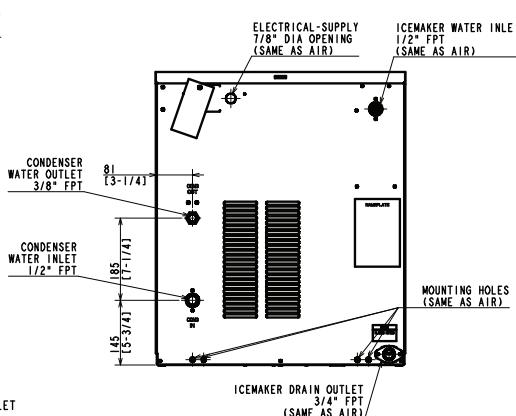


WATER-COOLED

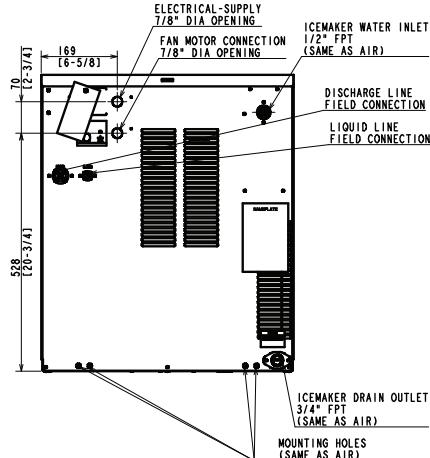


REMOTE AIR-COOLED

## BOTTOM VIEW

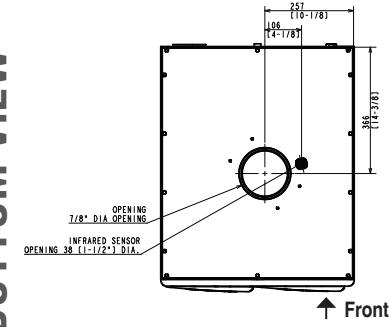

AIR-COOLED

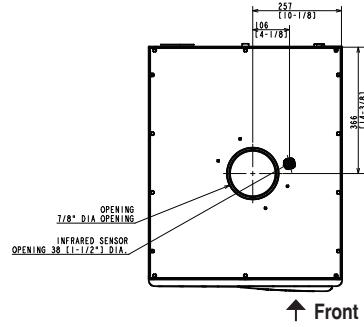

WATER-COOLED  
REMOTE AIR-COOLED



Pre-Charged Tubing Kits  
(Sold Separately)  
20' R404-2046-2  
35' R404-3546-2

Voltage supply for the URC  
Remote Condenser is supplied  
from the Ice Maker.  
No additional circuit is required.

