

uniQ^{ue}

WWW.METRO.COM



We put space to work.™

The image shows a close-up of the MetroMax iQ Storage System. It features a white vertical support pole and a blue horizontal beam. A black bracket with two blue adjustment knobs is attached to the pole. A blue label with the 'METRO MAX i' logo is also visible on the beam. The background shows a blue plastic storage bin with a grid pattern.

MetroMax iQ™ Storage System :-)

Combines the advantages of MetroMax i™ and MetroMax Q™ to create a system that's perfect for you—we call it iQ.



We put space to work.™



CONTENTS

MetroMax iQ™ Storage System :-)

iQ System Overview	2-3
How MetroMax i™ & MetroMax Q™ Integrate	4-5
Build-a-shelf with the iQ Shelving System	6-7
Casters, Pull & Push Handles	8-9
Mobile Shelving Units & Utility Carts	10-11
Starter and Add-on Units	12-13
System Accessories	14-20
Security Storage	21
High-Density Movable Aisle Shelving	22-24
Shelving Comparison	25

uniQ equation.

$i + Q = iQ$...now that's smart.

Uniquely Justifiable :-)

"Budgets are tight... so we need to make every dollar last."

MetroMax i™
Uniquely Lifelong...



Uniquely Cleanable :-)

"Removable mats are a must in any industry, so cleanable."

MetroMax Q™
Unique Value...



Uniquely Interchangeable :-)

"We're looking for a smart system that lets us interchange and upgrade components to meet new and changing tasks."

Uniquely Intelligent :-)

"Finally there is a system where key components can be shared... that's a company that is on our side."



MetroMax iQ™ Storage System :-)

Interchangeability: MetroMax i™ and MetroMax Q, shelves, posts, and most accessories are uniquely interchangeable making the iQ system adaptable to your specific application.

Longer-Life Durability and Performance: Corrosion proof MetroMax i™ has an innovative polymer design and the performance of stainless steel at a fraction of the cost. MetroMax Q™ has an advanced polymer and epoxy coated steel design that offers superior performance versus wire shelving. All shelves can be cleaned in a fraction of the time of wire.

Designed with innovative polymers for longer-life product performance, easy-to-clean surfaces to promote a cleaner environment and higher level of safety, interchangeable components for maximum flexibility, interactive on-line tools...a truly unique way to improve operational efficiencies, productivity, and ultimately ROI.



Improved Cleanability: iQ System shelves have removable polymer mats that are easily cleaned in sinks, wash or dish machines. Cleaner shelves promote safe environments.

Storage Optimization: iQ System accessories contain, compartmentalize, and organize your stored contents to maximize every square inch of storage space. Smooth polymer components protect fragile packaged items.



We put space to work.™



MetroMax i™ Uniquely Lifelong...

- Corrosion Proof, Lifetime Warranty Against Corrosion
- Polymer Construction with Stainless Steel Corners
- All Polymer Posts
- Removable, Easily Cleanable Shelf Mats
- Open Grid and Solid Shelves

Interchangeable Posts



Interchangeable Shelves



Selecting system components for your



*"The choice was easy...
Our facility needed the most
cleanable, most durable,
and totally corrosion proof
system available, and
MetroMax i™ was all that
and cost efficient."*



*"We put extremely heavy loads
on our MetroMax i Top-Track
system, so we opted for the steel
posts for added rigidity."*

MetroMax Q™

Unique Value...

- Quick-to-adjust Shelves Provide Maximum Space Utilization
- Corrosion Resistant, 15 Year Warranty Against Corrosion
- Epoxy Coated Wire Shelf Frames and Posts
- Removable, Easily Cleanable Shelf Mats
- Open Grid Shelves

Interchangeable shelves, posts, and accessories provide increased storage efficiencies.



All shelf mats, posts, and touch points have built in Microban® antimicrobial product protection.

application... it's a no brainer.



"While outfitting a damp area with shelving, we were able to upgrade our system; all 4 posts are now polymer and the bottom shelf is a Heavy Duty polymer as well... the units fit perfectly into our budget and provides long-term value."



"We've typically purchased standard wire shelving, but these days value is a must. Upgrading to MetroMax Q is the perfect balance between price and value. it's easy to clean and resists rust and corrosion, for a longer shelf life."

MetroMax i™ Uniquely Lifelong...

MetroMax i™ Polymer Shelving 9.20

Standard Shelves

- Part number includes shelf with removable mats and one bag of wedges.

Nominal Width	Nominal Length	Approx. Pkd. Wt. (lb)	Approx. Pkd. Wt. (kg)	Shelf with Grid Mat Cat. No.	List Price Each	Approx. Pkd. Wt. (lb)	Approx. Pkd. Wt. (kg)	Shelf with Solid Mat Cat. No.	List Price Each
18	457	24	610	8.7	4.0	MX1824G			119.00
18	457	30	760	10.5	4.7	MX1830G		MX1824F	133.50
18	457	36	914	12.2	5.5	MX1836G		MX1830F	138.00
18	457	42	1060	13.9	5.3	MX1842G		MX1836F	140.00
18	457	48	1220	15.7	7.1	MX1848G		MX1842F	166.00
18	457	54	1372	17.5	7.9	MX1854G		MX1848F	168.00
18	457	60	1524	19.2	8.7	MX1860G		MX1854F	199.00
18	457	72	1829	22.5	10.2	MX1872G		MX1860F	201.50
24	610	24	610	12.2	5.5	MX2424G		MX1872F	242.00
24	610	30	760	13.9	6.3	MX2430G		MX2424F	168.00
24	610	36	914	15.6	7.1	MX2436G		MX2430F	171.50
24	610	42	1060	17.5	7.9	MX2442G		MX2436F	174.50
24	610	48	1220	19.3	8.7	MX2448G		MX2442F	204.50
24	610	54	1372	21.0	9.5	MX2454G		MX2448F	204.50
24	610	60	1524	22.8	10.5	MX2460G		MX2454F	245.00
24	610	72	1829	26.0	11.8	MX2472G		MX2460F	245.00
								MX2472F	294.00

Actual Dimensions: Width: Add 1/4" (6mm) to nominal size. Length: Subtract 1/4" (6mm) from nominal size.

Heavy-Duty Dunnage Shelves

- Weight capacity per shelf evenly distributed: 1,200 lbs. (544kg) on shelves up to and including 48" (1220mm) long; 900 lbs. (408kg) for shelves 60" (1524mm) long.

Nominal Width	Nominal Length	Approx. Pkd. Wt. (lb)	Approx. Pkd. Wt. (kg)	Shelf with Grid Mat Cat. No.	List Price Each	Approx. Pkd. Wt. (lb)	Approx. Pkd. Wt. (kg)	Shelf with Solid Mat Cat. No.	List Price Each
18	457	36	914	18	8.2	MHP1836G		MHP1836F	152.00
18	457	48	1220	22	10.0	MHP1848G		MHP1848F	181.00
18	457	60	1524	26	11.8	MHP1860G		MHP1860F	218.00
24	610	36	914	21	9.5	MHP2436G		MHP2436F	189.00
24	610	48	1220	27	12.2	MHP2448G		MHP2448F	218.00
24	610	60	1524	33	15.0	MHP2460G		MHP2460F	262.00

(Dunnage shelves are not recommended for use as part of an add-on unit with two posts.)

Polymer Posts

- Corrosion proof with built-in Microban antimicrobial product protection.
- Compatible for use with MetroMax i™ and MetroMax Q shelves.
- Stationary posts include an adjustable leveling foot to compensate for uneven floors. Leveling foot can be adjusted 1" (25mm).

Nominal Height (in) (mm)	Approx. Pkd. Wt. (lb) (kg)	Stationary Post with Leveling Foot Cat. No.	Mobile Post for Stem Caster Cat. No.	List Price Each
9	228	0.3	0.15	MX9UP 20.50
13	370	0.5	0.2	MX13P MX13UP 23.50
27	685	0.9	0.4	MX27P MX27UP 32.00
33	875	1.0	0.5	MX33P MX33UP 35.00
54	1370	1.6	0.7	MX54P MX54UP 39.00
63	1585	1.8	0.8	MX63P MX63UP 42.00
74	1890	2.2	1.0	MX74P MX74UP 47.50
86	2195	3.0	1.4	MX86P MX86UP 55.50

(Special height cut posts are available. Consult your Metro representative.)

MetroMax i™ Replacement Wedges

Bag of (4)
Cat. No. **MX9985**
List Price **9.00 each**

MetroMax i™ Wedges are not compatible with original MetroMax shelves and posts.

Post Clamp

Adds stability by joining posts of two separate units together. With it, each unit is supported by four posts and buttressed by the adjacent unit.
Cat. No. **9994X**
List Price **16.20 each**

Foot Plate

Use to add stability to the shelving unit or to bolt units to the floor.
Cat. No. **Zinc 9993Z**
List Price **11.50 each**

Cat. No. **Stainless Steel 9993S**
List Price **26.00 each**



MetroMax Q™

Unique Value...

MetroMax Q™ Shelving 9.21

Standard Shelves

- Part number includes shelf with removable mats and one bag of wedges.

Nominal Width (in) (mm)	Nominal Length (in) (mm)	Approx. Pkd. Wt. (lb) (kg)	Shelf with Grid Mat Cat. No.	List Price Each
18 457	24 610	6.2 2.8	MQ1824G	80.50
18 457	30 760	8.0 3.6	MQ1830G	84.50
18 457	36 914	9.7 4.4	MQ1836G	86.50
18 457	42 1060	11.4 5.2	MQ1842G	100.50
18 457	48 1220	13.2 6.0	MQ1848G	100.50
18 457	54 1372	15.0 6.8	MQ1854G	116.50
18 457	60 1524	16.7 7.6	MQ1860G	116.50
18 457	72 1829	20.0 9.1	MQ1872G	141.00
21 530	24 610	8.0 3.6	MQ2124G	91.50
21 530	30 760	9.7 4.4	MQ2130G	93.50
21 530	36 914	11.4 5.2	MQ2136G	96.00
21 530	42 1060	12.8 5.8	MQ2142G	110.00
21 530	48 1220	14.5 6.6	MQ2148G	110.00
21 530	54 1372	16.7 7.6	MQ2154G	131.00
21 530	60 1524	18.5 8.4	MQ2160G	131.00
21 530	72 1829	21.7 9.9	MQ2172G	160.50
24 610	24 610	9.7 4.4	MQ2424G	97.00
24 610	30 760	11.4 5.2	MQ2430G	99.50
24 610	36 914	13.1 6.0	MQ2436G	101.50
24 610	42 1060	14.1 6.4	MQ2442G	124.00
24 610	48 1220	15.8 7.1	MQ2448G	124.00
24 610	54 1372	18.5 8.4	MQ2454G	144.00
24 610	60 1524	20.3 9.2	MQ2460G	144.00
24 610	72 1829	23.5 10.7	MQ2472G	171.00

Actual Dimensions: Width: Add $\frac{3}{8}$ " (10mm) to nominal size. Length: Subtract $\frac{3}{16}$ " (5mm) from nominal size.

Solid Mat Overlays

- Overlays snap onto the open grid mats to create a solid surface.
- Available for 21" (530mm) deep MetroMax Q shelves.

Fits Shelf		Approx. Pkd. Wt.		Cat. No.	List Price Each
(in)	(mm)	(lb)	(kg)		
21x24	530x610	0.35	0.16	Q2124SM	31.50
21x30	530x760	0.45	0.20	Q2130SM	32.50
21x36	530x914	0.50	0.23	Q2136SM	34.00
21x42	530x1060	0.60	0.27	Q2142SM	38.00
21x48	530x1220	0.70	0.32	Q2148SM	38.00
21x54	530x1372	0.80	0.36	Q2154SM	45.50
21x60	530x1524	0.90	0.41	Q2160SM	45.50
21x72	530x1829	1.00	0.45	Q2172SM	54.50

Steel Posts

- Epoxy coated steel has Microban antimicrobial product protection.
- Stationary posts include an adjustable leveling foot to compensate for uneven floors. Leveling foot can be adjusted 1" (25mm).
- When mounting a shelving unit to a dolly base, stationary posts are used.

Nominal Height (in) (mm)	Approx. Pkd. Wt. (lb) (kg)	Stationary Post with Leveling Foot Cat. No.	Mobile Post for Stem Caster Cat. No.	List Price Each
13 370	1.0 0.5	MQ13PE	MQ13UPE	19.50
27 685	2.0 0.9	MQ27PE	MQ27UPE	23.50
33 875	2.5 1.1	MQ33PE	MQ33UPE	26.50
54 1370	4.0 1.8	MQ54PE	MQ54UPE	27.50
63 1585	4.5 2.0	MQ63PE	MQ63UPE	31.00
70 1778	5.0 2.3	-	MQ70UPE	39.50
74 1890	5.5 2.5	MQ74PE	MQ74UPE	33.00
86 2195	6.5 2.9	MQ86PE	MQ86UPE	37.50

(Special height cut posts are available. Consult your Metro representative.)



MetroMax Q™ shelves that are part of the iQ system have different actual measurements than original MetroMax Q shelves and cannot be mixed on the same shelving units.



MetroMax Q™ Replacement Wedges
Bag of (4)
Cat. No. MQ9985
List Price 8.90 each

MetroMax Q™ Wedges are compatible with original MetroMax Q shelves and posts.



Go mobile.

Add casters to any shelving unit to add versatility.

MetroMax iQ Stem Casters 9.25

For use with either MetroMax i polymer or MetroMax Q steel stem caster posts.

- Promotes easy cleaning. Casters allow shelving units to be moved easily for access to floors and walls.
- Efficient Transport: Create a cart to efficiently move supplies throughout a facility or campus.



5PCX



5PCBX



5MPX

Rigid stem casters are often ordered two per unit for improved tracking and handling. Rigid caster channels are provided with each two rigid stem casters at no charge.

Polymer Stem Casters 9.25

- Corrosion resistant performance: all-polymer horn, stainless steel axel and hardware, 5" (127mm) diameter polyurethane wheel, sleeve-style axle bearing, and an optional toe-operated brake mechanism.
- Models available with antimicrobial product protection built into the tread
- Load rating of 300 lbs. (135kg) and a temperature range from -20° to 120° F (-29° to 49° C) [continuous].
- Bumpers included

Wheel Tread	Type	Diameter (mm)		Width (mm)		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No.	List Price Each	Cat. No. Antimicrobial	List Price Each
Polyurethane	Swivel	5	127	1 1/4	32	2	.9	5PCX	72.00	5PCXM	80.00
Polyurethane	Brake	5	127	1 1/4	32	2	.9	5PCBX	78.50	5PCBXM	86.00
Polyurethane	Rigid*	5	127	1 1/4	32	2	.9	5PCR	78.50		

Note 1: Optional tread guards (blue) may be ordered by adding *-TG* to the desired model number (eg. 5PC-TG, 5PCB-TG, 5PCR-TG).

Note 2: Stem casters are shipped with donut bumpers at no extra charge.

***Note 3:** Rigid casters are held in place by a connecting channel. When ordering, shelf width **must** be provided.

Standard Stem Casters 9.25

- Plated caster horns and hardware
- Swivel, Swivel with Brakes, and Rigid Caster options available

Type	Wheel Tread	Load Rating (lbs.) (kg)		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No.	List Price Each
Stem/Swivel	Resilient	200	91	2 3/4	1.2	5MX	30.00
Stem/Brake	Resilient	200	91	3	1.4	5MBX	36.00
Stem/Rigid	Resilient	200	91	3 3/4	1.7	5MRX	36.00
Stem/Swivel	Polyurethane	300	135	2 1/4	1.0	5MPX	47.00
Stem/Brake	Polyurethane	300	135	2 1/2	1.1	5MPBX	53.00
Stem/Rigid	Polyurethane	300	135	2 1/4	1.0	5MPRX	53.00
Stem/Swivel	Resilient Donut	250	113	2 1/2	1.1	5MDXA	30.00
Stem/Brake	Resilient Donut	250	113	2 1/2	1.1	5MDBXA	36.00
Stem/Rigid	Resilient Donut	250	113	2 1/2	1.1	5MDRXA	36.00

MetroMax iQ bumpers included.

***Note:** Rigid casters are held in place by a connecting channel. When ordering, shelf width **must** be provided.

Stainless Steel Cart-Washable Stem Casters 9.25

- Stainless horn, axle, and stem with sealed bearings

Type	Wheel Tread	Load Rating (lbs.) (kg)		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No.	List Price Each
Stem/Swivel	Polyurethane	300	135	2 1/8	1.0	5MPXGSA	142.50
Stem/Brake	Polyurethane	300	135	2 1/8	1.0	5MPBXGSA	147.50
Stem/Rigid*	Polyurethane	300	135	2 1/8	1.0	5MPRXGSA	147.50

***Note:** Rigid casters are held in place by a connecting channel. When ordering, shelf width **must** be provided.



Interchangeable shelves,
posts, and accessories
provide increased storage
efficiencies.

Handle it.

Adding Stainless Steel handles to shelving puts you in control.

- Use handles on mobile units to improve maneuverability and ergonomics.
- Handles are compatible with MetroMax i™ and MetroMax Q™ units.
- Corrosion proof type 304 stainless steel construction offers long lasting performance.



Tri-Lobal Adaptors

Included with handles

Tri-Lobal Adaptor Replacements

Cat. No. MTLA
Bag of 4 assemblies
List Price 10.00

MTLA adaptors are designed to work with the new MetroMax iQ Storage System and are not compatible with original MetroMax

All handles can be retrofitted to original MetroMax units. Order RMAX-TRIADTR adaptors to connect the handle to the original posts.

Extended and Easy-Grip Handles are compatible with original MetroMax Q shelves.

Extended Handle 9.25

Fits Shelf Depth (in) (mm)		Extension Depth (post to edge of handle) (in) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		i and Q Cat. No.	List Price Each
18	457	4.5	113	2.5	1.1	MEH18S	77.00
21	530	4.5	113	2.6	1.2	MEH21S	79.00
24	610	4.5	113	2.8	1.3	MEH24S	80.50



Easy-Grip Handle 9.25

Fits Shelf Depth (in) (mm)		Extension Depth (post to edge of handle) (in) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		i and Q Cat. No.	List Price Each
18	457	6	151	2.5	1.1	MERGH18S	85.00
24	610	6	151	3.0	1.4	MERGH24S	89.00



Swing-up Handle 9.25

- Ideal for maneuvering heavier loads

Fits Shelf Depth (in) (mm)		Extension Depth (post to edge of handle) (in) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		i and Q Cat. No.	List Price Each
24	610	17.75	447	4.5	2.0	MSUH24S	129.50





MetroMax i[™]
with Open Grid Shelves.



MetroMax i[™]
with Solid Shelves.

MetroMax i[™] - Stem Caster Carts

- Corrosion proof shelves and posts; removable polymer mats
- Standard Units consist of four shelves, MX63UP posts 63" (1600mm), wedge connectors and choice of resilient rubber or polyurethane casters.
- Approximate cart height — 69" (1753mm). Weight capacity of cart: 900 lbs. (408kg) evenly distributed

MetroMax i[™] Open Grid

Nominal Width/Length (in)	Nominal Width/Length (mm)	Approx. Pkd. Wt. (lb)	Approx. Pkd. Wt. (kg)	2-Swivel 2-Brake Resilient Rubber Casters Cat. No.	List Price Each	2-Swivel 2-Brake Poly Casters Cat. No.	List Price Each
18x36	457x914	74	33	X336BGX3	797.00	X336EGX3	866.00
18x48	457x1220	86	38	X356BGX3	913.00	X356EGX3	982.00
18x60	457x1524	98	44	X366BGX3	1,005.00	X366EGX3	1,074.00
24x36	610x914	82	37	X536BGX3	919.00	X536EGX3	988.00
24x48	610x1220	98	44	X556BGX3	1,035.00	X556EGX3	1,104.00
24x60	610x1524	114	51	X566BGX3	1,179.00	X566EGX3	1,248.00

MetroMax i[™] Solid Shelves

Approx. Pkd. Wt. (lb)	Approx. Pkd. Wt. (kg)	2-Swivel 2-Brake Poly Casters Cat. No.	List Price Each
94	42	X336EFX3	928.00
106	48	X356EFX3	1,040.00
118	53	X366EFX3	1,174.00
102	46	X536EFX3	1,066.00
118	53	X556EFX3	1,186.00
134	60	X566EFX3	1,348.00



MetroMax Q[™]
with Open Grid Shelves.

MetroMax Q - Stem Caster Cart, Open Grid Shelves

- Quick adjust shelves with removable polymer shelf mats.
- Standard Units consist of four open grid shelves, MQ63UPE posts 63" (1600mm), wedge connectors, and choice of resilient rubber or polyurethane casters.
- Approximate cart height — 69" (1753mm). Weight capacity of cart: 900 lbs. (408kg) evenly distributed

Nominal Width/Length (in)	Nominal Width/Length (mm)	Approx. Pkd. Wt. (lb)	Approx. Pkd. Wt. (kg)	2-Swivel 2-Brake Resilient Rubber Casters Cat. No.	List Price Each	2-Swivel 2-Brake Poly Casters Cat. No.	List Price Each
18x36	457x914	68	31	Q336BG3	599.00	Q336EG3	668.00
18x48	457x1220	84	38	Q356BG3	657.00	Q356EG3	726.00
18x60	457x1524	100	45	Q366BG3	721.00	Q366EG3	790.00
21x36	530x914	74	34	Q436BG3	639.00	Q436EG3	708.00
21x48	530x1220	90	41	Q456BG3	695.00	Q456EG3	764.00
21x60	530x1524	106	48	Q466BG3	779.00	Q466EG3	848.00
24x36	610x914	80	36	Q536BG3	659.00	Q536EG3	728.00
24x48	610x1220	96	44	Q556BG3	751.00	Q556EG3	820.00
24x60	610x1524	112	51	Q566BG3	831.00	Q566EG3	900.00

Stem Caster Carts with Solid Bottom MetroMax i[™] shelves

- 5-tier models with Microban[®] antimicrobial product protection
- Standard Units consist of 5 shelves (4 open grid, 1 MetroMax i solid), 74" (1880mm) posts, wedge connectors, and polyurethane casters.
- Approximate cart height — 80" (2032mm). Weight capacity of cart: 900 lbs. (408kg) evenly distributed



MetroMax i[™]
with a Solid Bottom Shelf.

i					Q				
Nominal Width/Length (in)	Nominal Width/Length (mm)	Approx. Pkd. Wt. (lb)	Approx. Pkd. Wt. (kg)	2-Swivel 2-Brake Poly Casters Cat. No.	List Price Each	Approx. Pkd. Wt. (lb)	Approx. Pkd. Wt. (kg)	2-Swivel 2-Brake Poly Casters Cat. No.	List Price Each
18x36	457x914	82	37	5X337EGX3	1,028.00	85	39	5Q337EG3	816.00
18x48	457x1220	109	49	5X357EGX3	1,172.00	111	50	5Q357EG3	902.00
18x60	457x1524	121	55	5X367EGX3	1,297.50	123	56	5Q367EG3	999.50
24x36	610x914	102	46	5X537EGX3	1,184.50	104	47	5Q537EG3	910.50
24x48	610x1220	123	56	5X557EGX3	1,330.50	125	57	5Q557EG3	1,032.50
24x60	610x1524	141	63	5X567EGX3	1,515.00	144	65	5Q567EG3	1,153.00



Push ahead.

Give yourself the versatility you need with Metro Utility Carts.

Utility Carts

- Can be used in a variety of unique transport applications.
- Durable materials, ergonomic handles, and premium casters promote long life and ease of use.
- Microban product protection built into the shelf mats, frames, and posts.
- Easier to clean with removable shelf mats.

MetroMax i™ Utility Carts

- Corrosion proof shelves, posts, and type 304 stainless steel handle.
- Corrosion resistant 5PCX casters with 5" (127mm) polyurethane wheels, polymer horns, and stainless steel axles.
- 39-1/4" (997mm) tall. Weight capacity of cart: 900 lb. (408kg) evenly distributed.

Nominal Width/Length (in)	Nominal Width/Length (mm)	Actual Width/Length (in)	Actual Width/Length (mm)	Description	Approx. Pkd. Wt. (lb)	Approx. Pkd. Wt. (kg)	Cat. No.	List Price Each
18x30	457x760	20-5/16 x 34-1/2	516 x 876	2-shelf	35.5	15.8	MXUC1830G-25	748.00
24x36	610x914	26-5/16 x 40-1/2	668 x 1029	2-shelf	46.0	20.5	MXUC2436G-25	827.00
18x30	457x760	20-5/16 x 34-1/2	516 x 876	3-shelf	46.0	20.5	MXUC1830G-35	869.50
24x36	610x914	26-5/16 x 40-1/2	668 x 1029	3-shelf	61.5	27.5	MXUC2436G-35	982.00



MetroMax Q™ Utility Carts

- Quick adjust corrosion resistant shelves and posts.
- Corrosion proof type 304 stainless steel handle.
- Includes four 5MPX casters with 5" (127mm) polyurethane wheels.
- 39-1/4" (997mm) tall. Weight capacity of cart: 900 lb. (408kg) evenly distributed.

Nominal Width/Length (in)	Nominal Width/Length (mm)	Actual Width/Length (in)	Actual Width/Length (mm)	Description	Approx. Pkd. Wt. (lb)	Approx. Pkd. Wt. (kg)	Cat. No.	List Price Each
18x30	457x760	20-5/16 x 34-1/2	516 x 876	2-shelf	35.5	15.8	MQUC1830G-25	540.00
24x36	610x914	26-5/16 x 40-1/2	668 x 1029	2-shelf	46.0	20.5	MQUC2436G-25	586.00
18x30	457x760	20-5/16 x 34-1/2	516 x 876	3-shelf	46.0	20.5	MQUC1830G-35	624.50
24x36	610x914	26-5/16 x 40-1/2	668 x 1029	3-shelf	61.5	27.5	MQUC2436G-35	687.50



Helpful Hints

- Configure a cart to your exact needs using a combination of MetroMax i™ and Q™ shelves and posts.
- Consider MetroMax i solid shelves when spill containment is required or to protect supplies from dirt during transport.
- A typical utility cart will be configured using 27" (685mm) or 33" (875mm) stem caster posts with 5" casters.

Shelves and posts: page #6-7 Casters: page #8 Handles: page #9



Solid bottom shelf and
5PCX / 5PCBX casters pictured



Add-on units with "S" hooks can only be attached to shelves supported by two or more posts.



"S" Hook
Cat. No. M9995



Intermediate "S" Hook Kit
Cat. No. MX9996



Collar plug
fits MetroMax i

"S" Hook

Add on shelving to existing units using two posts instead of four. Kit includes one "S" hook and one corner collar plug. Two kits required per storage level when configuring units end-to-end.

Cat. No. M9995

List Price 4.00 each

MetroMax i™ Intermediate "S" Hook Kit


Required when joining units at right angles with open corner and no post. Intermediate bracket connects a shelf corner to the front beam of the adjoining shelf. Kit includes one intermediate bracket, two "S" Hooks, and two corner collar plugs. See illustration for quantity required per level.

Cat. No. MX9996

List Price 10.20 each

MetroMax i™ Shelving Starter and Add-on Units

- Save time and money by eliminating adjacent posts and replacing with "S" hooks.
- Starter Units consist of four posts and indicated number of MetroMax i shelves.
- Add-On Units consist of two posts, indicated number of shelves, and two "S" Hooks per shelf, for attaching shelf to adjacent unit. To attach shelves at right angles, Intermediate "S" Hook Kits must be ordered separately.

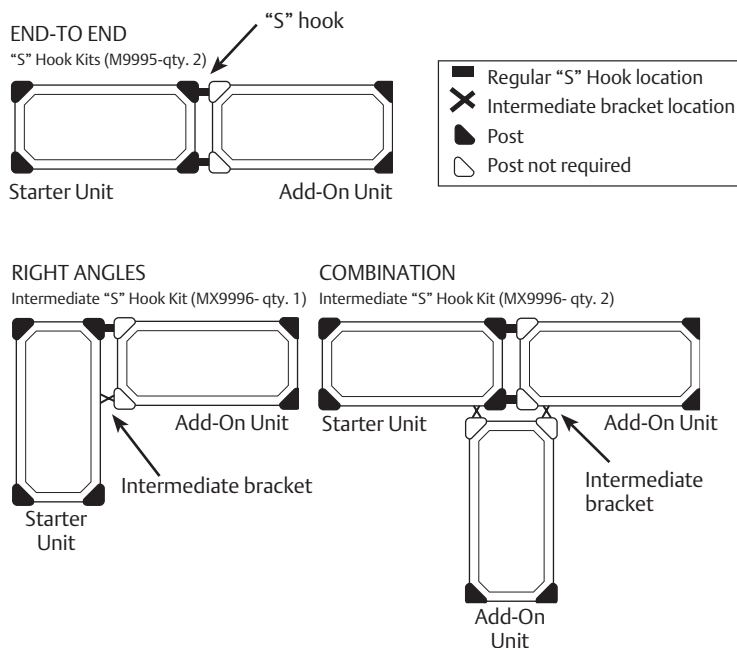

Shelving Starter and Add-on Units — Easy Order Guide

5 Shelves
74" (1880mm) Posts



		18" (457mm) Wide		24" (610mm) Wide	
		Starter	Add-On	Starter	Add-On
24"	Cat. No.	5X317GX3	5AX317GX3	5X517GX3	5AX517GX3
(610mm)	List Price Each	785.00	730.00	940.00	885.00
Long	Wt. lbs. (kg)	60 (27)	55 (25)	65 (29)	60 (27)
30"	Cat. No.	5X327GX3	5AX327GX3	5X527GX3	5AX527GX3
(760mm)	List Price Each	797.50	742.50	952.50	897.50
Long	Wt. lbs. (kg)	65 (29)	60 (27)	80 (36)	75 (34)
36"	Cat. No.	5X337GX3	5AX337GX3	5X537GX3	5AX537GX3
(914mm)	List Price Each	812.50	757.50	965.00	910.00
Long	Wt. lbs. (kg)	70 (32)	65 (29)	85 (39)	80 (36)
42"	Cat. No.	5X347GX3	5AX347GX3	5X547GX3	5AX547GX3
(1066mm)	List Price Each	947.50	892.50	1,110.00	1,055.00
Long	Wt. lbs. (kg)	80 (36)	75 (34)	95 (43)	90 (41)
48"	Cat. No.	5X357GX3	5AX357GX3	5X557GX3	5AX557GX3
(1219mm)	List Price Each	957.50	902.50	1,110.00	1,055.00
Long	Wt. lbs. (kg)	90 (41)	85 (39)	105 (48)	100 (45)
60"	Cat. No.	5X367GX3	5AX367GX3	5X567GX3	5AX567GX3
(1524mm)	List Price Each	1,072.50	1,017.50	1,290.00	1,235.00
Long	Wt. lbs. (kg)	110 (50)	105 (48)	115 (52)	110 (50)
72"	Cat. No.	5X377GX3	5AX377GX3	5X577GX3	5AX577GX3
(1825mm)	List Price Each	1,257.50	1,202.50	1,510.00	1,455.00
Long	Wt. lbs. (kg)	125 (57)	120 (54)	145 (66)	140 (64)

Note: "Right Angle" Add-On Units require one additional Intermediate "S" Hook kit per shelf level.

MetroMax iQ™ Storage System

MetroMax Q™ Shelving Starter and Add-on Units

- Save time and money by eliminating adjacent posts and replacing with "S" hooks.
- Starter Units consist of four posts and indicated number of MetroMax Q shelves.
- Add-On Units consist of two posts, indicated number of shelves, and two "S" Hooks per shelf, for attaching shelf to adjacent unit. To attach shelves at right angles, Intermediate "S" Hook Kits must be ordered separately.

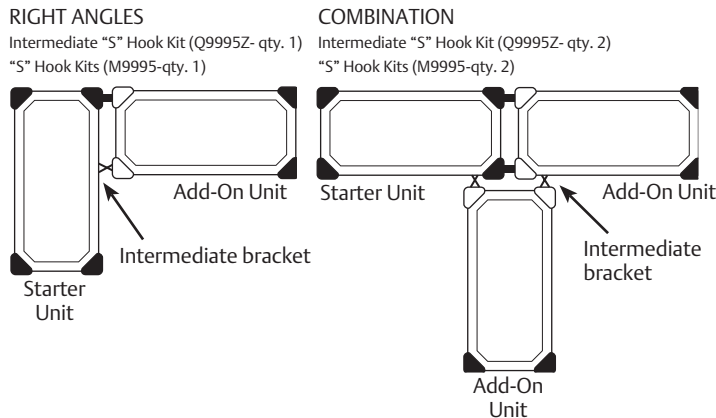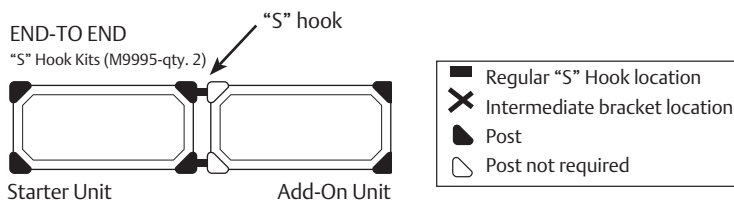

Add-on units with "S" hooks can only be attached to shelves supported by two or more posts.

"S" Hook

Add on shelving using two posts instead of four. Includes one "S" hook and one corner collar plug. Two kits required per level when configuring units end-to-end.

Cat. No. M9995 List Price 4.00 each



"S" Hook – Cat. No. M9995

MetroMax Q™ Intermediate "S" Hook Kit

Use when configuring MetroMax Q Starter and Add-On Units at right angles.

Cat. No. Q9995Z List Price 4.90 each



Intermediate "S" Hook Kit
Cat. No. Q9995Z

Shelving Starter and Add-On Units — Easy Order Guide

5 Shelves
74" (1880mm) Posts

		18" (457mm) Wide		21" (530mm) Wide		24" (610mm) Wide	
		Starter	Add-On	Starter	Add-On	Starter	Add-On
24"	Cat. No.	5Q317G3	5AQ317G3	5Q417G3	5AQ417G3	5Q517G3	5AQ517G3
(610mm)	List Price Each	534.50	517.50	589.50	572.50	617.00	600.00
Long	Wt. lbs. (kg)	50.4 (23)	40.4 (18)	56.4 (26)	46.4 (21)	56.4 (26)	46.4 (21)
30"	Cat. No.	5Q327G3	5AQ327G3	5Q427G3	5AQ427G3	5Q527G3	5AQ527G3
(760mm)	List Price Each	554.50	537.50	599.50	582.50	629.50	612.50
Long	Wt. lbs. (kg)	57.9 (26)	47.9 (22)	63.1 (29)	53.1 (24)	66.4 (30)	56.4 (26)
36"	Cat. No.	5Q337G3	5AQ337G3	5Q437G3	5AQ437G3	5Q537G3	5AQ537G3
(914mm)	List Price Each	564.50	547.50	612.00	595.00	639.50	622.50
Long	Wt. lbs. (kg)	65.4 (30)	55.4 (25)	70.9 (32)	60.9 (28)	76.4 (35)	65.4 (30)
42"	Cat. No.	5Q347G3	5AQ347G3	5Q447G3	5AQ447G3	5Q547G3	5AQ547G3
(1066mm)	List Price Each	634.50	617.50	682.00	665.00	752.00	735.00
Long	Wt. lbs. (kg)	72.9 (33)	62.9 (29)	82.1 (37)	72.1 (33)	86.4 (39)	78.4 (36)
48"	Cat. No.	5Q357G3	5AQ357G3	5Q457G3	5AQ457G3	5Q557G3	5AQ557G3
(1219mm)	List Price Each	634.50	617.50	682.00	665.00	752.00	735.00
Long	Wt. lbs. (kg)	80.4 (36)	70.4 (32)	89.4 (41)	79.4 (36)	96.4 (44)	86.4 (39)
60"	Cat. No.	5Q367G3	5AQ367G3	5Q467G3	5AQ467G3	5Q567G3	5AQ567G3
(1524mm)	List Price Each	714.50	697.50	787.00	770.00	852.00	835.00
Long	Wt. lbs. (kg)	95.4 (43)	85.4 (39)	106.4 (48)	96.4 (44)	116.4 (53)	106.4 (48)
72"	Cat. No.	5Q377G3	5AQ377G3	5Q477G3	5AQ477G3	5Q577G3	5AQ577G3
(1825mm)	List Price Each	837.00	820.00	934.50	917.50	987.00	970.00
Long	Wt. lbs. (kg)	110.4 (50)	100.4 (46)	121.4 (55)	111.4 (51)	136.4 (62)	126.4 (57)

Organize.

Organize supplies to improve operational efficiencies.

- Well-organized storage results in fewer expired supplies and less waste.
- Innovative shelf and accessory designs have smooth surfaces that protect vacuum sealed and other packaged items from damage.
- Flexible compartments help sort supplies for faster access and maximize the use of storage space.

A Dividers **B** Ledges **C** Enclosure Panels **D** Metro Totes **E** Metro Bins



Flexible Compartments

Dividers and Ledges can be used to create flexible compartments that most efficiently use available storage space. When combined with open grid shelves this minimizes dust accumulation.

Bins offer removable compartmentalized storage for easy access or as part of an exchange system.




8" (203mm) Shelf Dividers – standard duty 9.25

- i and Q versions available
- Use to create organized compartments or to simply separate shelf contents.
- Easily repositioned on grid and solid shelves
- Corrosion proof

Nominal Length		Approx. Pkd. Wt.		i	Q	List Price Each
(in)	(mm)	(lb)	(kg)	Cat. No.	Cat. No.	
18	457	1.3	0.6	MXD18-8	MQD18-8	17.50
24	610	1.6	0.7	MXD24-8	MQD24-8	19.50

*Note: Can be retrofitted to original MetroMax and MetroMax Q.



Universal 8" (203mm) Shelf Dividers – light duty, for open grid shelves 9.25

- For use with MetroMax i and Q grid shelves, Super Erecta wire shelves, and Super Adjustable wire shelves.
- Maximum flexibility: Can be repositioned along the entire shelf.
- Each divider includes a panel and two clips to connect to any open grid or wire shelf. Does not attach to solid shelves.
- Corrosion proof.

Nominal Length		Fits Shelf Depth	Approx. Pkd. Wt.		i and Q	List Price Each
(in)	(mm)		(lb)	(kg)	Cat. No.	
18	457	18", 21" (457, 530mm)	1.3	0.6	MUD18-8	17.50
24	610	24" (610mm)	1.6	0.7	MUD24-8	19.50

*Note: Can be retrofitted to original MetroMax and MetroMax Q.

Additional clips: Cat. No DCLIP, 2 per bag, List Price 5.00

Accessorize.

Shelf-to-Shelf Dividers 9.25

- Full height dividers efficiently compartmentalize the space between two shelves.
- Smooth surfaces protect packaged items from damage.
- Corrosion proof.
- Compatible with MetroMax i and Q open grid shelves, Super Erecta wire shelves, and Super Adjustable wire shelves. Does not work with solid shelves.

Fits Shelf Depth		Nominal Height		Approx. Pkd. Wt.		i and Q	List Price
(in)	(mm)	(in)	(mm)	(lb)	(kg)	Cat. No.	Each
18", 21"	457, 530	16	406	2.3	1.0	MD18-16	46.00
18", 21"	457, 530	20	508	2.5	1.1	MD18-20	51.00
18", 21"	457, 530	24	610	3.8	1.7	MD18-24	56.00
24"	610	16	406	2.8	1.2	MD24-16	50.00
24"	610	20	508	3.0	1.3	MD24-20	55.00
24"	610	24	610	4.4	2.0	MD24-24	60.00

*Note: Can be retrofitted to original MetroMax and MetroMax Q shelves.

*Note: -16 parts have three panels, -20 parts have four panels, -24 parts have five panels



2" (51mm) Stackable Shelf Ledges 9.25

- Prevent items from falling off shelves.
- Snap on and off quickly. Easily stacked to contain larger items.
- Corrosion proof.
- Ships assembled.

Nominal Length		Type	Approx. Pkd. Wt.		i	Q	List Price
(in)	(mm)		(lb)	(kg)	Cat. No.	Cat. No.	Each
18	457	Side	0.50	0.2	MXLS18-2S	MQLS18-2S	18.50
21	530	Side	0.50	0.2	-	MQLS21-2S	19.00
24	610	Side	0.50	0.2	MXLS24-2S	MQLS24-2S	19.50
24	610	Back	0.50	0.2	MXL24-2S	MQL24-2S	19.50
30	760	Back	0.75	0.3	MXL30-2S	MQL30-2S	21.50
36	914	Back	1.00	0.4	MXL36-2S	MQL36-2S	25.00
42	1066	Back	1.25	0.6	MXL42-2S	MQL42-2S	30.50
48	1219	Back	1.25	0.6	MXL48-2S	MQL48-2S	30.50
54	1370	Back	1.50	0.7	MXL54-2S	MQL54-2S	34.00
60	1524	Back	1.75	0.8	MXL60-2S	MQL60-2S	34.00
72	1829	Back	2.00	0.9	MXL72-2S	MQL72-2S	39.00

*Note: MetroMax i wire ledges can be retrofitted to original MetroMax

*Note: MetroMax Q wire ledges (MQ-) cannot be retrofitted to original MetroMax Q



4" (102mm) Solid Clear Stackable Shelf Ledges 9.26

- Solid design helps contain small items.
- Clear plastic allows light penetration and visible access to supplies.
- Corrosion proof.
- Ships assembled.

Nominal Length		Type	Approx. Pkd. Wt.		i	Q	List Price
(in)	(mm)		(lb)	(kg)	Cat. No.	Cat. No.	Each
18	457	Side	0.50	0.2	MXLS18-4P	MQLS18-4P	
21	530	Side	0.50	0.2	-	MQLS21-4P	
24	610	Side	0.50	0.2	MXLS24-4P	MQLS24-4P	
24	610	Back	0.50	0.2	MXL24-4P	MQL24-4P	
30	760	Back	0.75	0.3	MXL30-4P	MQL30-4P	
36	914	Back	1.00	0.4	MXL36-4P	MQL36-4P	
42	1066	Back	1.25	0.6	MXL42-4P	MQL42-4P	
48	1219	Back	1.25	0.6	MXL48-4P	MQL48-4P	
54	1370	Back	1.50	0.7	MXL54-4P	MQL54-4P	
60	1524	Back	1.75	0.8	MXL60-4P	MQL60-4P	

*Note: MetroMax i clear ledges can be retrofitted to original MetroMax

*Note: MetroMax Q clear ledges (MQ-) cannot be retrofitted to original MetroMax Q



Contain it.

Efficiently enclose and contain
with Enclosure Panels.



Use shelf to shelf
dividers with enclosure
panels to create full
height compartments to
organize bulky, hard-to-
handle supplies.

Enclosure Panels 9.25

- An efficient way of enclosing the sides and back of all shelves in a unit to contain stored contents.
- Slot opening: 3" W x 3-7/8" H
- Designed to work with MetroMax i™ and MetroMax Q shelves. Mounting clips included.

Actual Width/Height		Post Height		Shelf Width		Approx. Pkd. Wt.		i and Q	List Price
(in)	(mm)	(in)	(mm)	(in)	(mm)	(lbs)	(kg)	Cat. No.	Each
12-3/8 x 51-1/4	315 x 1300	54	1370	18	457	6-1/4	2.8	MEP35E	81.50
12-3/8 x 59-1/4	315 x 1505	63	1600	18	457	7	3.2	MEP36E	85.00
12-3/8 x 71-1/4	315 x 1810	74	1880	18	457	8-3/4	4.0	MEP37E	94.00
18-3/8 x 51-1/4	467 x 1300	54	1370	21, 24	530, 610	9	4.1	MEP55E	88.00
18-3/8 x 59-1/4	467 x 1505	63	1600	21, 24	530, 610	10-1/4	4.7	MEP56E	98.00
18-3/8 x 71-1/4	467 x 1810	74	1880	21, 24	530, 610	11-3/4	5.3	MEP57E	101.50

*Note: Can be retrofitted to original MetroMax and MetroMax Q shelving

Panels Required to Enclose Both ends of the Shelving Unit or Cart

Post Height	Shelf Width		
	18" (457mm)	21" (530mm)	24" (610mm)
54" (1370mm)	(2) MEP35E	(2) MEP55E	(2) MEP55E
63" (1600mm)	(2) MEP36E	(2) MEP56E	(2) MEP56E
74" (1880mm)	(2) MEP37E	(2) MEP57E	(2) MEP57E

Configuration Notes

1. Handles and enclosure panels can be used on the same end of the cart. Please note the following details: 21" (530mm) wide units: use the 12-3/8 (315mm) wide panel on the same end as the handle.
2. Top-Track: When using on the ends of a Top-Track mobile unit the enclosure panel must be mounted so that it does not interfere with the overhead tracks. Mobile posts on Top-Track are 74" (1880mm). The standard enclosure panel for 74" (1880mm) posts can be used but must be mounted in a lower position on the unit. As an alternative, the standard panels for a 63" (1600mm) post can be used.

Panels Required to Enclose Back of Shelving Unit or Cart

Post Height	Shelf Length					
	30" (760mm)	36" (914mm)	42" (1066mm)	48" (1219mm)	54" (1370mm)	60" (1524mm)
54" (1370mm)	(2) MEP35E	(1) MEP35E (1) MEP55E	(2) MEP55E	(2) MEP35E (1) MEP55E	(1) MEP35E (2) MEP55E	(3) MEP55E
63" (1600mm)	(2) MEP36E	(1) MEP36E (1) MEP56E	(2) MEP56E	(2) MEP36E (1) MEP56E	(1) MEP36E (2) MEP56E	(3) MEP56E
74" (1880mm)	(2) MEP37E	(1) MEP37E (1) MEP57E	(2) MEP57E	(2) MEP37E (1) MEP57E	(1) MEP37E (2) MEP57E	(3) MEP57E




Enclosure Panel



MetroMax i™ Mounting Clip

Replacements

Cat. No. RPMX3-RODTAB



MetroMax Q™ Mounting and Bottom Adapter Clips

Replacements

Cat. No. RPMQ3-RODTAB

Find it.

Label Holders

- Plastic holders snap onto shelf edge to accommodate 1" (25mm) tall adhesive label. Label not included.
- i and Q versions available.
- Optional label holder covers exist for MetroMax Q models. Cover snaps onto the label holder to hold a non-adhesive label in place or to protect any label from dirt and moisture



MetroMax i™ 9.25

Height: 1" (25mm)

Actual Length (in) (mm)		Fits Shelf Length (in) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		Label Holder Cat. No.	List Price Each
4-1/2	114	All	All	0.03	0.01	9989PX	4.50
11-9/32	285	24	610	0.14	0.06	9989X1	7.90
17-9/32	438	30	760	0.24	0.10	9989X2	10.20
23-9/32	590	36	914	0.30	0.13	9989X3	12.40
29-9/32	742	42	1060	0.35	0.15	9989X4	14.00
35-9/32	895	48	1219	0.40	0.18	9989X5	16.80
41-9/32	1047	54	1370	0.45	0.20	9989X6	17.90



MetroMax i™ Label Holder

MetroMax Q™ 9.25

Height: 1-1/2" (37mm)

Actual Length (in) (mm)		Fits Shelf Length (in) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		Label Holder Cat. No.	List Price Each	Label Holder Cover Cat. No.	List Price Each
4	102	All	All	0.03	0.01	Q04LH	4.40	Q04LHC	3.90
17-5/8	448	24	610	0.14	0.06	Q24LH	10.00	Q24LHC	6.00
23-5/8	600	30	760	0.24	0.10	Q30LH	10.00	Q30LHC	6.50
29-5/8	752	36	914	0.30	0.13	Q36LH	11.30	Q36LHC	7.00
35-5/8	905	42	1060	0.35	0.15	Q42LH	16.00	Q42LHC	9.20
41-5/8	1057	48	1219	0.40	0.18	Q48LH	16.00	Q48LHC	9.20
47-5/8	1210	54	1370	0.45	0.20	Q54LH	18.50	Q54LHC	11.30
53-5/8	1362	60	1524	0.50	0.22	Q60LH	18.50	Q60LHC	11.30
59-5/8	1514	72	1825	0.60	0.27	Q72LH	21.00	-	-




MetroMaxQ™ Label Holder

Color Shelf Markers 9.25

- Attach easily to shelf for content identification.
- Use to assign color coding to individual shelf levels, shelving units, carts, or storage areas.
- i and Q versions available.
- 6" (152mm) length.



Shelf Marker Color	Approx. Pkd. Wt. (lbs.) (kg)		i Cat. No.	Q Cat. No.	List Price Each
Blue	0.05	0.02	CSM6-BX	CSM6-BQ	5.00
Green	0.05	0.02	CSM6-GX	CSM6-GQ	5.00
Red	0.05	0.02	CSM6-RX	CSM6-RQ	5.00
Tan	0.05	0.02	CSM6-TX	CSM6-TQ	5.00
White	0.05	0.02	CSM6-WX	CSM6-WQ	5.00
Yellow	0.05	0.02	CSM6-YX	CSM6-YQ	5.00
Gray	0.05	0.02	CSM6-GRX	CSM6-GRQ	5.00

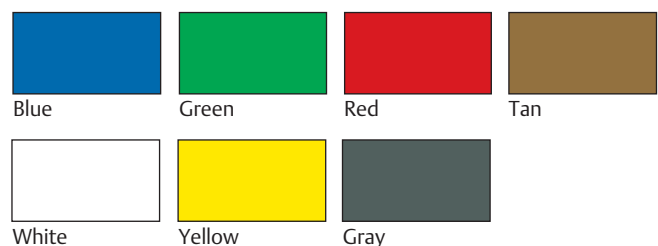



Super Slide 9.25

- Designed to fit a 24" (610mm) wide shelf.
- Easily attaches to the shelf frame (under the mats) and is sized to hold 3", 5", 6", and 8" (76, 127, 152, 203mm) tall tote boxes.
- MetroMax i™ and Q models available.
- Corrosion resistant taupe epoxy finish with Microban antimicrobial product protection.

Width		Length		Height		Approx. Pkd. Wt.		i	List Price	Q	List Price
(in)	(mm)	(in)	(mm)	(in)	(mm)	(lb)	(kg)	Cat. No.	Each	Cat. No.	Each
20-3/8	520	21-5/8	550	10-1/4	260	5-1/4	2	MXSS2E	116.00	MQSS2E	106.50



Undershelf Slide 9.25

- Available for MetroMax i only.
- Easily attaches to the MetroMax i™ shelf frame to allow you create a more versatile storage system.
- Tote box can serve as a drawer on mobile units or utility carts.
- Aluminum finish

Fits Shelf Width		Length		Approx. Pkd. Wt.		i	List Price
(in)	(mm)	(in)	(mm)	(lb)	(kg)	Cat. No.	Each
18	457	22-3/4	578	3-1/4	1.5	BSD2218XA	124.50
24	610	17-3/4	451	3-3/4	1.7	BSD2224XB	127.00



Adjustable Slides 9.25

- Slides can be adjusted left to right to accommodate a variety of pan, tray, and container sizes.
- MetroMax i™ and Q models available.
- Corrosion resistant taupe epoxy finish with Microban antimicrobial product protection.
- Shelves must be spaced 20" (508mm) apart.
- Can be used in conjunction with 20" (508mm) tall shelf-to-shelf dividers.

Fits Shelf Width		Length		Approx. Pkd. Wt.		i	List Price	Q	List Price
(in)	(mm)	(in)	(mm)	(lb)	(kg)	Cat. No.	Each	Cat. No.	Each
18	457	Adjustable		10-3/4	5	MX18SE	113.50	MQ18SE	104.50
24	610	Adjustable		12-3/4	6	MX24SE	116.00	MQ24SE	106.50



Can Rack System 9.25

- Front loading, front dispensing can rack holds eight #10 cans or twelve #5 cans.
- Tough, corrosion resistant taupe epoxy finish with Microban antimicrobial product protection.
- Designed to fit a 24" (610mm) wide shelf
- Mounts on any MetroMax i™ or MetroMax Q shelf

Overall Width/Length/Height		Approx. Pkd. Wt.		i and Q		List Price
(in)	(mm)	(lb)	(kg)	Cat. No.		Each
7-7/8 x 25-5/16 x 15	200 x 643 x 381	10	4.5	CR24E		98.00

MetroMax iQ™ Storage System

Storage Level Frames 9.25

- Open four sided frames accommodate drop-in accessories including wire baskets and stainless drying racks.
- Includes corrosion proof MetroMax i™ frame and a bag of wedges

Nominal Exterior Width (in) (mm)		Nominal Exterior Length (in) (mm)		Frame Interior Width/Length (in) (mm)		Approx. Pkd. Wt. (lb) (kg)		i and Q Cat. No.	List Price Each
18	457	24	610	18x20	457x510	4-3/4	2.2	M4F1824	90.50
18	457	30	760	18x26	457x660	6	2.7	M4F1830	100.00
18	457	36	914	18x32	457x810	7	3.2	M4F1836	106.00
18	457	42	1060	18x38	457x965	8-1/4	3.8	M4F1842	121.50
18	457	48	1220	18x44	457x1120	9-1/2	4.3	M4F1848	121.50
18	457	54	1372	18x50	457x1219	10-1/2	4.8	M4F1854	139.00
18	457	60	1524	18x56	457x1370	11-3/4	5.3	M4F1860	139.00
18	457	72	1829	18x68	457x1725	14	6.4	M4F1872	162.00
24	610	24	610	24x20	610x510	7-1/2	3.4	M4F2424	107.00
24	610	30	760	24x26	610x660	9-1/2	4.3	M4F2430	116.00
24	610	36	914	24x32	610x810	11-1/4	5.1	M4F2436	121.50
24	610	42	1060	24x38	610x965	13-1/4	6	M4F2442	132.50
24	610	48	1220	24x44	610x1120	15	6.8	M4F2448	132.50
24	610	54	1372	24x50	610x1219	17	7.7	M4F2454	153.50
24	610	60	1524	24x56	610x1370	18-3/4	8.5	M4F2460	153.50
24	610	72	1829	24x68	610x1725	22-1/2	10.2	M4F2472	189.00



Configuration Chart

QTY to fill out shelf frame.				
FRAME	B1816XE	B1822XE	B2416XE	B2422XE
M4F1836	2			
M4F1842	1	1		
M4F1848		2		
M4F1860	2	1		
M4F1872		3		
M4F2436			2	
M4F2442			1	1
M4F2448				2
M4F2460			2	1
M4F2472				3

Wire Baskets 9.25

- Conveniently hold small items
- 9" (229mm) deep
- Built in storage handles allow easy removal
- Corrosion resistant taupe epoxy finish

Width (in) (mm)		Length (in) (mm)		Approx. Pkd. Wt. (lb) (kg)		Cat. No.	List Price Each
18	457	16	406	9	4.1	MB1816XE	95.00
18	457	22	560	10	4.5	MB1822XE	108.50
24	610	16	406	10	4.5	MB2416XE	100.00
24	610	22	560	12	5.5	MB2422XE	114.50



3-sided frames 9.25

- 1" (25mm) x 1-1/2" (38mm) structural steel tubing. Includes tri-lobal adapters to attach to posts. (Replacement adapters: Cat. No. MTLA, bag of 4)
- Corrosion resistant taupe epoxy finish.
- Use when configuring work tables or as a 3-sided ledge to contain bulky items.

Width (in) (mm)		Length (in) (mm)		Approx. Pkd. Wt. (lb) (kg)		i and Q Cat. No.	List Price Each
18	457	24	610	11	5	M3TF1824E	85.00
18	457	30	760	12	5.4	M3TF1830E	86.00
18	457	36	914	13	5.7	M3TF1836E	88.00
18	457	48	1220	15	6.6	M3TF1848E	92.50
18	457	60	1524	18	8.2	M3TF1860E	108.50
24	610	24	610	12	5.4	M3TF2424E	89.00
24	610	30	760	13	5.7	M3TF2430E	91.50
24	610	36	914	14	6.4	M3TF2436E	92.50
24	610	48	1220	18	8.2	M3TF2448E	97.00
24	610	60	1524	20	9.1	M3TF2460E	117.00





MetroMax i™ Drying Rack Unit 9.31

- Allows superior air circulation and fast drying of trays, pans, lids, pots and all pot sink items.
- Promotes food safety by eliminating moisture. Offers an efficient organized drying area.
- Includes two drop-ins (Cat. No. DR48S) and one cutting board/tray drying rack (Cat. No. MTR2448XE).

Stationary Unit

Width (in)	Width (mm)	Length (in)	Length (mm)	Height (in)	Height (mm)	Approx. Pkd. Wt. (lb)	Approx. Pkd. Wt. (kg)	i Cat. No.	List Price Each
24	610	48	1219	75-1/2	1917	106	49	PR48X3	1,550.00

Mobile Unit

Width (in)	Width (mm)	Length (in)	Length (mm)	Height (in)	Height (mm)	Approx. Pkd. Wt. (lb)	Approx. Pkd. Wt. (kg)	i Cat. No.	List Price Each
24	610	48	1219	69	1917	106	49	PR48VX3	1,827.00

Stainless Steel Drop-in Racks 9.25

- Open wire design provides air flow to safely dry pots, pans, and containers
- To create a storage level with a stainless drop-in order the following
 - Qty. 1 Drop-in rack
 - Qty. 1 4-sided MetroMax i™ frame
 - Qty. 1 MetroMax i™ center beam
- Can be retrofitted to existing MetroMax i™ shelves. Simply remove the mats and drop in the stainless drying rack.
- Center beams: RPMX36-CBEAM, RPMX48-CBEAM, RPMX60-CBEAM

Width (in)	Width (mm)	Length (in)	Length (mm)	Height (in)	Height (mm)	Wire Spacing (in)	Wire Spacing (mm)	Approx. Pkd. Wt. (lb)	Approx. Pkd. Wt. (kg)	Cat. No.	List Price Each
24	610	33-7/8	854	5-1/4	133	3/4	19	9	4.1	DR36S	234.00
24	610	45-7/8	1156	5-1/4	133	3/4	19	12	5.4	DR48S	281.00
24	610	57-7/8	1458	5-1/4	133	3/4	19	15	6.8	DR60S	337.00

***Note:** Can be retrofitted to original MetroMax and MetroMax Q.

Cutting Board and Tray Drying Rack 9.25

- Rack is mounted to standard MetroMax i™ or MetroMax Q shelf
- Promotes safe air drying of cutting boards and trays
- 1-1/8" (28mm) and 3" (76mm) slide spacing available

Fits Shelf (in)	Fits Shelf (mm)	Upright Spacing (in)	Upright Spacing (mm)	Upright Height (in)	Upright Height (mm)	Tray Capacity	Approx. Pkd. Wt. (lb)	Approx. Pkd. Wt. (kg)	i and Q Cat. No.	List Price Each
24x36	457x914	1-1/8	28	6	150	24	13.5	6.1	MTR2436XE	85.00
24x48	457x1219	1-1/8	28	6	150	34	18.0	8.2	MTR2448XE	103.50
24x60	457x1524	1-1/8	28	6	150	42	22.5	10.2	MTR2460XE	119.00
24x36	457x914	3	76	6	150	10	9.8	4.4	MTR2436XEA	80.00
24x48	457x1219	3	76	6	150	14	13	5.9	MTR2448XEA	97.00
24x60	457x1524	3	76	6	150	17	16.3	7.4	MTR2460XEA	115.00

***Note:** Can be retrofitted to original MetroMax and MetroMax Q.

MetroMax iQ™ Storage System

Security.

MetroMax Q Security Units 14.01

Protects valuable materials and sensitive items from loss or pilferage.

- Ready view of contents: Heavy gauge open wire construction keep contents visible at all times, making it easy to check inventory.
- Microban antimicrobial product protection is built into the enclosures, doors, handles, and shelves to keep the product "cleaner between cleanings."
- Optional intermediate shelves: MetroMax Q quick adjust shelves or corrosion proof MetroMax i.
- Double door with ergonomic ¼-turn handle: Each door opens 270 degrees and can be secured along the sides of the unit.
- Shipped knocked down to save on freight costs. Assembles in minutes.



MQSEC53VE with optional intermediate shelves

MetroMax Q Stationary Units– 66-3/16" (1681mm) High

Actual Outside Dimensions (Including Handle)									
Width (in)	(mm)	Length (in)	(mm)	Fits Shelf (in)	(mm)	Approx. Pkd. Wt. (lb)	(kg)	Cat. No.	List Price Each
26-15/16	685	38-7/8	987	24x36	610x914	148	67	MQSEC53E	1349.50
26-15/16	685	50-7/8	1292	24x48	610x1219	156	71	MQSEC55E	1680.50
26-15/16	685	62-7/8	1597	24x60	610x1524	161	73	MQSEC56E	1823.00

Note: Leveling foot on post can be adjusted up to 1" (25mm) to compensate for uneven floors.

MetroMax Q Stem Caster Mobile Units– 67-13/16" (1723mm) High

Actual Outside Dimensions (Including Bumpers and Handle)								Includes (4) 5" (127mm) Diameter Swivel Casters Cat. No.		Includes (4) 5" (127mm) Diameter Swivel Casters Cat. No.	
Width (in)	(mm)	Length (in)	(mm)	Fits Shelf (in)	(mm)	Approx. Pkd. Wt. (lb)	(kg)	List Price Each		List Price Each	
27-13/16	707	40-3/4	1035	24x36	610x914	166	75	MQSEC53DE	1556.50	MQSEC53VE	1666.00
27-13/16	707	52-3/4	1340	24x48	610x1219	176	80	MQSEC55DE	1886.50	MQSEC55VE	1996.00
27-13/16	707	64-3/4	1645	24x60	610x1524	179	81	MQSEC56DE	2029.00	MQSEC56VE	2138.50

Note: DE models use four 5MP casters.

Note: VE models use two 5PCX and two 5PCBX casters.

MetroMax Q Heavy-Duty Mobile Units– 68-1/2" (1740mm) High

Mounted on an aluminum dolly with 5" (127mm) plate casters and wraparound bumpers.

Actual Outside Dimensions (Including Handle)									
Width (in)	(mm)	Length (in)	(mm)	Fits Shelf (in)	(mm)	Approx. Pkd. Wt. (lb)	(kg)	Cat. No.	List Price Each
28-1/16	713	39-1/8	994	24x36	610x914	166	75	MQSEC53LE	1771.50
28-1/16	713	51-1/8	1299	24x48	610x1219	176	80	MQSEC55LE	2121.00
28-1/16	713	63-1/8	1603	24x60	610x1524	179	81	MQSEC56LE	2282.50

Note: The aluminum dollies used on the LE models have two B5P and two B5PB plate casters.



Ergonomic–
1/4 turn door handle

Intermediate Shelves

				i		i		Q	
Width (in)	(mm)	Length (in)	(mm)	Shelf with Grid Mat Cat. No.	List Price Each	Shelf with Solid Mat Cat. No.	List Price Each	Shelf with Grid Mat Cat. No.	List Price Each
24	610	36	914	MX2436G	155.00	MX2436F	174.50	MQ2436G	101.50
24	610	48	1220	MX2448G	184.00	MX2448F	204.50	MQ2448G	124.00
24	610	60	1524	MX2460G	220.00	MX2460F	245.00	MQ2460G	144.00



MetroMax iQ™ qwikTRAK 11.15

Floor tracks compensate for rough or choppy floors and provide a smooth, level surface to guide the mobile units in a straight line. MetroMax i™ mobile units can hold up to 1,200 lbs. (544kg) per unit. MetroMax Q mobile units can hold up to 2,000 lbs. (544kg) per unit.

Maximizes Storage Capacity: qwikTRAK can increase the storage capacity of a given area by 30% to 40%. The system allows more storage units to fit in a defined space. A movable, open aisle allows full access to each entire shelving unit thus eliminating hard to reach or “dead” spaces.

Accessible and Ergonomic: The low profile and sloped sides of the guiding track, combined with the easy-to-move mobile units, provide safe and easy access to all stored products. Mobile units roll easily along the track, even when moving heavy loads.

Uniquely Interchangeable: Mix and match MetroMax i™ and Q shelves and posts based on the application. Corrosion proof MetroMax i™ offers solid shelf option and better chemical resistance. Corrosion resistant MetroMax Q steel posts can improve the overall rigidity of the qwikTRAK system in higher weight bearing applications.

Stationary End Unit Kit – Order one per qwikTRAK system.

- Kit includes the hardware and components needed to connect track sets to two stationary end units. 74" (1880mm) posts included. Shelves are ordered separately.

Approx. Pkd. Wt. (lbs.) (kg)		i End Unit Kit Cat. No.	List Price Each	Approx. Pkd. Wt. (lbs.) (kg)		Q End Unit Kit Cat. No.	List Price Each
25.0	11.4	BTEX3	632.00	42.0	19.1	BTEQ3	516.00

Stationary Intermediate Unit Kit – Required when the desired length of track exceeds 21' (6405mm).

- A stationary intermediate kit may be used at the discretion of the end user when track lengths are less than 21' (6405mm) to increase the overall rigidity of the system. Kit includes the hardware and components needed to connect track sets to one stationary intermediate unit. 74" (1880mm) posts included. Shelves are ordered separately.

Approx. Pkd. Wt. (lbs.) (kg)		i Int. Unit Kit Cat. No.	List Price Each	Approx. Pkd. Wt. (lbs.) (kg)		Q Int. Unit Kit Cat. No.	List Price Each
15.7	7.1	BTAX3	442.00	24.2	11.0	BTAQ3	384.00



Mobile Unit Kit – Order one per mobile unit.

- Kit includes posts, qwikTRAK casters, and bumpers. Shelves are sold separately.

Approx. Pkd. Wt. (lbs.) (kg)		i Int. Unit Kit Cat. No.	List Price Each	Approx. Pkd. Wt. (lbs.) (kg)		Q Int. Unit Kit Cat. No.	List Price Each
18.5	8.4	BTMX3	665.00	27	12.3	BTMQ3	607.00

Configuration Guidelines

- All end, intermediate, and mobile units must be 18" (457mm) or wider.
- quwikTRAK is available with 74" posts (1880mm) as standard. Requests for TALLER posts must be reviewed by Metro Engineering. For applications requiring posts SHORTER than 74" (1880mm), contact your Metro representative.
- Under normal conditions, aisle width of 30"-36" (760-914mm) is recommended. The storage of very large objects within the system, however, may require an aisle width larger than 36" (914mm).
- A stationary intermediate unit is required when the track length exceeds 21 feet (6405mm). A stationary intermediate unit may be used at the discretion of the user when the track lengths are less than 21 ft. (6405mm).
- It is recommended that the tracks are installed a minimum of 1-3/4" (45mm) from the wall.
- Actual width of a qwikTRAK system is the Nominal Shelf length + 3-1/2" (89mm).
- Actual height of a mobile qwikTRAK unit is: Nominal post height + 4.5" (115mm)
- Actual length of a qwikTRAK system is: Nominal track length + the nominal width of each end unit + 3" (76mm).
- Weight capacities for standard qwikTRAK: MetroMax Q systems are designed to hold up to 2,000 lbs. (907kg) per shelving unit. MetroMax i™ stationary units can hold up to 2,000 lbs. (907kg); MetroMax i mobile units can hold up to 1,200 lbs. (544kg) per unit.



A = Stationary End Units
B = Mobile Units
C = qwikTRAK
D = Stationary Intermediate Unit
E = Active Aisle

Track Sets – One track set is required between stationary units.

- Includes necessary sections of track for assembling track runs of 6' to 21' (1830-6405mm).

Length (feet) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No.	List Price Each	Length (feet) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No.	List Price Each
2.5	763	4.0	1.8	BTS2.5NA	360.00	14	4267	19.0	8.6	BTS14NA	940.00
6	1830	9.0	4.1	BTS6NA	367.00	15	4572	21.0	9.5	BTS15NA	1141.00
7	2135	10.0	4.5	BTS7NA	418.00	16	4877	22.0	10.0	BTS16NA	1194.00
8	2440	11.0	5.0	BTS8NA	617.00	17	5182	23.0	10.5	BTS17NA	1250.00
9	2745	13.0	5.9	BTS9NA	670.00	18	5486	25.0	11.4	BTS18NA	1304.00
10	3050	14.0	6.4	BTS10NA	725.00	19	5791	26.0	11.8	BTS19NA	1357.00
11	3355	15.0	6.8	BTS11NA	780.00	20	6096	27.0	12.3	BTS20NA	1410.00
12	3660	17.0	7.7	BTS12NA	834.00	21	6400	29.0	13.2	BTS21NA	1462.00
13	3965	18.0	8.2	BTS13NA	888.00						

Note: BTS2.5NA includes a joining kit to connect the tracks to longer track sections.

Double Deep qwikTRAK 11.15

- Greater Storage Capacity: Shelving units are joined end-to-end to create a larger storage system with greater capacity.
- Double Deep Mobile Units can easily be moved to allow efficient access to stored contents

MetroMax i™ double deep mobile units can hold up to 1,800 lbs. (818kg) per unit evenly distributed. MetroMax Q mobile units can hold up to 3,000 lbs. (544kg) per unit evenly distributed.

Stationary End Unit Kit – Order one kit per Double-Deep system.

- Kit includes the hardware and components needed to connect track sets to two Double-Deep stationary end units. 74" (1880mm) posts included. Shelves are ordered separately.

Approx. Pkd. Wt. (lbs.) (kg)		i End Unit Kit Cat. No.	List Price Each	Approx. Pkd. Wt. (lbs.) (kg)		Q End Unit Kit Cat. No.	List Price Each
42.3	19.2	LBTEX3	1,297.00	76.3	34.7	LBTEQ3	1,065.00

Stationary Intermediate Unit Kit – Required when the desired length of track exceeds 21' (6405mm).

- A stationary intermediate kit may be used at the discretion of the end user when track lengths are less than 21' (6405mm) to increase the overall rigidity of the system. Kit includes the hardware and components needed to connect track sets to one Double-Deep stationary intermediate unit. 74" (1880mm) posts included. Shelves are ordered separately.

Approx. Pkd. Wt. (lbs.) (kg)		i Int. Unit Kit Cat. No.	List Price Each	Approx. Pkd. Wt. (lbs.) (kg)		Q Int. Unit Kit Cat. No.	List Price Each
24.3	11.0	LBTAx3	917.00	41.3	18.8	LBTAQ3	801.00

Mobile Unit Kit – Order one kit per Double-Deep mobile unit.

- Kit includes posts, qwikTRAK casters, center caster channel assembly, bumpers, tie-bar brackets and other hardware to assemble a Double-Deep unit. Shelves are sold separately.

Approx. Pkd. Wt. (lbs.) (kg)		i Mobile Unit Kit Cat. No.	List Price Each	Approx. Pkd. Wt. (lbs.) (kg)		Q Mobile Unit Kit Cat. No.	List Price Each
35.5	16.1	LBTM18X3	1,379.00	57.1	26.0	LBTM18Q3	1,263.00
		-		58.1	26.4	LBTM21Q3	1,289.00
37.5	17.0	LBTM24X3	1,431.00	59.1	26.9	LBTM24Q3	1,315.00

Track Sets – One track set is required between stationary units.



- Includes tracks and hardware needed to assemble Double-Deep qwikTRAK Systems of 6' to 21' (1830-6405mm).

Length (feet) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No.	List Price Each	Length (feet) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No.	List Price Each
2.5	763	6.0	2.7	LBTS2.5NA	540.00	14	4270	28.5	13.0	LBTS14NA	1410.00
6	1830	13.5	6.1	LBTS6NA	550.50	15	4575	31.5	14.3	LBTS15NA	1711.50
7	2135	15.0	6.8	LBTS7NA	627.00	16	4880	33.0	15.0	LBTS16NA	1791.00
8	2440	16.5	7.5	LBTS8NA	925.50	17	5185	34.5	15.7	LBTS17NA	1875.00
9	2745	19.5	8.9	LBTS9NA	1005.00	18	5490	37.5	17.0	LBTS18NA	1956.00
10	3050	21.0	9.5	LBTS10NA	1087.50	19	5795	39.0	17.7	LBTS19NA	2035.00
11	3355	22.5	10.2	LBTS11NA	1170.00	20	6100	40.5	18.4	LBTS20NA	2115.00
12	3660	25.5	11.6	LBTS12NA	1251.00	21	6405	43.5	19.8	LBTS21NA	2193.00
13	3965	27.0	12.3	LBTS13NA	1332.00						

Note: LBTS2.5NA includes a joining kit to connect the tracks to longer track sections.

Double-up on space.

Double Deep qwikTRAK 11.15

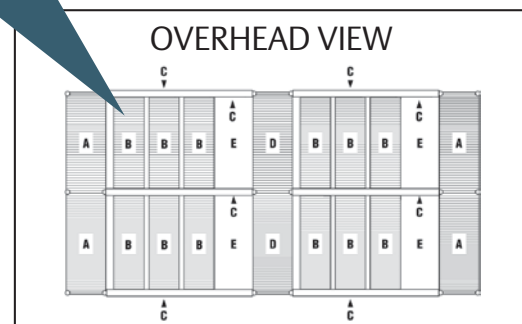

A = Stationary End Units
B = Mobile Units
C = qwikTRAK
D = Stationary Intermediate Unit
E = Active Aisle

Configuration Guidelines

1. All end, intermediate, and mobile units must be 18" (457mm) or wider.
2. Each stationary end and intermediate unit must have a minimum of four shelves.
3. Double Deep qwikTRAK is available with 74" posts (1880mm) as standard. Requests for TALLER posts must be reviewed by Metro Engineering. For applications requiring posts SHORTER than 74" (1880mm), contact your Metro representative.
4. Under normal conditions, aisle width of 30"-36" (760-914mm) is recommended. The storage of very large objects within the system, however, may require an aisle width larger than 36" (914mm).
5. Two stationary intermediate units connected end to end are required when the track length exceeds 21 feet (6405mm). Stationary intermediate units may be used at the discretion of the user when the track lengths are less than 21 ft. (6405mm).
6. It is recommended that the tracks are installed a minimum of 1-3/4" (45mm) from the wall.
7. Maximum allowable shelf length for use with a double deep system is 60" (1524mm).
8. The maximum width of a double deep configuration is 10'6" (3200mm). (i.e., two systems, each having 60" (1524mm) long shelves, plus 6" (150mm) for qwikTRAK components).
9. Actual width of a double deep configuration is the Nominal Shelf Length + 3-1/2" (89mm).
10. Weight capacities: Double Deep Mobile Units—MetroMax Q: 3,000 lbs. (1364kg) evenly distributed. MetroMax i: 1,800 lbs. (818kg) evenly distributed.
11. Stationary End and Intermediate Units — Each end and intermediate double deep unit consists of two independent stationary shelving units positioned side by side. Each shelving unit has a maximum weight capacity of 2000 lbs. (904kg) evenly distributed.



MetroMax iQ™ Top-Track 9.29

The system compensates for uneven floor surfaces. Floor should be smooth and free from large cracks or raised obstacles. Maximum load capacity for mobile units is 900 lbs. (410kg).

Maximizes Storage Capacity: Top-Track can increase the storage capacity of a given area by 30% to 40%. Put more storage units into a defined space. A movable, open aisle allows full access to each entire shelving unit—eliminating hard to reach or “dead” spaces.

Easy Access: The overhead track system guides the mobile units and opens an access aisle between any two units. The track is above the storage units enabling easy access.

Clean Design: Guide tracks are installed overhead enabling easy cleaning of floors. MetroMax i™ and MetroMax Q shelves feature removable polymer shelf mats and built-in Microban antimicrobial product protection to promote easier routine cleaning.

Uniquely Interchangeable: Mix and match MetroMax i™ and Q shelves and posts based on the application. Corrosion proof MetroMax i™ offers solid shelf option and better chemical resistance. Corrosion resistant MetroMax Q steel posts can improve the overall rigidity of the Top-Track system in higher weight bearing applications.

Stationary End Unit Kit – Order one per Top-Track system.

- Includes hardware and components to connect track sets to two stationary end units. 86" (2185mm) posts included. Shelves are ordered separately.

		i		Q	
Fits Shelf Width (in)	(mm)	End Unit Kit Cat. No.	List Price Each	End Unit Kit Cat. No.	List Price Each
18	457	MXTTE18	844.00	MQTTE18	700.00
21	530	-	-	MQTTE21	711.00
24	610	MXTTE24	865.00	MQTTE24	722.00

Stationary Intermediate Unit Kit – Required when the desired length of track exceeds 21' (6405mm).

- A stationary intermediate kit may be used at the discretion of the end user when track lengths are less than 21' (6405mm) to increase the overall rigidity of the system. Kit includes the hardware and components needed to connect track sets to one stationary intermediate unit. 86" (2185mm) posts included. Shelves are ordered separately.

		i		Q	
Fits Shelf Width (in)	(mm)	Int. Unit Kit Cat. No.	List Price Each	Int. Unit Kit Cat. No.	List Price Each
18	457	MXTTA18	500.00	MQTTA18	428.00
21	530	-	-	MQTTA21	435.00
24	610	MXTTA24	515.00	MQTTA24	443.00



Mobile Unit Kit – Order one per mobile unit.

- Kit includes posts, rigid casters, caster channels, bumpers, and roller assemblies. Shelves are sold separately.

		i		i		Q		Q	
Fits Shelf Width (in)	(mm)	w/ Plated Casters Cat. No.	List Price Each	w/ Stainless Casters Cat. No.	List Price Each	w/ Plated Casters Cat. No.	List Price Each	w/ Stainless Casters Cat. No.	List Price Each
18	457	MXTTM18C	434.00	MXTTM18S	710.00	MQTTM18C	376.00	MQTTM18S	652.00
21	530	-	-	-	-	MQTTM21C	387.00	MQTTM21S	662.00
24	610	MXTTM24C	456.00	MXTTM24S	730.00	MQTTM24C	398.00	MQTTM24S	672.00

Configuration Guidelines

- Standard Top-Track models include 86" (2185mm) stationary posts and 74" (1880mm) stem caster mobile posts. If a taller system is required, consult Metro Engineering.
- Mobile, stationary end, and intermediate units must have a minimum of 4 shelves.
- Stationary Intermediate Unit is required when the track length exceeds 21' (6405mm). Intermediate kits include special support rails that attach to the overhead tracks on both sides of the intermediate unit. A stationary intermediate unit may be used at the discretion of the user when track lengths are less than 21' (6405mm) for the purpose of adding greater stability to the overall system.
- Mobile Units: If 18" (457mm) wide mobile units are planned, the maximum allowable size shelf is 60" (1524mm) long. If 18" (457mm) wide by 60" (1524mm) long mobile units are planned, a maximum of five 18" (457mm) mobile units are allowable between two stationary units. 18" (457mm), 21" (530mm) and 24" (610mm) wide mobile units can be intermixed in a given system. The standard system requires 74" (1880mm) posts on the mobile units. Recommended maximum load rating for a mobile unit is 900 lbs. (410kg).
- Under normal conditions, an aisle of 30" to 36" (760-914mm) is recommended. The storage of very large objects within the system, however, may require an aisle width larger than 36" (914mm).
- To accommodate bumpers, the actual size of a mobile unit is 2.5" (63.5mm) wider than the shelf width shown. For example, an 18" (457mm) wide unit is actually 20.5" (521mm).
- To calculate the overall length of a MetroMax or MetroMax Q Top-Track System, add the following: Nominal track length + Nominal widths of each end unit + 2" (51mm).



- A = Stationary End Units
- B = Stationary Intermediate Unit (Optional)
- C = Track Set
- D = Mobile Units
- E = Open Aisle

Track Sets – One track set is required between stationary units

- Includes necessary sections of track for assembling track runs of 6' to 21' (1830-6405mm).

Length (feet)	(mm)	Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No.	List Price Each	Length (feet)	(mm)	Approx. Pkd. Wt. (lbs.)	(kg)	Cat. No.	List Price Each
2-1/2	762	15	6.8	TTS2.5NA	372.00	14	4267	98	44.1	TTS14NA	1,018.00
6	1828	40.5	18.2	TTS6NA	399.00	15	4572	106.5	47.9	TTS15NA	1,234.00
7	2135	47.5	21.3	TTS7NA	453.00	16	4877	113.5	51	TTS16NA	1,292.00
8	2440	56	25.2	TTS8NA	669.00	17	5182	121	54.4	TTS17NA	1,354.00
9	2743	62.5	28.1	TTS9NA	726.00	18	5486	128	51.6	TTS18NA	1,412.00
10	3048	69.5	31.2	TTS10NA	785.00	19	5791	135	60.7	TTS19NA	1,467.00
11	3353	76.5	34.4	TTS11NA	846.00	20	6096	142	63.9	TTS20NA	1,526.00
12	3657	83.5	37.5	TTS12NA	903.00	21	6400	149	67	TTS21NA	1,582.00
13	3962	92	41.4	TTS13NA	961.00						

Note: TTS2.5NA includes a joining kit to connect the tracks to longer track sections.

Compare.

See how MetroMax iQ™ Storage System stacks up to other shelving styles available.

	Stainless Steel Solid/Wire	MetroMax iQ™ Polymer	MetroMax Q™ Polymer & Epoxy Coated Steel	Super Adjustable™ Wire Shelving Epoxy Coated/Plated	Standard Wire Shelving Epoxy Coated/Plated
Easily Cleanable	●/○	●	●	●	●
Quick to Adjust	○	●	●	●	○
Corrosion Protection in wet / moist environments	●	●	●	○/●	○/●
Abrasion Resistant	●	●	●	○/●	○/●
Strength	●	●	●	●	●
Smooth Surfaces	●/○	●	●	○	○
Chemical Resistance to common cleaners / sanitizers	●	●	●	○	○
Storage Capacity	●	●	●	●	●
Antimicrobial Protection	N/A	●	●	● / N/A	● / N/A
Accessories	○	●	●	●	●
Organization	○	●	●	●	●
Mobility	●	●	●	●	●
High Temp. Cart Wash	●	○	●	●	●
Autoclave Sterilization	●	●	●	●	●

- Excellent
- Above Average
- Average
- Below Average
- Not Recommended
- N/A Not Applicable



We put space to work.™

Uniquely Integrated :-)

www.metro.com/iQ

MetroMax iQ™ Shelving System is supported with interactive online tools to help you configure a storage solution that is right for you. Visit www.metro.com/iQ where videos provide an introduction to the system. View MetroMax iQ™ configurations with tips that point out the best uses of the system. Then, use the online configurator to help you build the exact shelving system you desire. Finally, find all the literature and support materials in one convenient location. MetroMax iQ™ is uniquely integrated.

1 - 8 0 0 - 4 3 3 - 2 2 3 2

U.S. and Canada Product Information

Corporate Headquarters
651 North Washington Street
Wilkes-Barre, PA 18705
Phone: 570.825.2741
Fax: 570.825.2852

Intermetro Industries B.V.
Heerbaan 242
4817 NL BREDA
The Netherlands
Tel: +31 76 587 7550
Fax: +31 76 581 1313

Asia/Pacific
Metro International Corporation
100 Cecil Street
#09-01 The Globe
Singapore 069532
Singapore
Phone: .65.6372.1092
Fax: .65.6372.1094

Latin America
Metro International Corporation
16562 83rd Place North
Loxahatchee, FL 33470
Phone: 1.561.333.3824
Fax: 1.561.792.6351



inhibits the growth of stain and odor causing bacteria.
Microban does not protect users from food borne illness.
Normal cleaning practices should be maintained. Microban
is a registered trademark of Microban Products Company

© 2009 InterMetro Industries Corporation, Wilkes-Barre, PA 18705
The Emerson logo is a trademark and a service mark of Emerson Electric Company.

