

PT0068MBNAMSA - SUBMITTAL



| | | | |
|----------------|--|-------------------|------|
| Project Name: | | Project Location: | |
| Quote ID: | | Item #: | 1000 |
| Submitted For: | | Submitted On: | |
| Submitted By: | | Submitted From: | |
| Identity #: | | Tag: | |

☐ For Record

☐ For Approval

By: _____

Date: _____

General Product Information

| | | | |
|--------------------|-------------|-------------------------|--------------|
| Product Family: | PTN | Voltage: (Volts/Ph/Hz) | 208-230/1/60 |
| Application: | Indoor | Refrigerant Type: | R448A |
| Temperature Range: | Medium Temp | Unit Cooler Motor Type: | VSEC |
| Defrost Type: | Air | Compressor Model: | ZB06KAE |

Technical Information

Performance Data

| Application Capacity* | | | Unit Cooler CFM | Altitude | AWEF Value |
|-----------------------|-------------------|----------------------------------|--------------------|----------|------------|
| Ambient Temp (°F) | Room Temp (°F) | Application Capacity* (BTU/H) | | | |
| 95 | 35 | 6,620 | 550 | 0 | 5.61 |


Electrical Data

| MCA | MOPD | Unit Amps |
|-----|------|-----------|
| 9.3 | 15 | 8 |

Unit Specifications

| Plug Supplied? | Matching NEMA Receptacle Number | Approx. Net Weight (lbs) |
|----------------|---------------------------------------|-----------------------------|
| YES | 6-15R | 215 |

Dimensional Drawing(s)

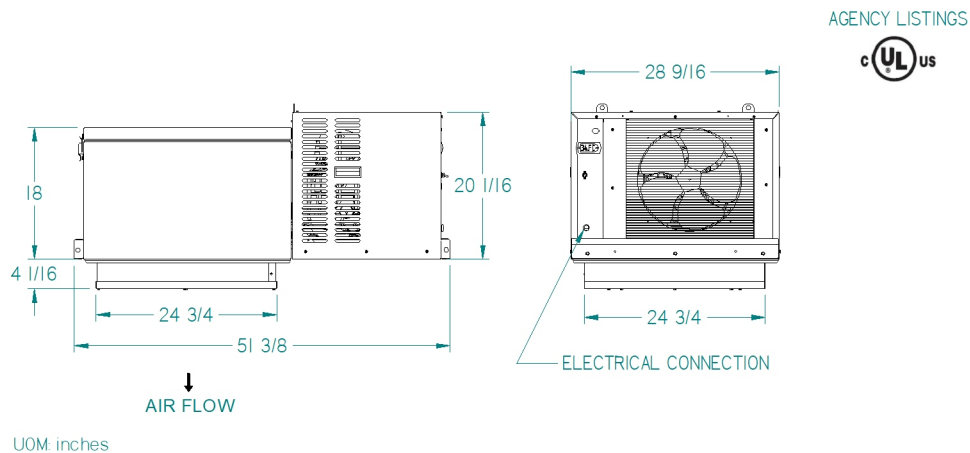



| | | | |
|----------------|--|-------------------|------|
| Project Name: | | Project Location: | |
| Quote ID: | | Item #: | 1000 |
| Submitted For: | | Submitted On: | |
| Submitted By: | | Submitted From: | |
| Identity #: | | Tag: | |

Standard Features

AESTHETICS

- STUCCO-ALUMINUM FINISH

RELIABLE & DURABLE

- LIQUID-LINE FILTER DRIER (MEDIUM AND LARGE CABINET ONLY)
- TWO-YEAR PARTS WARRANTY

EASE OF INSTALLATION

- PRE-CHARGED WITH REFRIGERANT
- NO REFRIGERANT PIPING REQUIRED
- EVAPORATIVE CONDENSATE PAN (INDOOR UNITS ONLY)
- ALL UNITS GET A REMOVABLE TOP PANEL WITH LATCHES
- ALL P1 & SELECT P2 & P3 UNITS COME WITH A POWER CORD

PERFORMANCE

- MAXIMUM VERTICAL STORAGE CAPACITY
- IDEAL FOR HOLDING TEMPERATURE
- MEDIUM-TEMP AIR AND ELECTRIC DEFROST
- LOW-TEMP ELECTRIC DEFROST


ENERGY EFFICIENCY

- P1 UNITS USE SINGLE SPEED EC MOTORS (EVAPORATORS)
- P2 & P3 UNITS USE 2 SPEED EC MOTORS (EVAPORATORS)
- P2 & P3 UNITS USE SINGLE SPEED EC MOTORS (CONDENSERS, PT0046M USES PSC)
- P2 & P3 UNITS USE A MICROCHANNEL CONDENSER FOR HIGHER EFFICIENCY & CORROSION PROTECTION

CONTROLS

- MICROPROCESSOR CONTROL

Minimum Unit Clearances

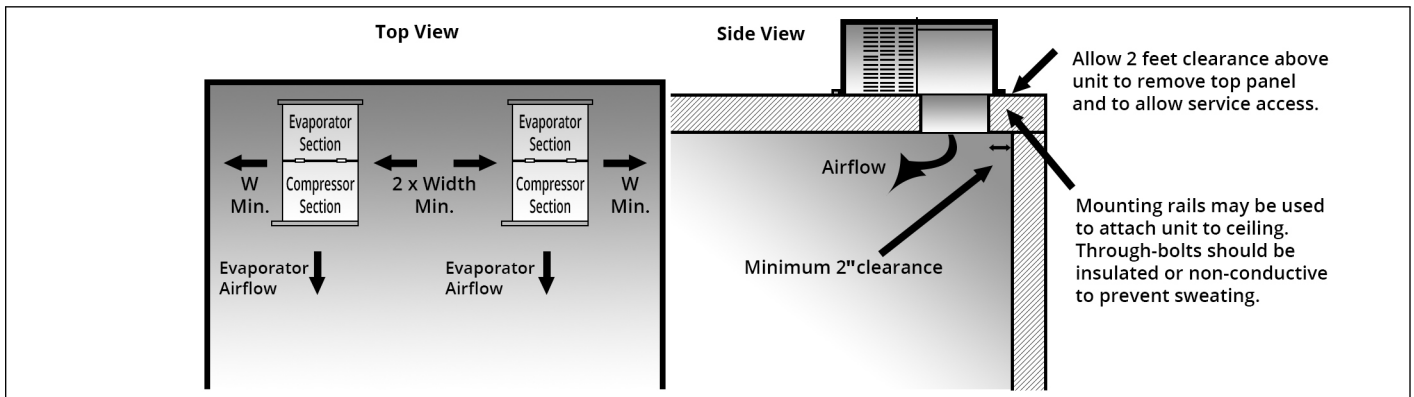

* Capacities shown are Application Capacities reflecting nominal operation at 10°F TD. For models within the scope of the DOE AWEF (Annual Walk-in Energy Factor) standard, the Net Capacity is determined by the AHRI 1250 test method. DOE will publish this compliance data at www.regulations.doe.gov